

n55 parete soffitto

mario nanni 2014








corpo illuminante parete soffitto per interni IP20 realizzato in alluminio ossidato argento hacca o nero 55. predisposto per essere cablato con tre tipi di propulsore: propulsore 55/350 cablato con led da 10,8W/350mA 1240lm Ra98, step macadam 1, classe energetica A++; propulsore 55/500 cablato con led da 15,6W/500mA 1580lm Ra98, step macadam 1, classe energetica A+; propulsore 65/700 cablato con led da 22,3W/700mA 2140lm Ra98, step macadam 1, classe energetica A+. tutti i propulsori sono disponibili 2700K e 3000K e sono configurabili attraverso l'apposito attacco portalampada n55, con tre tipi di lampadine: lampadina classica (trasparente, satinata e bianco latte), lampadine decorative e lampadine tecniche che si possono inter-cambiare a piacimento con estrema facilità. all'interno del supporto di fissaggio a parete è presente un alimentatore con controllo intelligente 110-240V che fornisce automaticamente la corrente adeguata al tipo di propulsore e può essere dimmerato attraverso un potenziometro 1-10V accessorio.



IP20-rated indoor wall/ceiling light fitting made of black 55 or argento hacca oxidised aluminium. ready to be wired with three types of propellers: 55/350 propeller wired with 10,8W/350mA 1240lm Ra98 leds, step macadam 1, A++ energy efficiency class; 55/500 propeller wired with 15,6W/500mA 1580lm Ra98 leds, step macadam 1, A+ energy efficiency class; 65/700 propeller wired with 22,3W/700mA 2140lm Ra98 leds, step macadam 1, A+ energy efficiency class. all the dissipators are available in 2700K and 3000K version and are configurable by means of the specific n55 lamp-holder, with three types of light bulbs: standard bulb (transparent, satin and milk white), decorative bulbs and technical bulbs that can be interchanged at will and very easily. inside the wall-mounting support there is a 110-240V intelligent controlled power supply unit that automatically provides the suitable current for the type of propeller and that can be dimmed by means of an optional remote 1-10V potentiometer.






n55 parete soffitto	propulsore propeller	lampadina classica classic bulb	lampadina decorativa decorative bulb	lampadina tecnica technical bulb
n55 p.s. alimentatore integrato integrated power supply 	propulsore 55/350  350mA 1240 lm 10,8W 115 lm/W A++ propulsore 55/500  500mA 1580 lm 15,6W 101 lm/W A+ propulsore 65/700  700mA 2140 lm 22,3W 96 lm/W A+	hm01  hm02 	mn01  dc01  dc02  pz01  kk01  wm01 	spot 35  80° spot 55  43°  25° 40° 60° spot 82  10° 25° 40° 60° spot 100  10° 25° 40° 60°


propulsore 55/350



propulsore 55/500



propulsore 65/700



n55 p.s. 110-240V 50-60Hz A ECG IP20 CE i

Vb6.580.01 argento hacca

Vb6.580.02 nero 55
black 55

Ra	R9	selezione macadam macadam selection	mA	lm	W	lm/W	classe energetica energy class
98	98	step 1	350	1240	10,8	115	A++
			500	1580	15,6	101	A+
			700	2140	22,3	96	A+
			1050	3000	34	88,2	A+

accessori. accessories

CE i

Vb9.580.90 potenziometro 1-10V remoto
remote 1-10V potentiometer

propulsore 55/350 A IP20 CE i

Vb9.580.50.27 argento hacca led 2700K 10,8W/350mA

Vb9.580.51.27 nero 55
black 55 led 2700K 10,8W/350mA

Vb9.580.50.30 argento hacca led 3000K 10,8W/350mA

Vb9.580.51.30 nero 55
black 55 led 3000K 10,8W/350mA

Ra	R9	selezione macadam macadam selection	mA	lm	W	lm/W	classe energetica energy class
98	98	step 1	350	1240	10,8	115	A++

tensione minima sul secondario/minimum voltage on the secondary 30,9V
vita media/average life 70000 h



propulsore 55/500					IP20			
Vb9.580.62.27	argento hacca	led 2700K	15,6W/500mA					
Vb9.580.63.27	nero 55 black 55	led 2700K	15,6W/500mA					
Vb9.580.62.30	argento hacca	led 3000K	15,6W/500mA					
Vb9.580.63.30	nero 55 black 55	led 3000K	15,6W/500mA					

Ra	R9	selezione macadam macadam selection	mA	lm	W	lm/W	classe energetica energy class
98	98	step 1	500	1580	15,6	101	A+

tensione minima sul secondario/minimum voltage on the secondary 30,9V
vita media/average life 70000 h



propulsore 65/700					IP20			
Vb9.580.54.27	argento hacca	led 2700K	22,3W/700mA					
Vb9.580.55.27	nero 55 black 55	led 2700K	22,3W/700mA					
Vb9.580.54.30	argento hacca	led 3000K	22,3W/700mA					
Vb9.580.55.30	nero 55 black 55	led 3000K	22,3W/700mA					

Ra	R9	selezione macadam macadam selection	mA	lm	W	lm/W	classe energetica energy class
98	98	step 1	700	2140	22,3	96	A+

tensione minima sul secondario/minimum voltage on the secondary 31,8V
vita media/average life 50000 h

lampadina classica. classic bulb.




mario nanni		CE	i
-------------	--	----	---

Vb9.580.01.T hm01 trasparente
hm01 transparent

Vb9.580.01.S hm01 satinata
hm01 frosted

Vb9.580.01.B hm01 bianco latte
hm01 milk white




Vb9.580.02.T hm01 trasparente
hm01 transparent

Vb9.580.02.S hm01 satinata
hm01 frosted

Vb9.580.02.B hm01 bianco latte
hm01 milk white



lampadina decorativa. decorative bulb.




david chipperfield CE 

Vb9.580.05.S dc01 satinato
 dc01 frosted



Vb9.580.06.S dc02 satinato
 dc02 frosted



mario nanni CE 

Vb9.580.03.S mn01 satinato
 mn01 frosted






kengo kuma

CE ⓘ

Vb9.580.07.C

kk01 cristallo
kk01 crystal




peter zumthor

CE ⓘ

Vb9.580.08.S

pz01 satinato
pz01 frosted



winy maas

CE ⓘ

Vb9.580.09.S

wm01 satinato
wm01 frosted



lampadina tecnica. technical bulb.



spot 35			CE	i
Vb9.580.21	argento hacca	80°		
Vb9.580.22	nero 55 black 55	80°		



spot 55			CE	i
Vb9.580.45	argento hacca	43°		
Vb9.580.46	nero 55 black 55	43°		




Vb9.580.23	argento hacca	25°		
Vb9.580.24	nero 55 black 55	25°		
Vb9.580.25	argento hacca	40°		
Vb9.580.26	nero 55 black 55	40°		
Vb9.580.27	argento hacca	60°		
Vb9.580.28	nero 55 black 55	60°		









spot 82			CE	i
Vb9.580.29	argento hacca	10°		
Vb9.580.30	nero 55 black 55	10°		
Vb9.580.31	argento hacca	25°		
Vb9.580.32	nero 55 black 55	25°		
Vb9.580.33	argento hacca	40°		
Vb9.580.34	nero 55 black 55	40°		
Vb9.580.35	argento hacca	60°		
Vb9.580.36	nero 55 black 55	60°		



spot 100			CE	i
Vb9.580.37	argento hacca	10°		
Vb9.580.38	nero 55 black 55	10°		
Vb9.580.39	argento hacca	25°		
Vb9.580.40	nero 55 black 55	25°		
Vb9.580.41	argento hacca	40°		
Vb9.580.42	nero 55 black 55	40°		
Vb9.580.43	argento hacca	60°		
Vb9.580.44	nero 55 black 55	60°		





montaggio n55 p.s.
mounting n55 p.s.

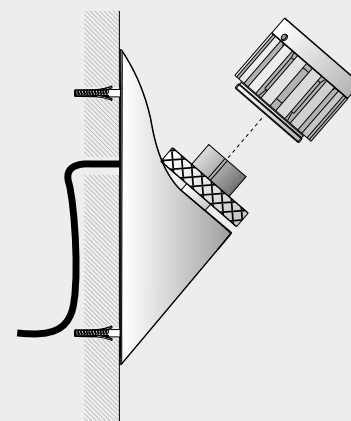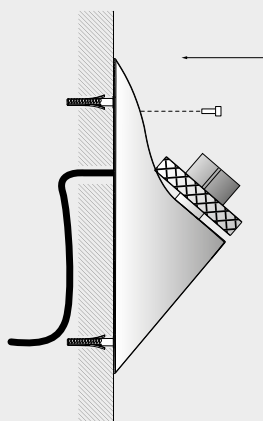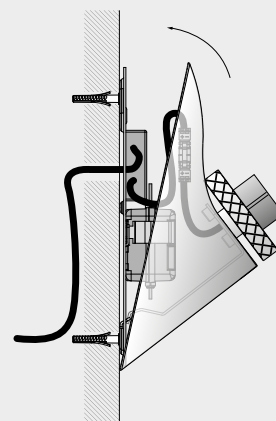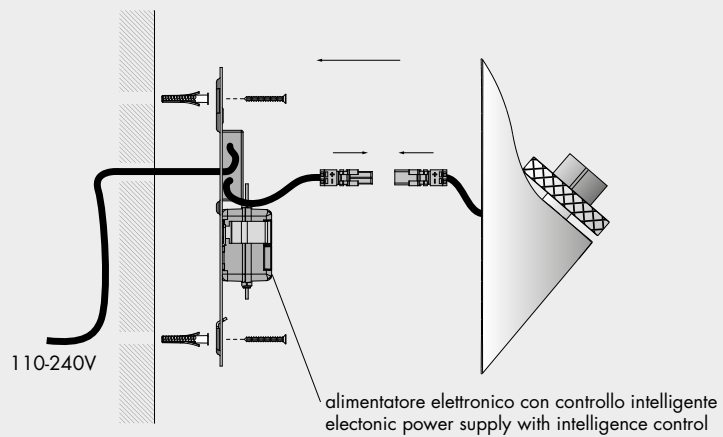




montaggio propulsore su n55 p.s.
propeller mounting on n55 p.s.


1. innestare il propulsore sull'interfaccia
engage the propeller on the interface

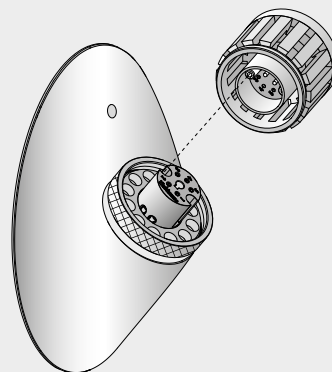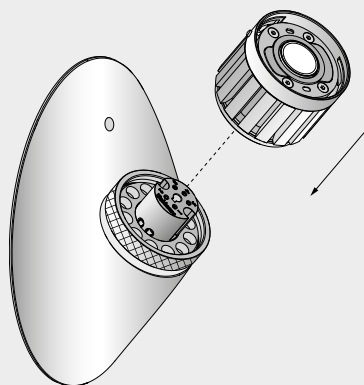


2. serrare la ghiera per assicurare il fissaggio
tighten the lock nut to secure the set

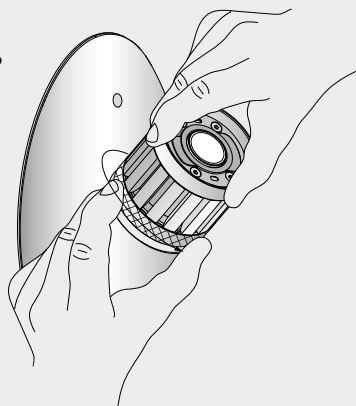


montaggio vetro su propulsore
glass mounting on propeller

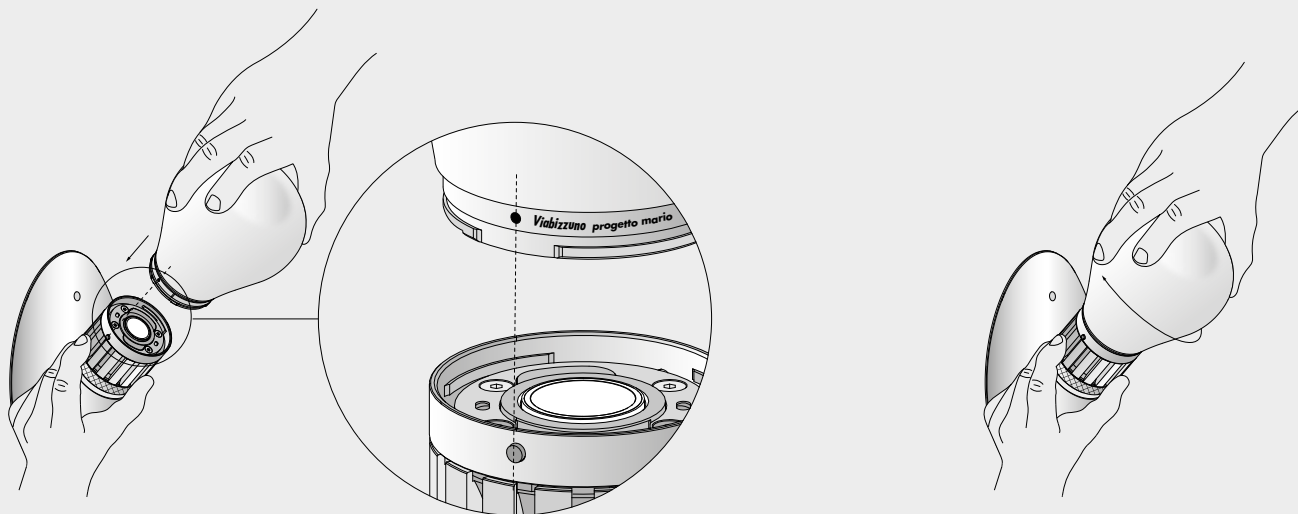

smontaggio vetro dal propulsore
removing glass from the propeller

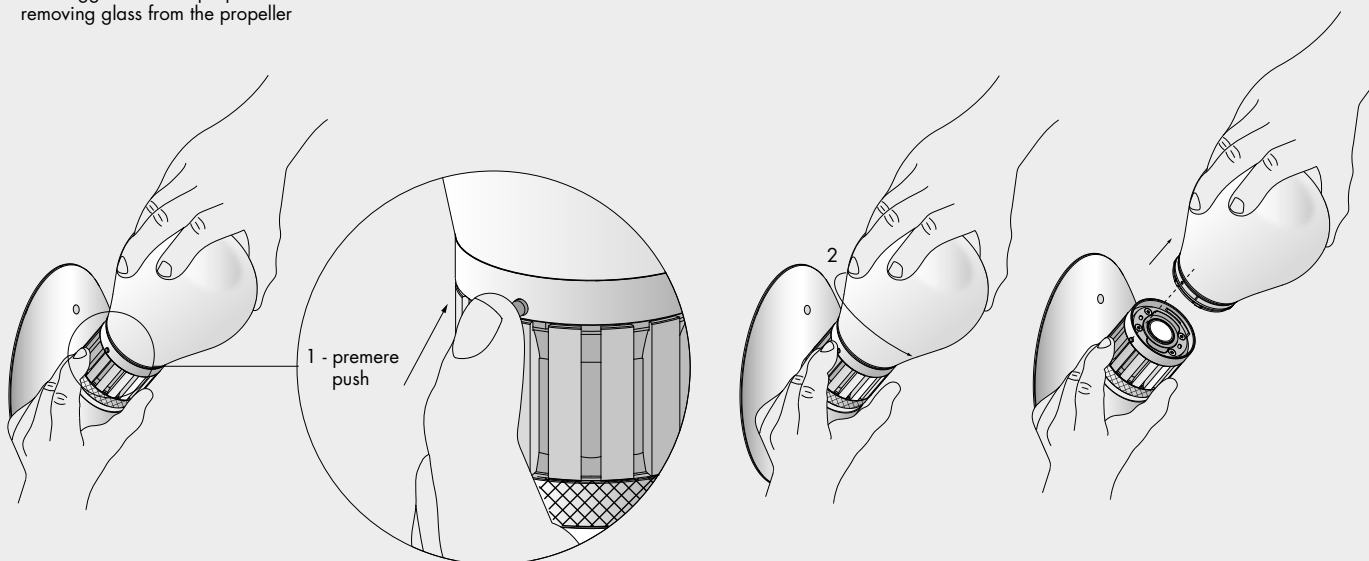

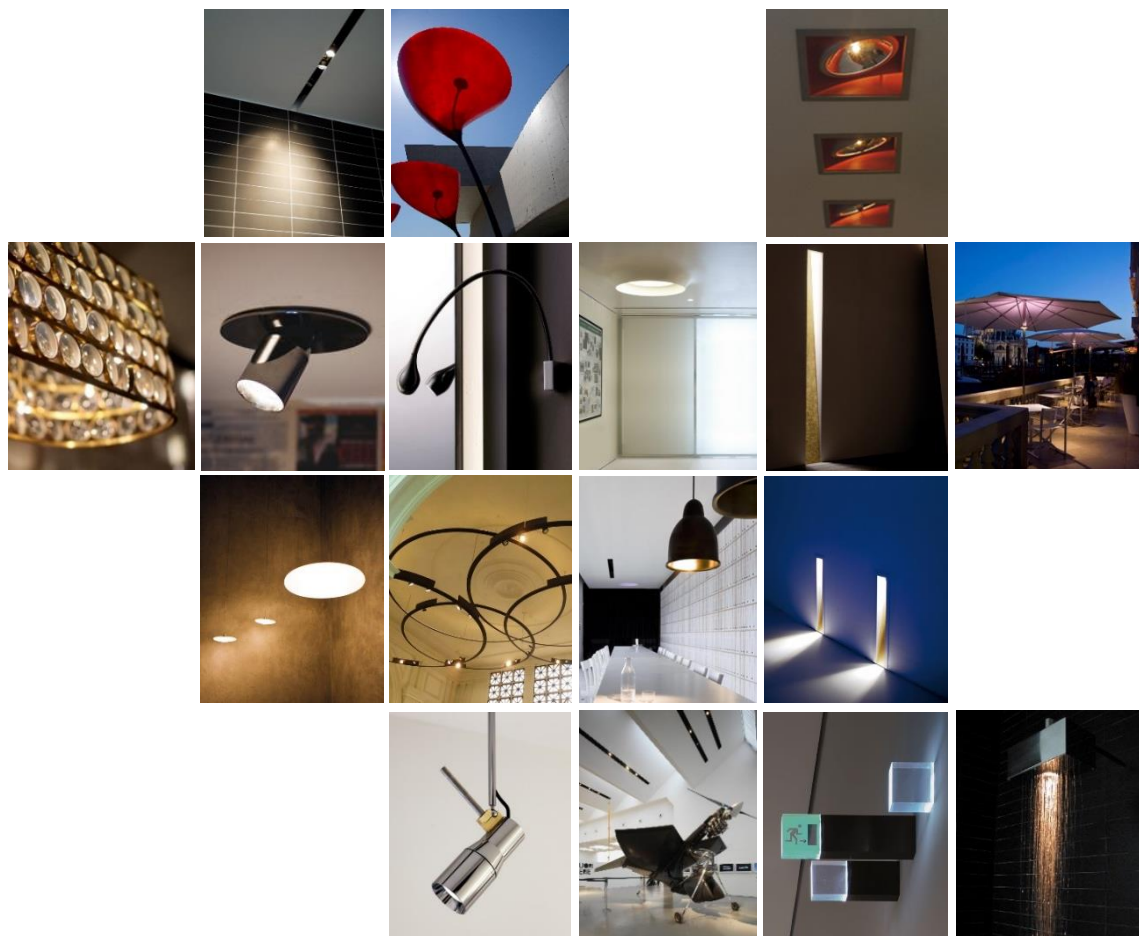

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

