




lampada quadra " ...l'ho voluta di forma quadrata, perfetta. " ag fronzoni 1962

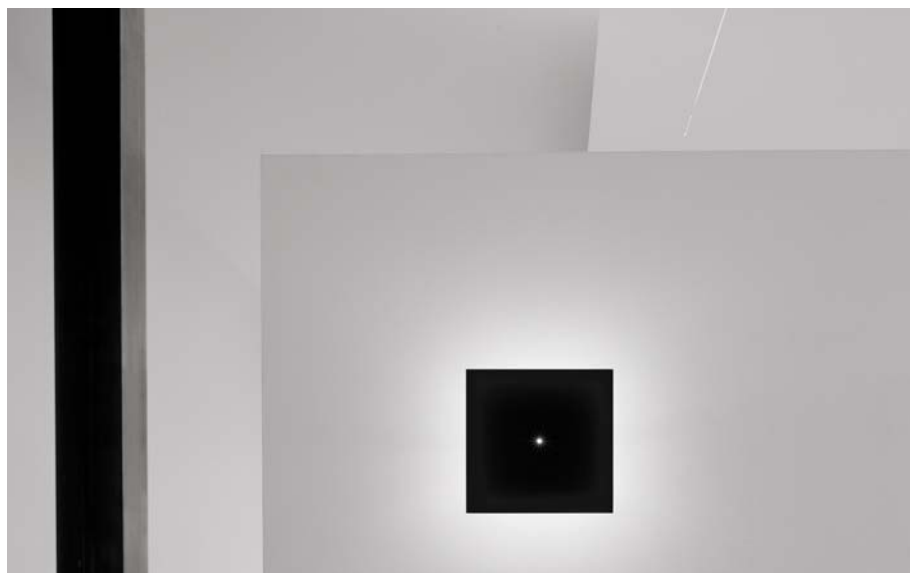

**apparecchio di illuminazione a parete o soffitto per interni IP20.
costituito da schermo in acciaio 220x220mm e struttura di supporto 120mm.
cablato con sorgente elettronica 2700K Ra95 12W 925lm o 3000K Ra95 12W 1046lm,
emette luce diffusa indiretta e crea un punto di luce sulla parte a vista grazie ad un
microforo quadrato centrale.
alimentatore 120-240V 50-60Hz a corrente costante escluso, da installare remoto.
finiture: my bianco, nero55, inox lucido.**


**IP20 rated wall or ceiling light fitting for indoor use.
consisting of a 220x220mm steel shield and 120mm support.
wired with 2700K 12W 925lm or 3000K Ra95 12W 1046lm led source, it emits diffuse
indirect light and creates a spot light on the exposed part thanks to a central square
microhole.
120-240V 50-60Hz constant current power supply not included, to be installed remotely.
finishes: my bianco, nero55, polished stainless steel.**

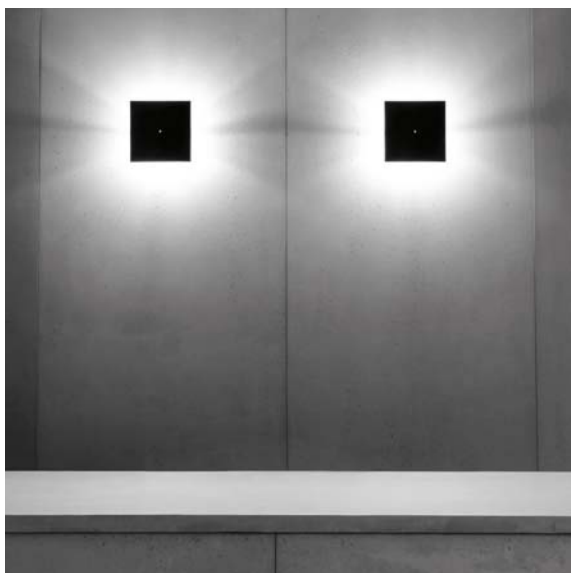

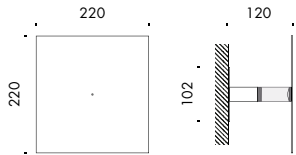



lampada quadra  **IP20**  **CE** 



- Vb6.115.01.27** my bianco 2700K 1,5
- Vb6.115.02.27** nero55 2700K 1,5
- Vb6.115.03.27** inox lucido · polished stainless steel 2700K 1,5

Ra	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	34	925	12,0	77	A+
ce010	les9 ●	Ta25 °C		vita media · average life		50000 h	L70	B10	

- Vb6.115.01.30** my bianco 3000K 1,5
- Vb6.115.02.30** nero55 3000K 1,5
- Vb6.115.03.30** inox lucido · polished stainless steel 3000K 1,5


Ra	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	34,1	1046	12,0	87	A+
ce011	les9 ●	Ta25 °C		vita media · average life		50000 h	L70	B10	




alimentatori. power supplies. 120-240V 50-60Hz  **IP20** **CE** 

- t4.382** 16,8W 350mA 0,2

installazione con alimentatore remoto · installation with remote power supply

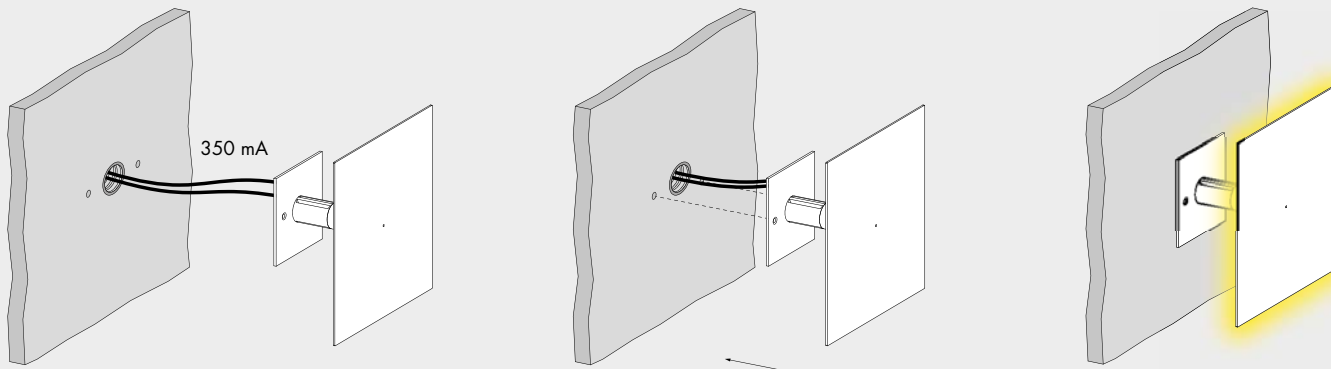



installazione con scatola incasso 3 moduli · installation with 3 modules recessed box

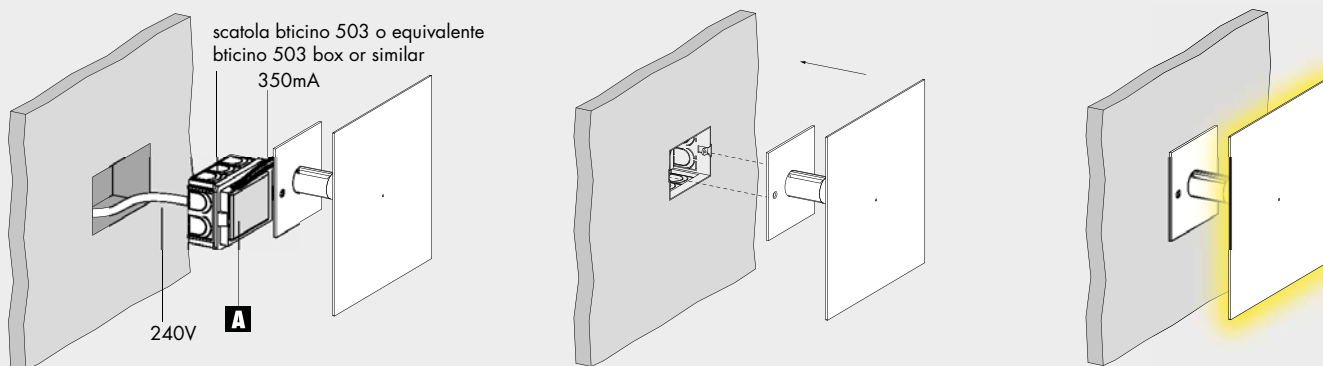

A t4.382

installazione con scatola modello usa/canada · installation with usa/canada outlet box

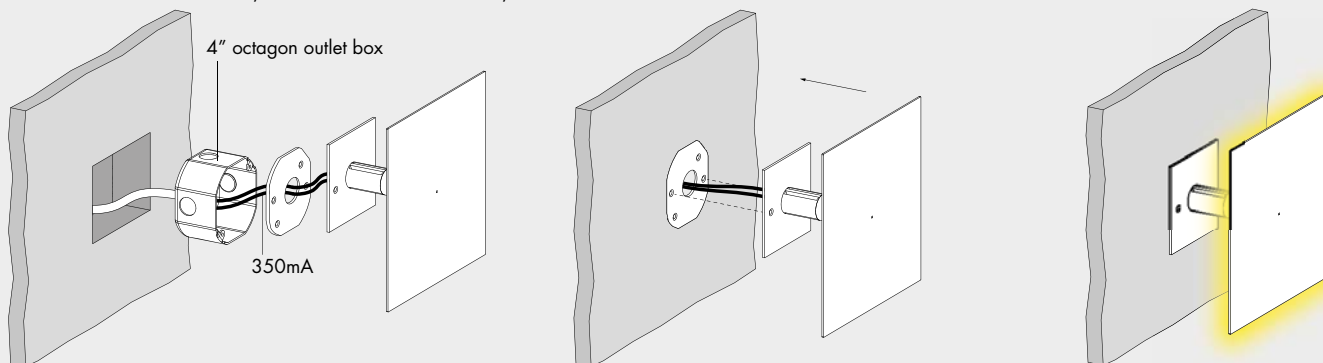

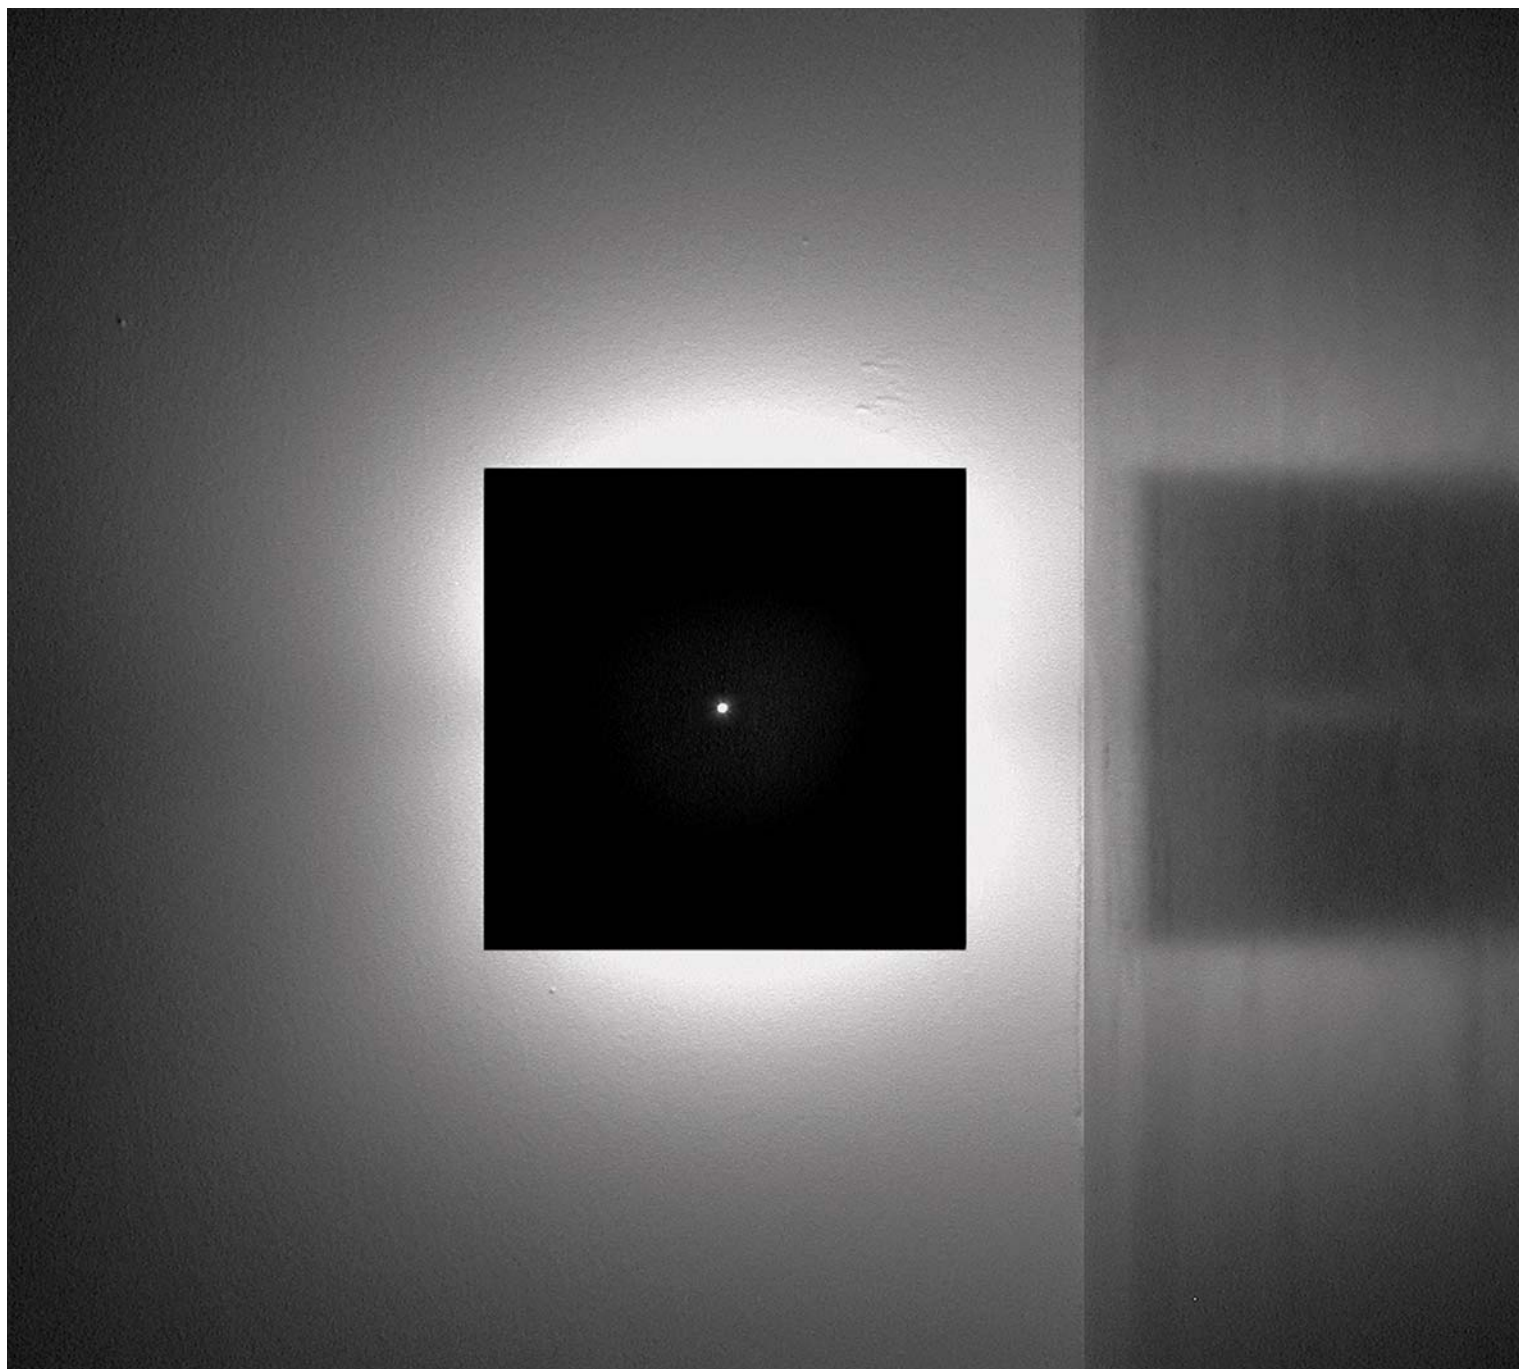



Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

