




corpo illuminante a sospensione per interni IP20, realizzato in estruso di alluminio di dimensioni 30x32mm calandrato con luce interna e ossidato. dimensioni: Ø1060mm, Ø2060mm completo di diffusore in policarbonato satinato. cablato con sorgente led lineare da 2700K e 3000K fino a 87W e 168W 24Vdc. disponibile nr.2 cavi sospensione in acciaio inox l.3000mm e nr. 1 cavo di alimentazione 2x0,75mm nella versione 1060mm, e nr.4 cavi sospensione in acciaio inox l.3000mm e nr. 2 cavi di alimentazione 2x0,75mm nella versione 2060mm. alimentatore escluso.
finiture: argento hacca, ottone AP-S e marrone mn.

IP20-rated suspension light fitting for indoor use, made of oxidised extruded aluminium measuring 30x32mm, calendered with internal light. size: Ø1060mm, Ø2060mm equipped with satin polycarbonate diffuser. wired with 2700K and 3000K linear led source up to 87W and 168W 24Vdc. available with 2 suspension cables made of stainless steel and 3000 mm long and 1 power cable 2x0,75mm for the 1060 mm version, and 4 suspension cables made of stainless steel and 3000mm long and 2 power cables 2x0,75mm for the 2060mm version. power supply unit not included.
finish: argento hacca, ottone AP-S and marrone mn.



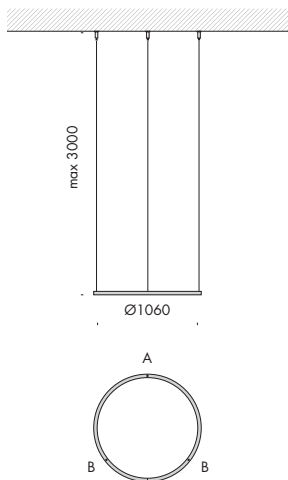

c2 anelli 24Vdc IP20

Vb8.616.01.27	argento hacca	led 2700K	87W	Ø1060
Vb8.616.02.27	ottone AP-S	led 2700K	87W	Ø1060
Vb8.616.03.27	marrone mn	led 2700K	87W	Ø1060
Vb8.616.01.30	argento hacca	led 3000K	87W	Ø1060
Vb8.616.02.30	ottone AP-S	led 3000K	87W	Ø1060
Vb8.616.03.30	marrone mn	led 3000K	87W	Ø1060



A: 2 cavi di sospensione in acciaio inox
2 stainless steel suspension cables


B: 1 cavo di alimentazione 2x0,75mm² trasparente
1 power cable 2x0,75mm² trasparent

Ra	selezione macadam macadam selection	lm/m	W/m	lm/W	classe energetica energy class
95	step 2	8360	87	96	A+

vita media/average life 50000 h Ta 25°C/L80 - B10

esempio di illuminazione
example of lighting

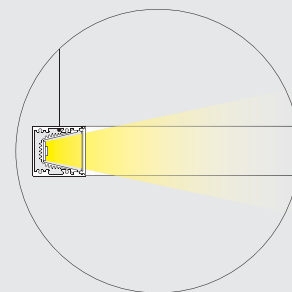

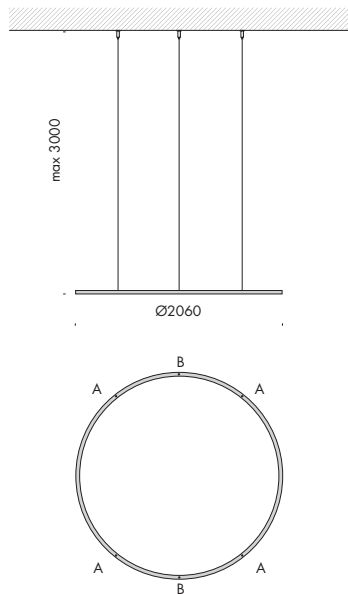

c2 anelli	24Vdc			IP20		
Vb8.616.11.27	argento hacca	led 2700K	168W	Ø2060		
Vb8.616.12.27	ottone AP-S	led 2700K	168W	Ø2060		
Vb8.616.13.27	marrone mn	led 2700K	168W	Ø2060		
Vb8.616.11.30	argento hacca	led 3000K	168W	Ø2060		
Vb8.616.12.30	ottone AP-S	led 3000K	168W	Ø2060		
Vb8.616.13.30	marrone mn	led 3000K	168W	Ø2060		

A: 4 cavi di sospensione in acciaio inox
4 stainless steel suspension cables

B: 2 cavi di alimentazione 2x0,75mm² trasparente
2 power cables 2x0,75mm² trasparente


Ra	selezione macadam macadam selection	lm/m	W/m	lm/W	classe energetica energy class
95	step 2	16150	168	96	A+

vita media/average life 50000 h Ta 25°C/L80 - B10



componenti. components.



Vb9.550.50 supporto bloccacavo plafone
ceiling support cable locks





Vb9.550.51 supporto bloccacavo laterizio/cartongesso scomparsa totale
total recessed brick/plasterboard support cable locks


è necessario usarne solo uno per ogni corpo illuminante
is necessary only use one for each lighting fixture

esempio d'installazione con supporto bloccacavo plafone
installation example with ceiling support cable locks

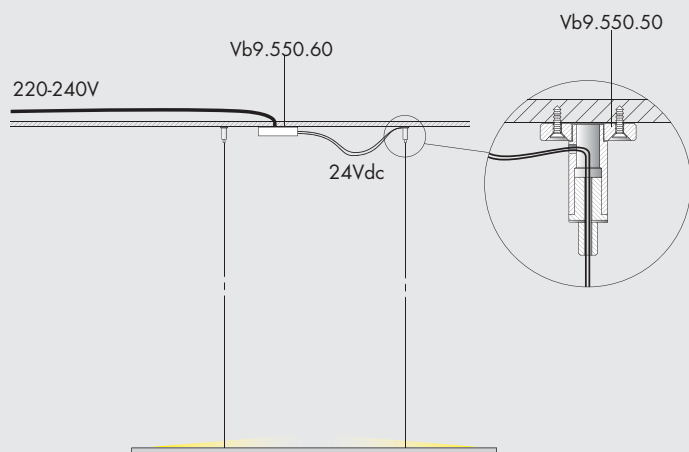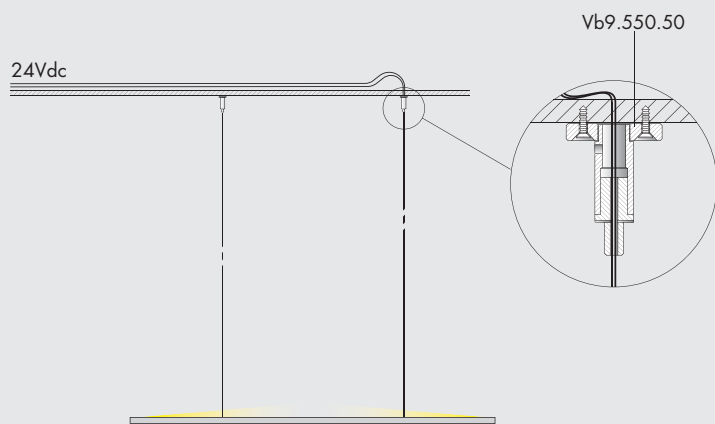

esempio d'installazione con supporto bloccacavo laterizio/cartongesso
installation example with total recessed brick/plasterboard support cable locks

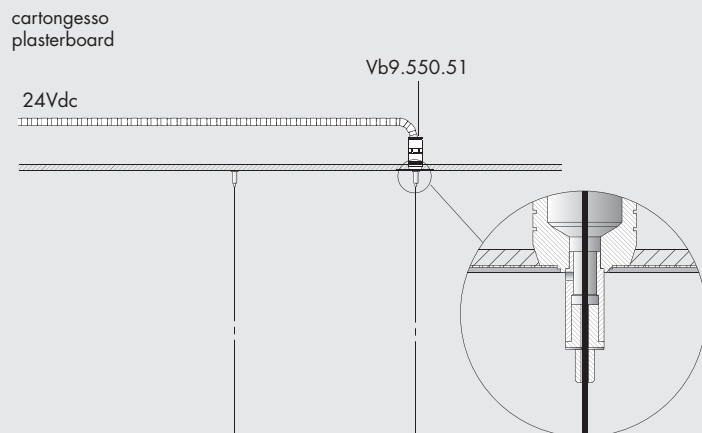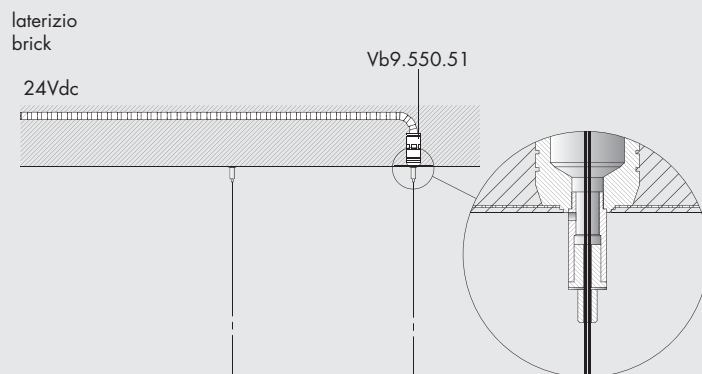

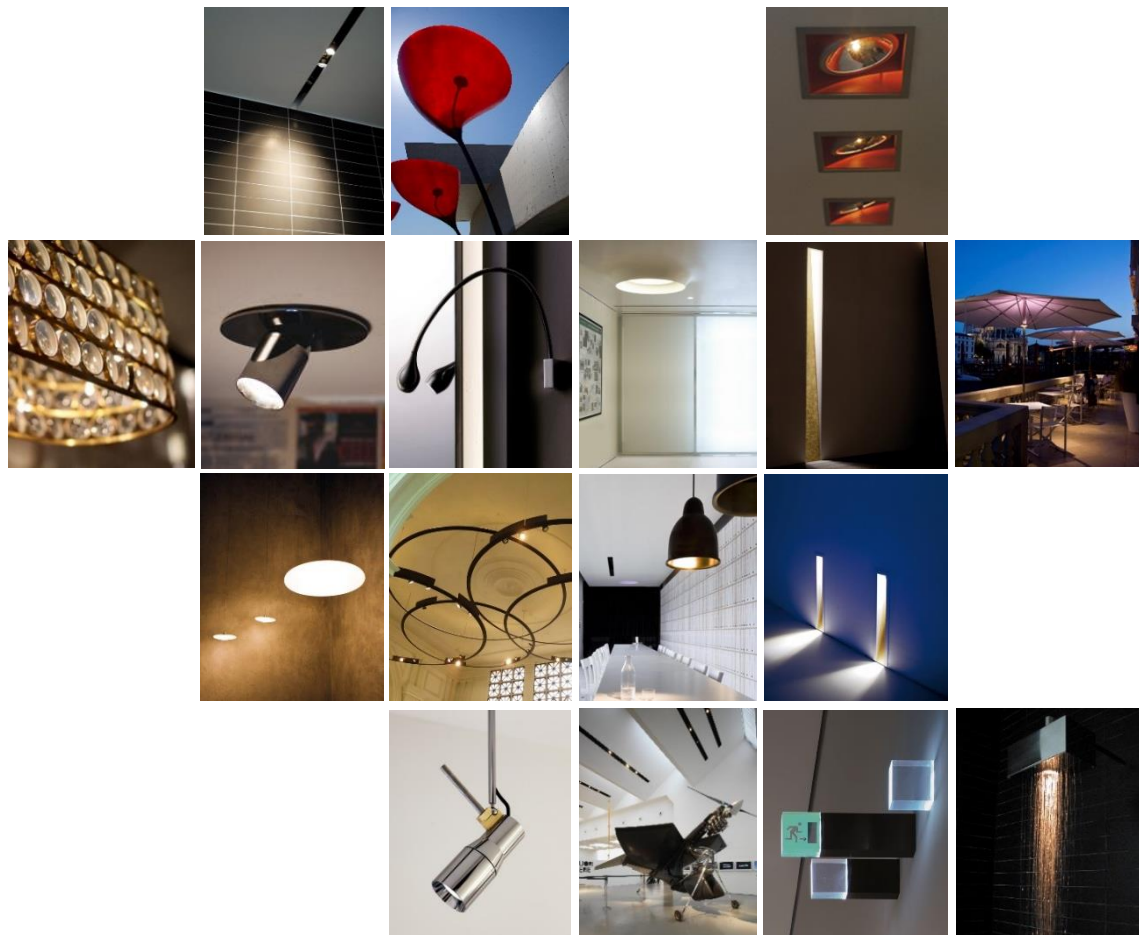

**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

