



apparecchio di illuminazione a parete per interni IP20. realizzato in estruso di alluminio ossidato di sezione 48x30mm.

modelli:

*c2 rotante 1440mm 36,4W
3495lm.*

*c2 rotante 1740mm 44,2W
4244lm.*

*c2 rotante 2040mm 52W 4992lm.
cablato con sorgente elettronica
lineare con limitatore di corrente
integrato 3000K Ra95 26W/m.
alimentatore 120-240V 50-60Hz
incluso.*

*componenti: supporto terminale
per alimentazione, supporto
terminale cieco, supporto centrale
per alimentazione.*

finiture: argento opaco.

IP20 rated wall light fitting for indoor use.

made of oxidised extruded aluminium having a 48x30mm section.

versions:

c2 rotante 1440mm 36.4W
3495lm.


c2 rotante 1740mm 44.2W
4244lm.

c2 rotante 2040mm 52W 4992lm.
wired with a linear led source
and an integrated 3000K Ra95
26W/m current limiter.

120-240V 50-60Hz power supply
included.

elements: terminal support for
power supply, blind terminal
support, central support for power
supply.

finishes: matt silver.

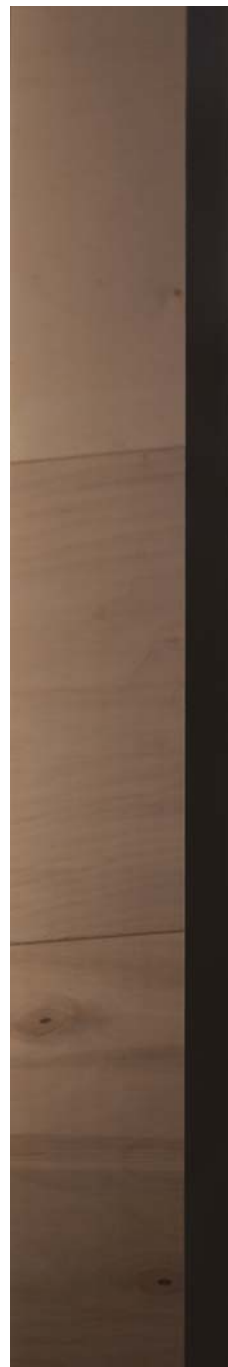







c2 rotante 120-240V 50-60Hz **A** IP20 **CE** **i**

- Vb6.133.01** argento opaco · silver matt 3000K 36,4W 1440mm 1,65
- Vb6.133.03** argento opaco · silver matt 3000K 44,2W 1740mm 1,98
- Vb6.133.05** argento opaco · silver matt 3000K 52W 2040mm 2,45

| | | | | | | | | | |
|-------|----|-----------|---------|--------|-----------------------------------|------|-----|------|-----------|
| Ra | R9 | ies tm-30 | | sdcM | V _f | lm/m | W/m | lm/W | |
| 95 | 90 | Rf 93 | Rg 102 | step 2 | 24 | 2500 | 26 | 96 | A+ |
| V3001 | 11 | | Ta25 °C | | vita media · average life 50000 h | | L80 | B10 | |


componenti. components. **i**

- Vb9.133.91** supporto terminale per alimentazione electrified end support 0,5
- Vb9.133.93** supporto terminale cieco · blind end support 0,5
- Vb9.133.95** supporto centrale per alimentazione electrified central support 0,6

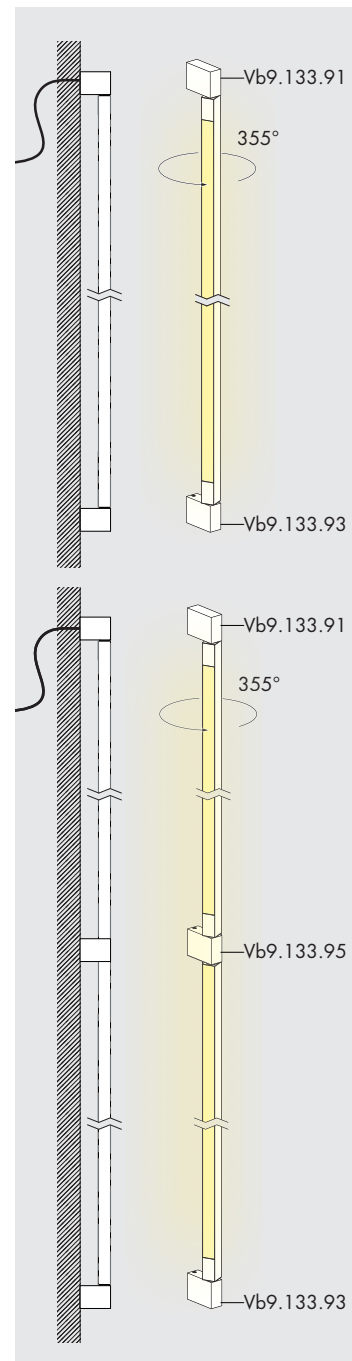






c2 rotante 1440mm

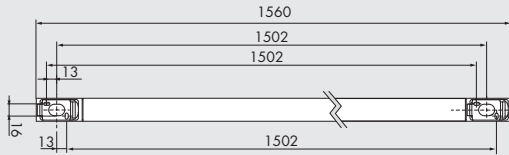

c2 rotante 1749mm

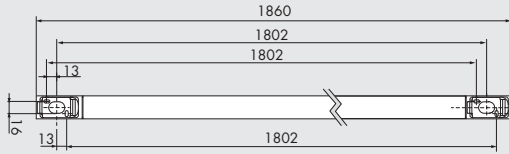

c2 rotante 2040mm

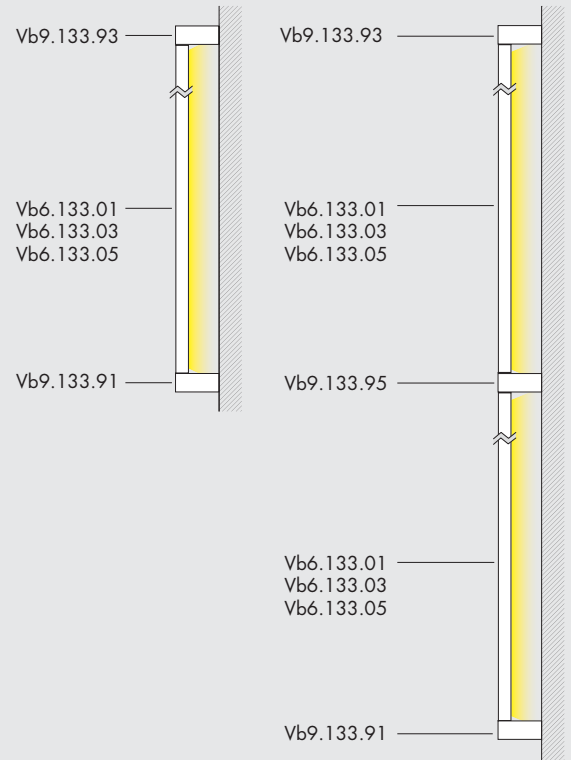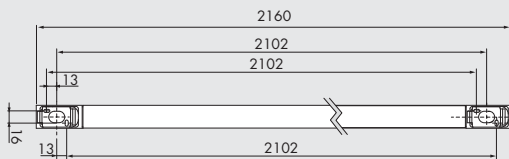



Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

