

# peled soffitto antoni arola 2008



**apparecchio di illuminazione a soffitto per interni IP20. realizzato con aste in estruso di alluminio diametro Ø14mm 1200mm collegate a piastra di supporto in acciaio 170x170x4mm con uno snodo sferico che permette una inclinazione fino a 30° rispetto all'asse verticale.**

**modelli:**

**peled soffitto con 1 asta,  
peled soffitto con 4 aste,  
peled soffitto con 8 aste,  
peled soffitto con 16 aste.**

**cablato con sorgente elettronica  
3000K Ra98 1W.**

**alimentatore 240V 50-60Hz  
incluso.**

**accessori: giunto, piastra frontale  
per 1, 4, 8 e 16 aste.**

**finiture: piastra in inox lucido,  
nero lucido e bianco V, aste in  
alluminio verniciato nero lucido,  
bianco V e argento antico.**

**personalizza la tua luce vai su**



**IP20 rated ceiling light fitting for indoor use. made of extruded aluminium rods with a diameter Ø14 mm 1200mm connected to a 170x170x4mm steel support plate with a spherical joint that allows an inclination up to 30° on the vertical axis.**

**versions:**

**peled soffitto with 1 rod,  
peled soffitto with 4 rods,  
peled soffitto with 8 rods,  
peled soffitto with 16 rods.**

**wired with 3000K Ra98 1W led  
source.**


**240V 50-60Hz power supply  
included.**

**accessories: joint, front plate for 1,  
4, 8 and 16 rods.**

**finishes: bianco V, polished black  
and polished stainless steel  
plate, aluminium rods painted  
in polished black, bianco V and  
antique silver.**

**customize your light visit**



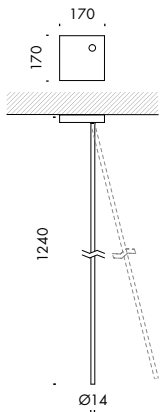


**peled soffitto 1** 120-240V 50-60Hz IP20 CE

**Via.128.0001** bianco V 3000K 1,3

**Via.128.0002** nero lucido · polished black 3000K 1,3

Ra	ies tm-30		sdcn	mA	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	3,0	79	1	79	<b>A++</b>
ca041	les2	Ta25 °C	vita media · average life		50000 h	L80	B10		

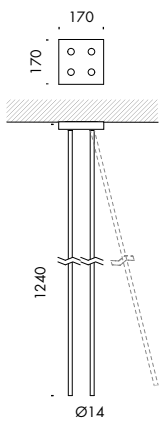


**peled soffitto 4** 120-240V 50-60Hz IP20 CE

**Via.128.0003** bianco V 3000K 4x1W 1,5

**Via.128.0004** nero lucido · polished black 3000K 4x1W 1,5

Ra	ies tm-30		sdcn	mA	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	12,0	316	4	79	<b>A++</b>
ca041-4	les2	Ta25 °C	vita media · average life		50000 h	L80	B10		



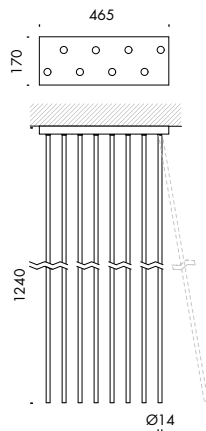


**peled soffitto 8** 120-240V 50-60Hz IP20

**Via.128.0005** bianco V 3000K 8x1W 4,3

**Via.128.0006** nero lucido · polished black 3000K 8x1W 4,3

Ra	ies tm-30		sdc	mA	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	24,0	632	8	79	<b>A++</b>
ca041-8	les2	Ta25 °C	vita media · average life		50000 h	L80	B10		

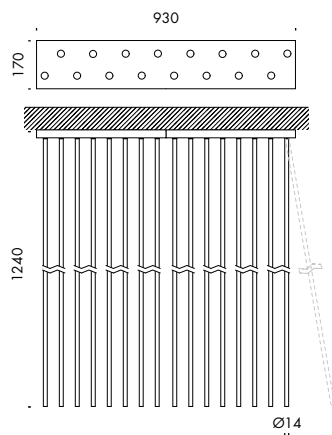


**peled soffitto 16** 120-240V 50-60Hz IP20

**Via.128.0007** bianco V 3000K 16x1W 15

**Via.128.0008** nero lucido · polished black 3000K 16x1W 15

Ra	ies tm-30		sdc	mA	V <sub>f (min)</sub>	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	24,0	1264	16	79	<b>A++</b>
ca041-16	les2	Ta25 °C	vita media · average life		50000 h	L80	B10		



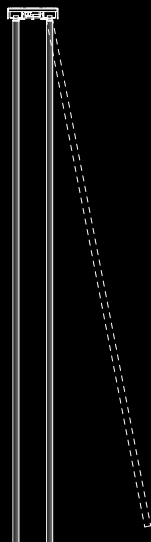

+




**1. scegli il modulo delle aste**  
choose the rod module

**2. scegli la piastra di supporto**  
choose the support plate





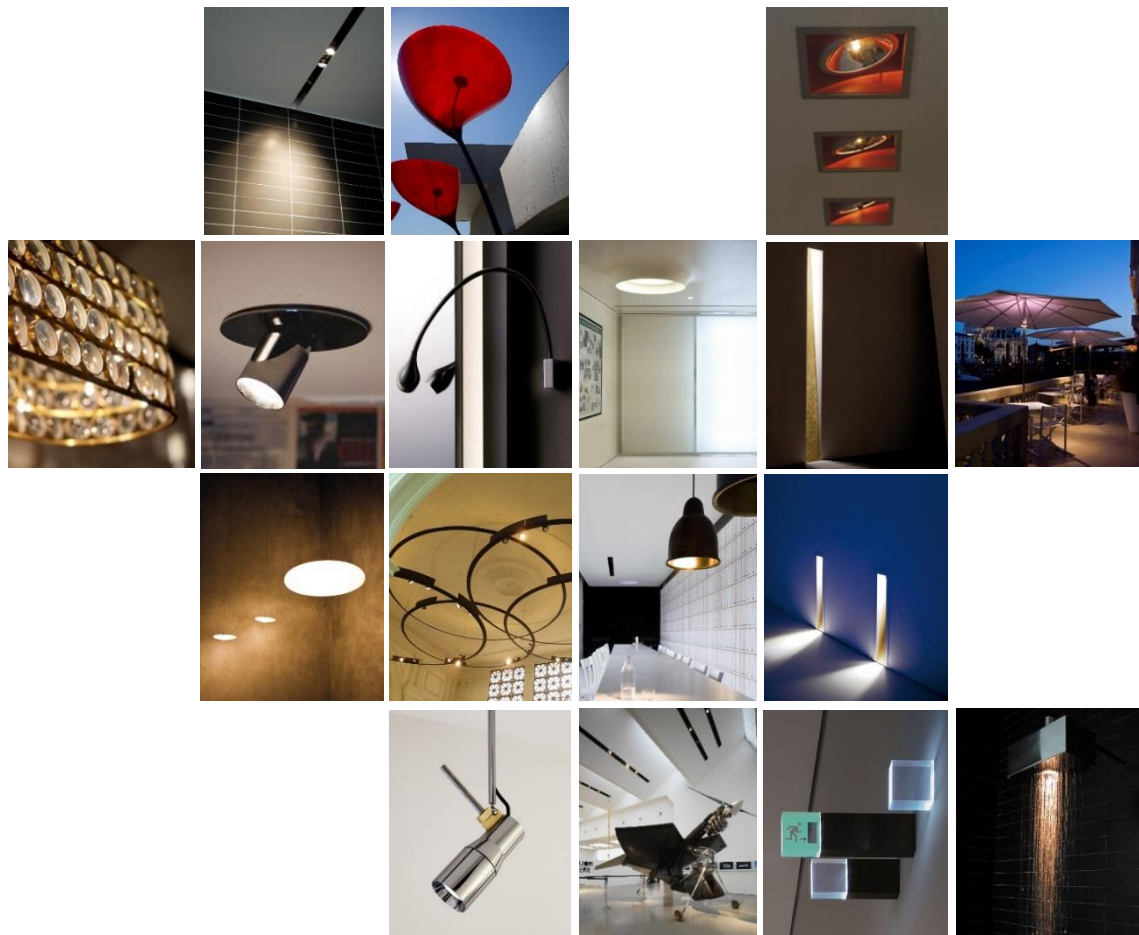

Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

