



**apparecchio di illuminazione e dissuasore per esterni IP67.
realizzato in cemento.**

modelli:

concrete 2 uplighter 540x300x240mm.

concrete 3 downlighter 1000x300x240mm, con funzione porta bicicletta.

concrete 4 downlighter 540x300x240mm.

kit uplighter diametro Ø170mm h.120mm cablato con sorgente elettronica 3000K 21W.

kit downlighter diametro Ø170mm h.162mm cablato con sorgente elettronica 3000K 22,3W.

ottiche: diffusa, 18°, 36°, 73°.

alimentatore 120-240V 50-60Hz incluso.

accessori: piastra tirafondi.

finiture: cemento.

IP55 rated light fitting and bollard for outdoor use.

made of concrete.

concrete 2 uplighter 540x300x240mm.

concrete 3 downlighter 1000x300x240mm, with bike carrier.

concrete 4 downlighter 540x300x240mm.

kit led uplighter diametro Ø170mm h.120mm wired with 3000K 21W led source.

kit led downlighter diametro Ø170mm h.162mm wired with 3000K 22,3W led source.


optics: diffused, 18°, 36°, 73°.

120-240V 50-60Hz power supply included.

accessories: ground plate.

finishes: concrete.



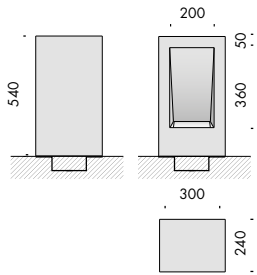


concrete 2



★ CE i

Vb4.140.02 uplighter

78,3

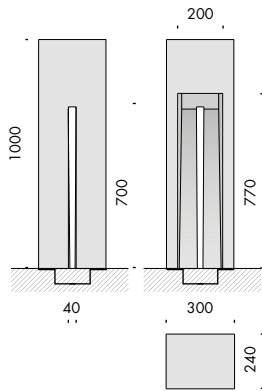


concrete 3



★ CE i

Vb4.140.03 downlighter

121

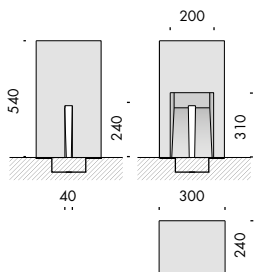


concrete 4





★ CE i

Vb4.140.04 downlighter

61,6

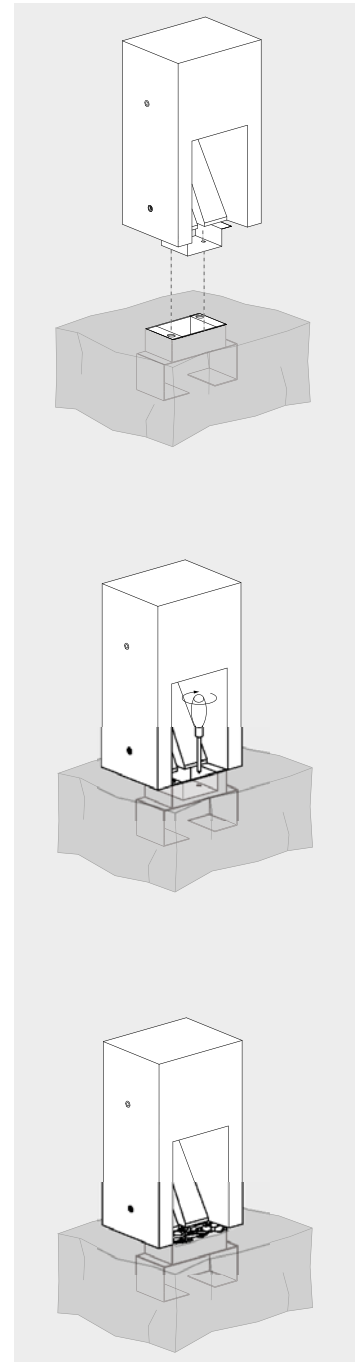



kit uplighter 120-240V 50-60Hz IK08 A K ⊕ IP67 △ CE i

Vb6.615.10.30 corpo nero - borchia alluminio lucido 3000K 0,8
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 3	600	34,5	2040	21	97	A+
ty021	Ta25 °C vita media · average life					50000 h	L70	B10	

kit downlighter 120-240V 50-60Hz IK08 A K ⊕ IP67 △ CE i

Vb6.615.01.30 corpo nero - borchia alluminio lucido 3000K 18° 1,2
black body - polished bezel aluminium

Vb6.615.02.30 corpo nero - borchia alluminio lucido 3000K 36° 1,2
black body - polished bezel aluminium


Vb6.615.03.30 corpo nero - borchia alluminio lucido 3000K 73° 1,2
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	650	34,3	2798	22,3	125	A++
ci011	les14 ●	Ta25 °C vita media · average life					50000 h	L80	B10

componenti. components. CE i

f9.140.91 piastra tirafondi · ground plate 7,3



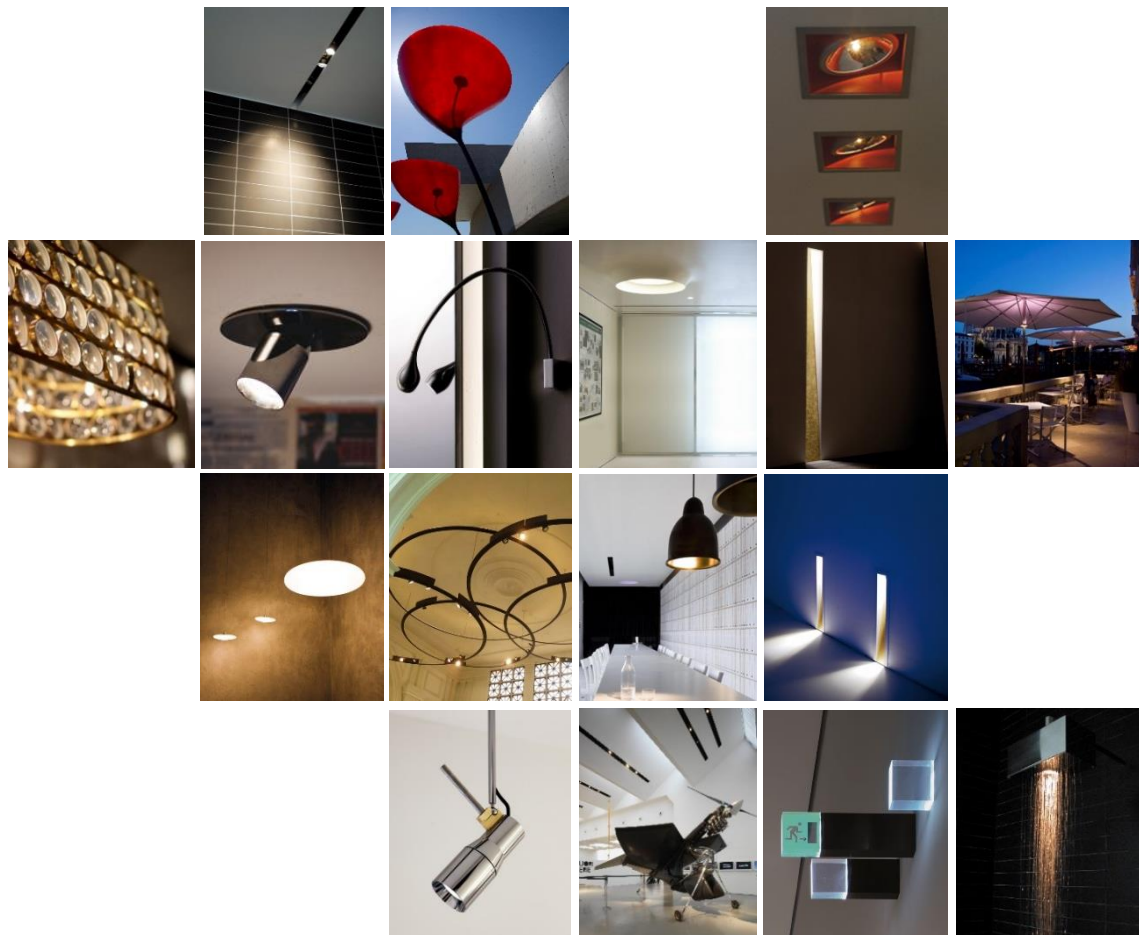

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

