

royal sospensione david chipperfield 2013



**apparecchio di illuminazione a sospensione per interni IP20.
realizzato in alluminio verniciato o in ottone ossidato.
costituito da corpo cilindrico strombato fissato a soffitto tramite tige 655mm e apposito
rosone, vetro cilindrico trasparente in pirex la cui chiusura è realizzata mediante l'utilizzo
di un cono in ottone riflettente.**

modelli:

royal soffitto 60 diametro Ø60mm h.890mm,

royal soffitto 80 diametro Ø80mm h.890mm,

royal soffitto 100 diametro Ø100mm h.890mm.

cablato con sorgente elettronica 3000K Ra98 fino a 19,9W 2140lm.

alimentatore in corrente costante escluso, da installare remoto.

**accessori: sistema di fissaggio a cartongesso, dischi riflettenti diametro Ø300mm, diametro
Ø400mm e diametro Ø500mm.**

finiture: my bianco, nero55 e copper bronze.

IP20 rated suspension light fitting for indoor use.

made of painted aluminium or oxidised brass.

**consisting of a splayed cylindrical body ceiling-mounted using a 655mm rod and a special
rose, transparent pyrex cylindrical glass closed by a reflecting brass cone.**

versions:

royal soffitto 60 diameter Ø60mm h.890mm,

royal soffitto 80 diameter Ø80mm h.890mm,

royal soffitto 100 diameter Ø100mm h890mm.


wired with 3000K Ra98 led source up to 19.9W 2140lm.

constant current power supply not included, to be installed remotely.

**accessories: kit for installation on plasterboard, diameter Ø300mm, diameter Ø400mm
and diameter Ø500mm reflector disks.**

finishes: nero55 and copper bronze.



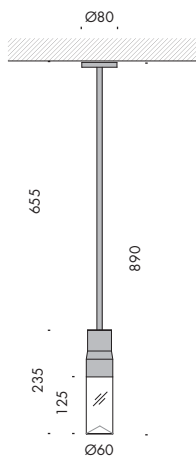

royal sospensione 60




IP20



Vb6.573.66	my bianco	trasparente · trasparente	3000K	2,1
Vb6.573.67	nero55	trasparente · trasparente	3000K	2,1
Vb6.573.68	copper bronze	trasparente · trasparente	3000K	2,1

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
xm001	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		

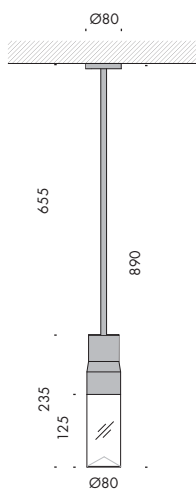

royal sospensione 80





IP20



Vb6.573.76	my bianco	trasparente · trasparente	3000K	2,4
Vb6.573.77	nero55	trasparente · trasparente	3000K	2,4
Vb6.573.78	copper bronze	trasparente · trasparente	3000K	2,4


Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
					500	27,9	1580	14,0	113	A+
xm001	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		

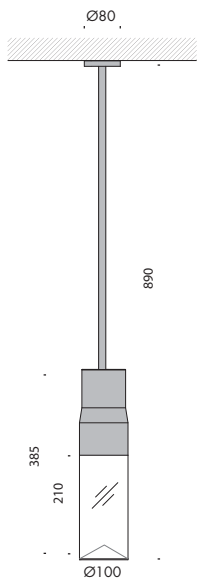


royal sospensione 100   IP20   CE 

Vb6.573.86	my bianco	trasparente · trasparente	3000K	3,8
Vb6.573.87	nero55	trasparente · trasparente	3000K	3,8
Vb6.573.88	copper bronze	trasparente · trasparente	3000K	3,8

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
					500	27,9	1580	14,0	113	A+
					700	28,4	2140	19,9	108	A+
xm001	les19 	Ta25 °C		vita media · average life	70000 h	L80	B10			

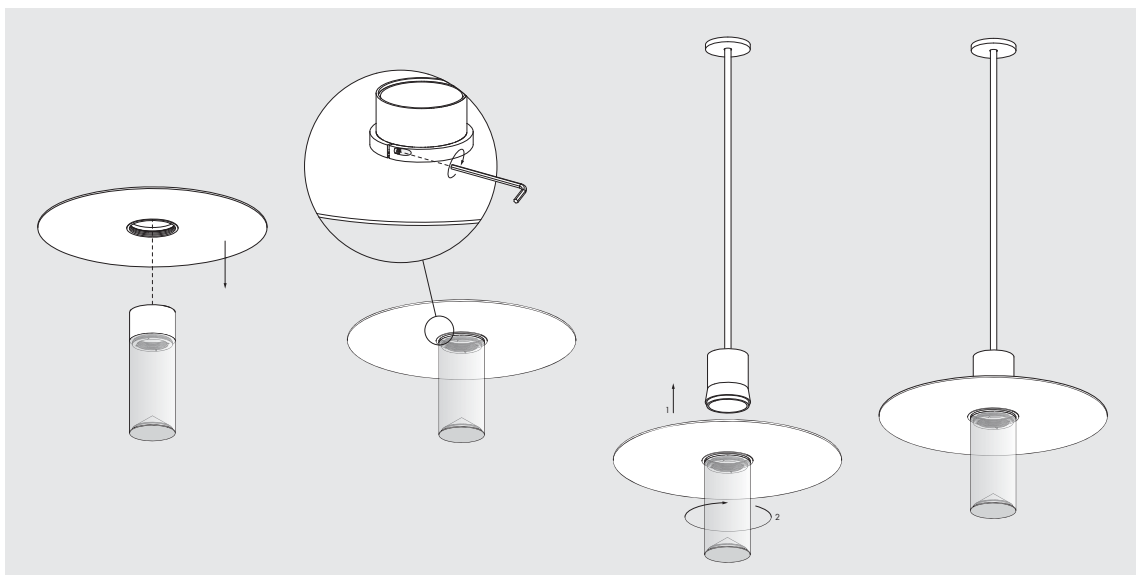


accessori. accessories.


a9.573.89 kit fissaggio cartongesso
plasterboard fixing kit 0,2

dischi. discs.


a9.573.91 my bianco Ø 60mm 1

a9.573.92 nero55 Ø 60mm 1

a9.573.93 copper bronze Ø 60mm 2

a9.573.94 my bianco Ø 80mm 1,5




a9.573.95 nero55 Ø 80mm 1,5


a9.573.96 copper bronze Ø 80mm 3,3

a9.573.97 my bianco Ø100mm 2

a9.573.98 nero55 Ø100mm 2

a9.573.99 copper bronze Ø100mm 4

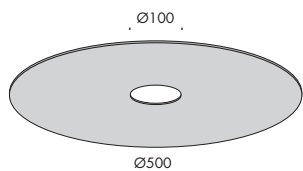

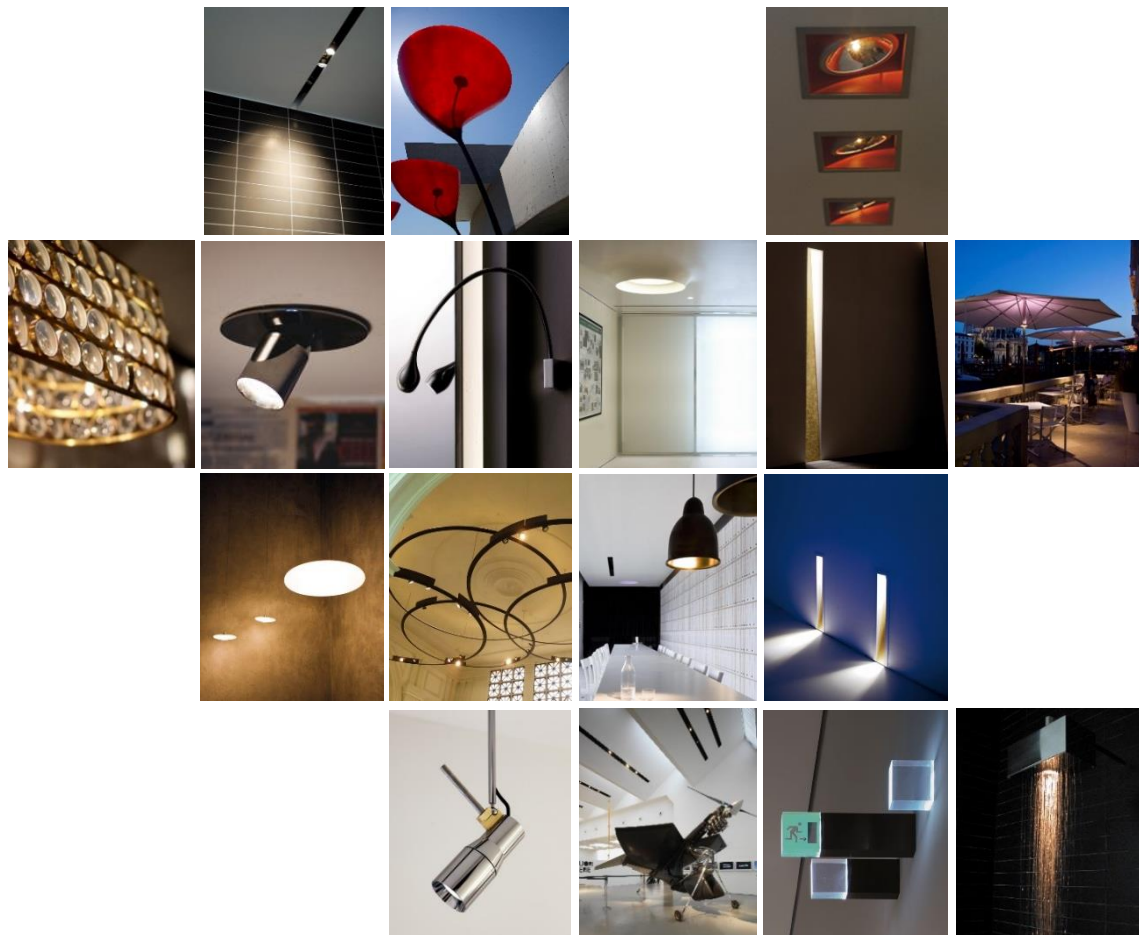

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

