



apparecchio di illuminazione a soffitto per interni IP20. realizzato con due profili in ottone calandrato di sezione 10x3mm che creano un binario elettrificato per alimentare le sorgenti elettroniche a luce diffusa, completo di diffusori diametro Ø60mm, in vetro sabbato e cristallo e cavo di sospensione in ottone 3000mm.

modelli:

sempre mia 1000mm 37,5W

3600lm,

sempre mia 2000mm 90W

8640lm,

sempre mia 3000mm 125W

12000lm.

cablato con sorgente elettronica 2700K Ra95.

alimentatore 240V 50-60Hz incluso, da installare remoto.

finiture: ottone naturale.

IP20 rated ceiling light fitting for indoor use.

made of two calendered brass profiles of a 10x3mm section which create an electrified track to power the diffuse light led sources, equipped with diameter Ø60mm sanded glass and crystal diffusers and 3000mm brass suspension cable.

versions:

sempre mia 1000mm 37,5W

3600lm,

sempre mia 2000mm 90W

8640lm,

sempre mia 3000mm 125W


12000lm.

wired with 2700K Ra95 led source.

240V 50-60Hz power supply included, to be installed remotely.

finishes: natural brass.



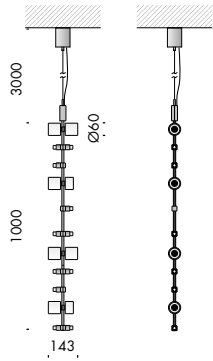

sempre mia 1000

240V 50-60Hz AR



IP20

CE

Via.582.0001 ottone naturale
natural brass

2700K 15x2,5W 1000mm 5

Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	Energy Class
95	90	Rf 93	Rg 102	step 2	24,0	3600	37,5	96	A++
Vy010-15	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

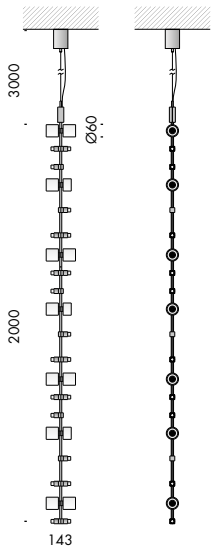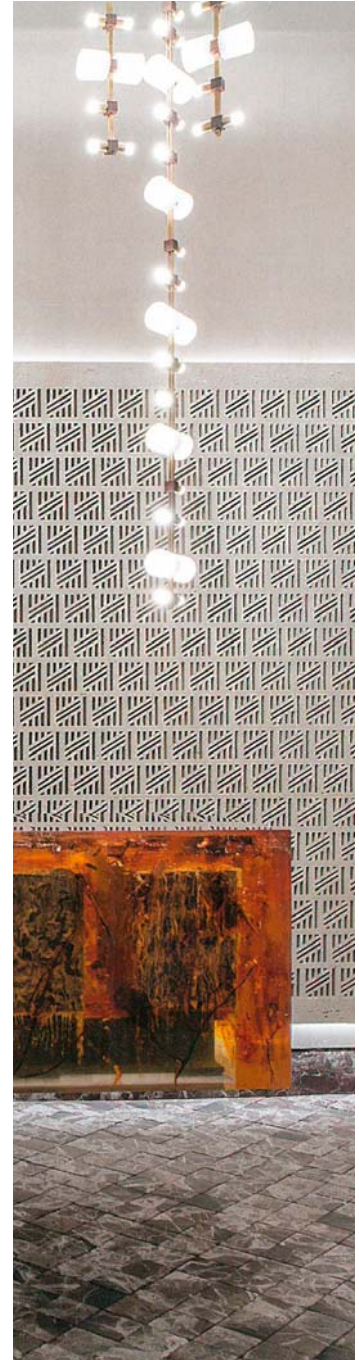

sempre mia 2000

240V 50-60Hz AR



IP20

CE

Via.582.0002 ottone naturale
natural brass

2700K 36x2,5W 2000mm 10

Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	Energy Class
95	90	Rf 93	Rg 102	step 2	24,0	8640	90	96	A++
Vy010-36	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

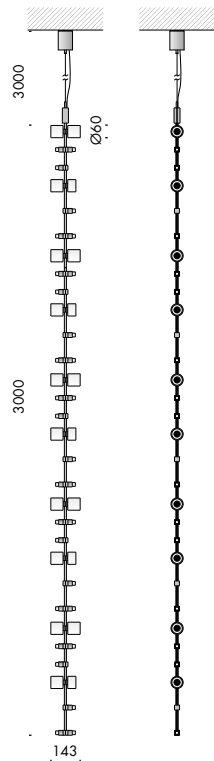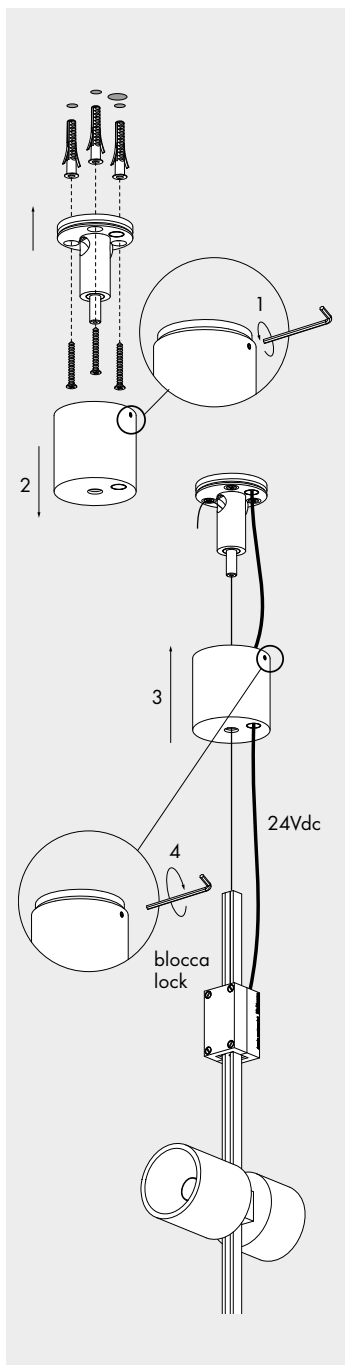


sempre mia 3000 240V 50-60Hz AR IP20

Via.582.0003 ottone naturale
natural brass

2700K 50x2,5W 3000mm 15

Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	12000	125	96	A++
Vy010:50		les16		Ta25 °C		vita media · average life		50000 h	L80 B10

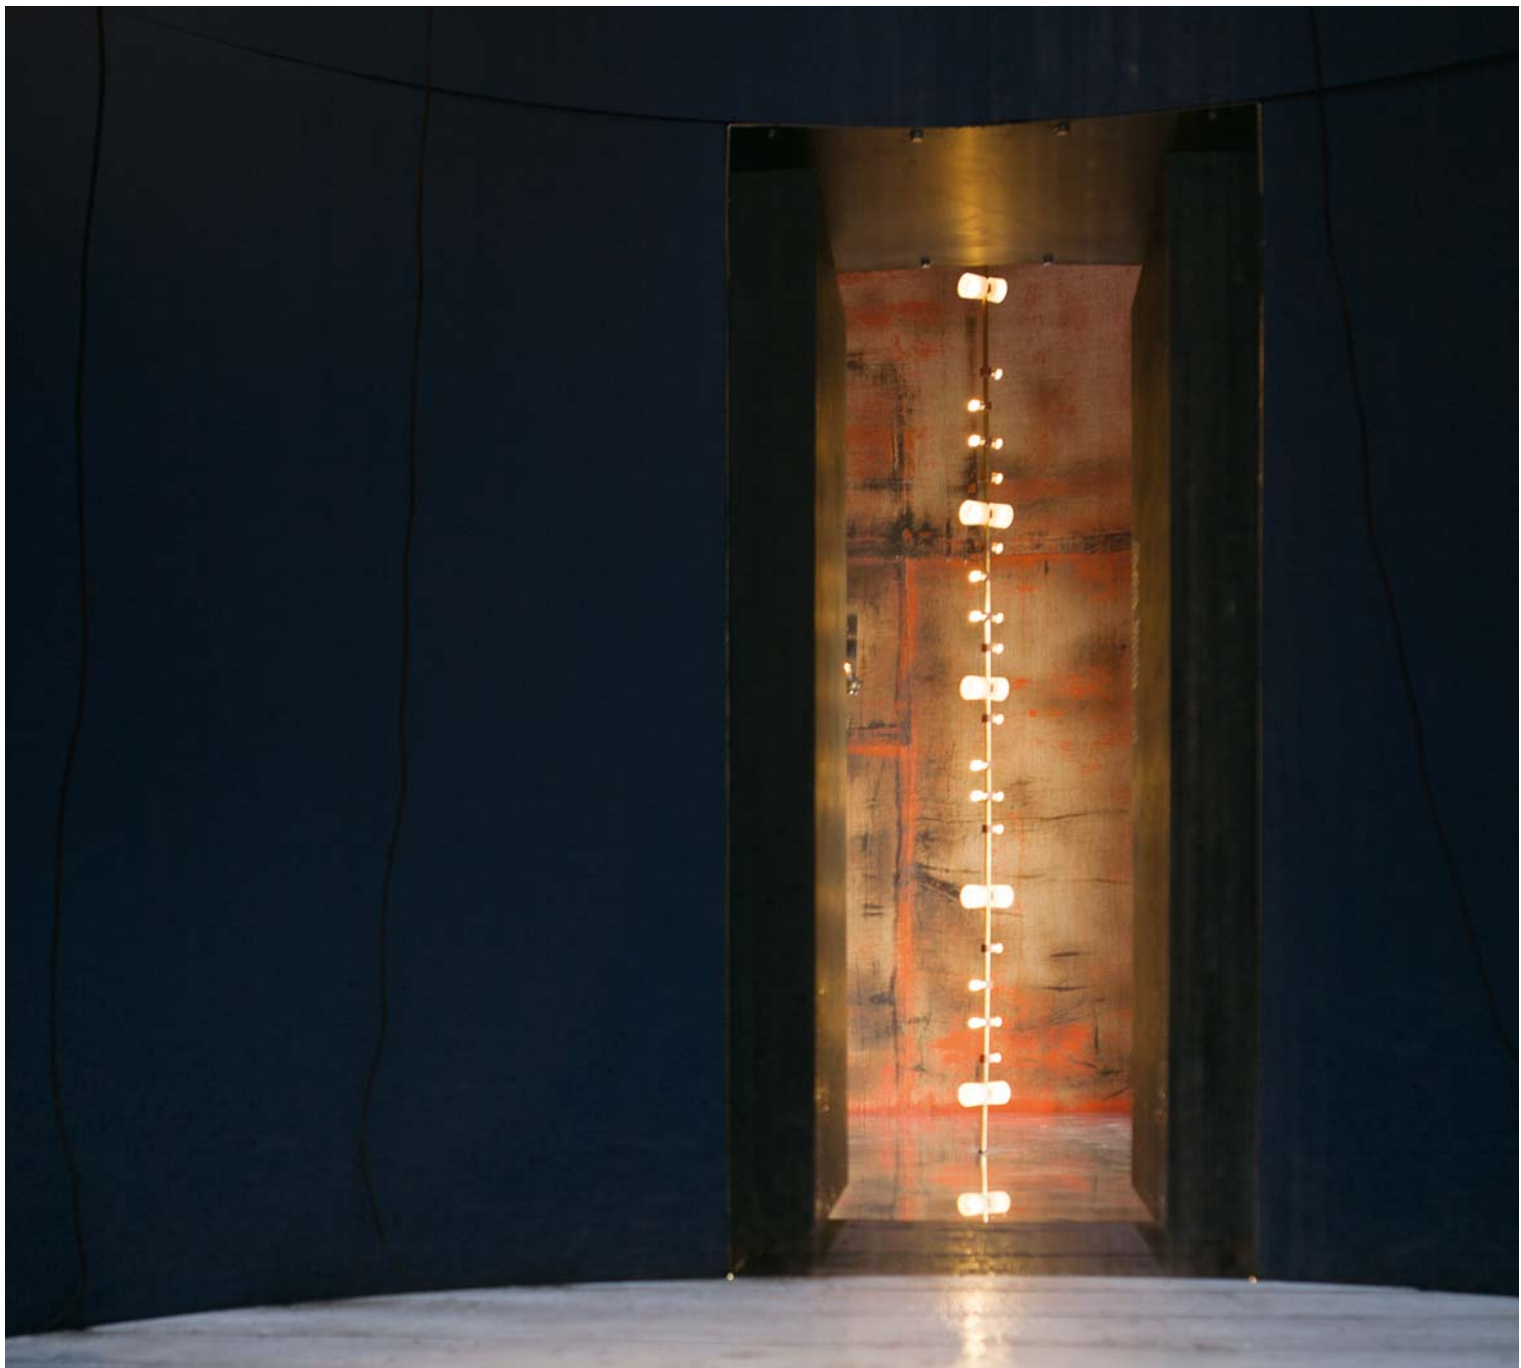



Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

