

square tube

aldo parisotto massimo formenton mario nanni 2003



apparecchio di illuminazione da terra o soffitto per esterni IP65. realizzato in alluminio estruso di sezione 50x50mm ossidato e verniciato a polvere, completo di aletta antiabbagliamento 25mm. modelli:

square tube 1000 h.1000mm con aletta antiabbagliamento 526mm cablato con sorgente elettronica Ra95 15,6W 1498lm.

square tube 1600 h.1600mm con aletta antiabbagliamento 1125mm cablato con sorgente elettronica Ra95 31,2W 2996lm.

square tube 1900 h.1900mm con aletta antiabbagliamento 1425mm cablato con sorgente elettronica Ra95 39W 3744lm. alimentatore 240V 50-60Hz incluso.

accessori: flangia per rotazione, picchetto per fissaggio a terra. finiture: bruno antico, nero notte, scurodivals, grigio argento.

IP65 rated floor-standing or ceiling light fitting for outdoor use. made of oxidised and powder coated extruded aluminium having a 50x50mm section, with a 25mm anti-glare louvre.

versions:

square tube 1000 h.1000mm with anti-glare louvre 526mm wired with Ra95 15.6W 1498lm led source.

square tube 1600 1600mm with anti-glare louvre h.1125mm wired with Ra95 31.2W 2996lm led source.


square tube 1900 h.1900mm with anti-glare louvre 1425mm wired with Ra95 39W 3744lm led source.

240V 50-60Hz power supply included.

accessories: rotation flang, ground fixing stake.

finish: antique brown, night black, scurodivals and silver grey.




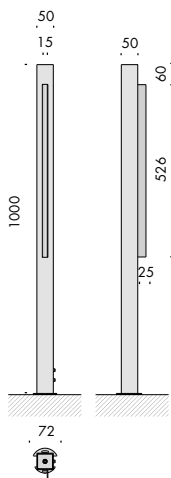

square tube 1000 240V 50-60Hz

- Vb4.127.02** bruno antico · antique brown 3000K 15,6W 2,4
- Vb4.127.04** nero notte · night black 3000K 15,6W 2,4
- Vb4.127.06** scurodivals 3000K 15,6W 2,4
- Vb4.127.08** grigio argento · silver grey 3000K 15,6W 2,4


Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9	Ta25 °C		vita media · average life		50000 h	L80 B10		


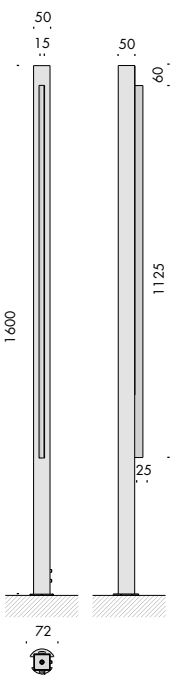






square tube 1600 240V 50-60Hz

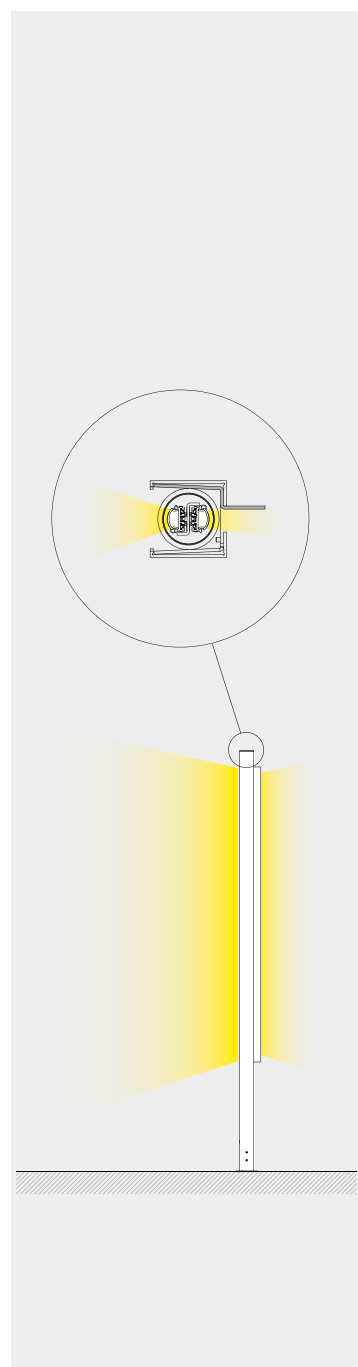- Vb4.127.12** bruno antico · antique brown 3000K 31,2W 3,7
- Vb4.127.14** nero notte · night black 3000K 31,2W 3,7
- Vb4.127.16** scurodivals 3000K 31,2W 3,7
- Vb4.127.18** grigio argento · silver grey 3000K 31,2W 3,7

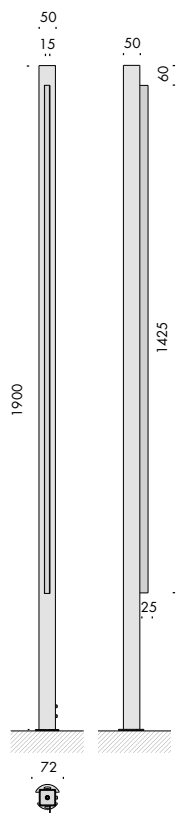

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9	Ta25 °C		vita media · average life		50000 h	L80 B10		





square tube 1900 240V 50-60Hz   IP65  CE 

Vb4.127.22	bruno antico · antique brown	3000K	39W	4,4
Vb4.127.24	nero notte · night black	3000K	39W	4,4
Vb4.127.26	scurodivals	3000K	39W	4,4
Vb4.127.28	grigio argento · silver grey	3000K	39W	4,4

Ra	R9	ies tm/30		sdcm	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9 	Ta25 °C		vita media · average life	50000 h	L80	B10		

accessori. accessories. 

f9.009.01 flangia per rotazione 120°
rotation flang 0,2

f9.009.02 picchetto fissaggio a terra
ground fixing peg 0,7





Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

