



apparecchio di illuminazione a parete e soffitto per interni IP20 realizzato in estruso di alluminio ossidato.

modelli:

tessera modulo 1 150x170mm, tessera modulo 2 150x360mm, tessera modulo 3 150x560mm. cablato per sorgente elettronica spot G53 12V 2700K o 3000K fino a 15W 810lm con ottiche 11° 22° o 44° e orientabili singolarmente.

alimentatore 240V 50-60Hz incluso.

accessori: kit di fissaggio a binario, porta accessori, lente ellittica, lente diffondente e frangiluce nido d'ape.

finiture: argento opaco o nero55.

IP20 rated wall and ceiling light fitting for indoor use, made of oxidised extruded aluminium.

versions:


tessera module 1 150x170mm, tessera module 2 150x360mm, tessera module 3 150x560mm. wired for G53 12V 2700K or 3000K led spot component up to 15W 810lm with 11° 22° or 44° optics that can be adjusted individually.

240V 50-60Hz power supply included.

accessories: track fixing kit, accessory carrier, elliptical lens, diffusing lens, honeycomb louvre.

finish: matt silver or nero55.






tessera modulo 1 240V 50-60Hz   IP20  

Vb6.181.01 nero55 G53 60W 0,9


Vb6.181.02 argento opaco · matt silver G53 60W 0,9



tessera modulo 2 240V 50-60Hz   IP20  

Vb6.181.11 nero55 G53 2x30W 1

Vb6.181.12 argento opaco · matt silver G53 2x30W 1



tessera modulo 3 240V 50-60Hz   IP20  


Vb6.181.21 nero55 G53 3x20W 1,1

Vb6.181.22 argento opaco · matt silver G53 3x20W 1,1




kit di fissaggio a binario. track fixing kit.  

f9.181.91 nero · black 0,05



f9.181.92 bianco · white 0,05



interasse fori per installazione
installation hole distance

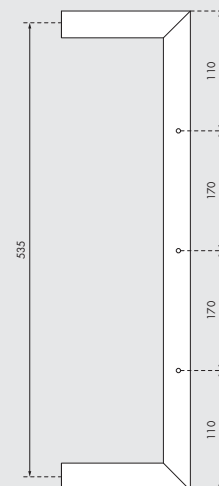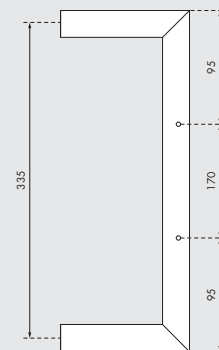

gradi di rotazione
rotation degrees



sorgente elettronica spot. led spot component. 12V L G53 Cc i

17.970						2700K	11°	0,2
17.971						2700K	22°	0,2
17.972						2700K	44°	0,2

Ra	ies tm/30		sdc	V _f	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	550	11	50	A
pd000	Ta25 °C vita media · average life			40000 h	L80	B10		

17.976						2700K	22°	0,2
17.977						2700K	44°	0,2

Ra	ies tm/30		sdc	V _f	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	800	15	53	A
pd010	Ta25 °C vita media · average life			40000 h	L80	B10		

17.973						3000K	11°	0,2
17.974						3000K	22°	0,2
17.975						3000K	44°	0,2

Ra	ies tm-30		sdc	V _{f (min)}	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	570	11	52	A
pd001	Ta25 °C vita media · average life			40000 h	L80	B10		


17.978						3000K	22°	0,2
17.979						3000K	44°	0,2


Ra	ies tm-30		sdc	V _{f (min)}	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	810	15	54	A
pd011	Ta25 °C vita media · average life			40000 h	L80	B10		

**accessori. accessories.**

CE ⓘ

f9.001.11	porta accessori nero · accessory carrier black	0,01
f9.001.12	porta accessori argento · accessory carrier silver	0,01
f9.001.25	lente ellittica · elliptical lens	0,04
f9.001.27	lente diffondente · diffusing lens	0,05
f9.001.31	frangiluce nido d'ape · louver honeycomb	0,01

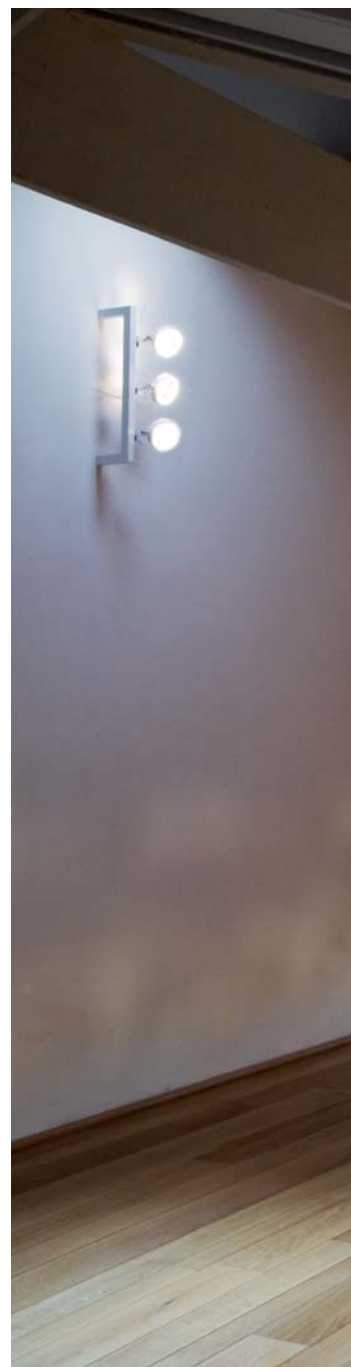

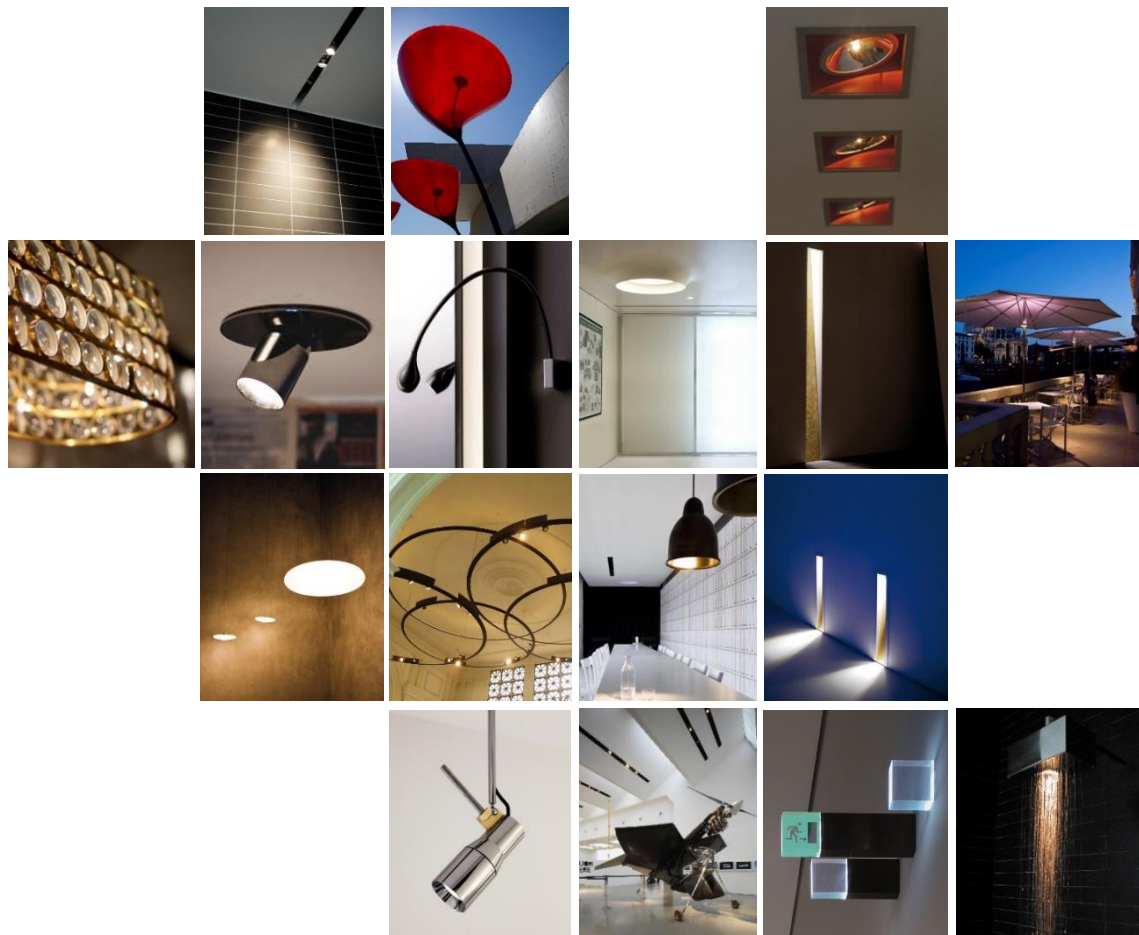

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

