



apparecchio di illuminazione da terra per esterni IP65.

realizzato in acciaio AISI 316L lucido, acciaio cor-ten o acciaio AISI 304 sabbiato e verniciato a polvere.

composto da un corpo verticale con testa palo singolo o doppio. modelli:

erste 01 h.500mm con testa palo singolo 200x160mm,

erste 02 h.1000mm con testa palo singolo 200x160mm,

erste 03 h.1000mm con testa palo doppio 320x160mm.

cablato con sorgente elettronica 3000K 18,6W 2027lm o 2x18,6W 2x2027lm.

alimentatore 240V 50-60Hz incluso

ottiche: 90°x70°

finiture: inox AISI 316L lucido,

acciaio cor-ten, bruno antico,

nero notte, scurodivals.

la versione inox AISI 316L lucido è idonea anche per l'installazione in ambiente marittimo.

la versione inox AISI 316L lucido è idonea anche per l'installazione in ambiente marittimo.

IP65 rated floor-standing light fitting for outdoor use.

made of AISI 316L polished steel, cor-ten steel or AISI 304 sanded and powder coated steel for outdoor use, consisting of a vertical body with single or double pole head.

versions:

erste 01 h.500mm with 200x160mm single pole head,

erste 02 h.1000mm with 200x160mm single pole head,

erste 03 h.1000mm with 320x160mm double pole head.

wired with 3000K 18.6W 2027lm or 2x18.6W 2x2027lm led sources.

240V 50-60Hz power supply included.

optics: 90°x70°

finishes: polished AISI 316L stainless, steel, cor-ten steel,

antique brown, night black, scurodivals.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.


the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.

the AISI 316L polished stainless steel version can also be installed in marine environment.





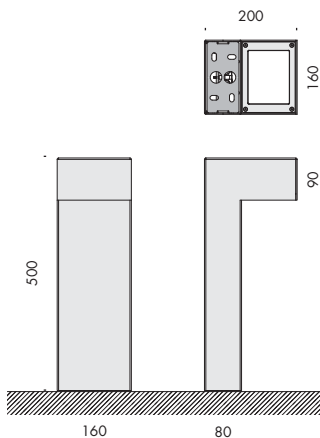

erste 01 240V 50-60Hz IP65

Vb1.622.01	inox AISI 316L lucido idoneo anche in ambiente marittimo polished 316L stainless steel suitable in marine environment	3000K	90°x70°	11
Vb1.622.02	acciaio cor-ten · cor-ten steel	3000K	90°x70°	11
Vb1.622.03	bruno antico · antique brown	3000K	90°x70°	11
Vb1.622.04	nero notte · night black	3000K	90°x70°	11
Vb1.622.05	scurodivals	3000K	90°x70°	11


Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	1050	17,7	2027	18,6	109	A+
ce021	les9 ●	Ta25 °C	vita media · average life		50000 h	L80	B10		

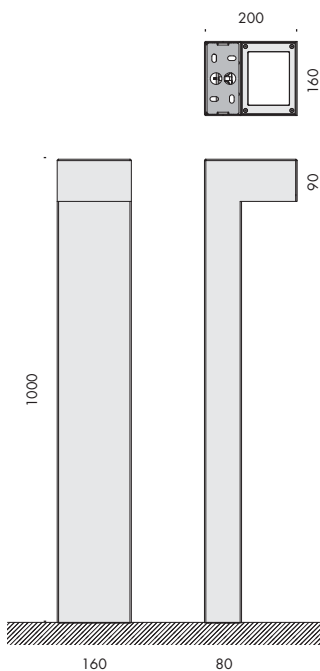
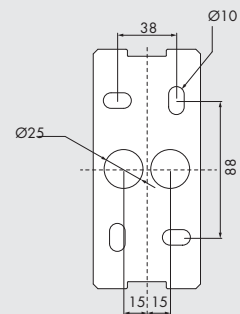


erste 02 240V 50-60Hz IP65

Vb1.622.11	inox AISI 316L lucido idoneo anche in ambiente marittimo polished 316L stainless steel suitable in marine environment	3000K	90°x70°	16
Vb1.622.12	acciaio cor-ten · cor-ten steel	3000K	90°x70°	16
Vb1.622.13	bruno antico · antique brown	3000K	90°x70°	16
Vb1.622.14	nero notte · night black	3000K	90°x70°	16
Vb1.622.15	scurodivals	3000K	90°x70°	16

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	1050	17,7	2027	18,6	109	A+
ce021	les9 ●	Ta25 °C	vita media · average life		50000 h	L80	B10		

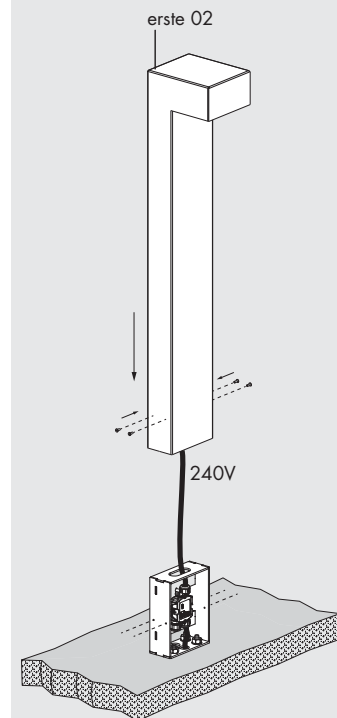

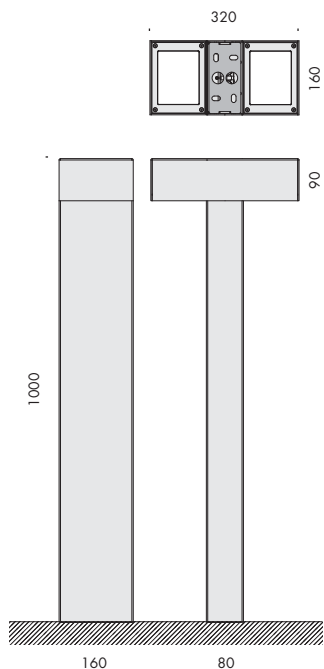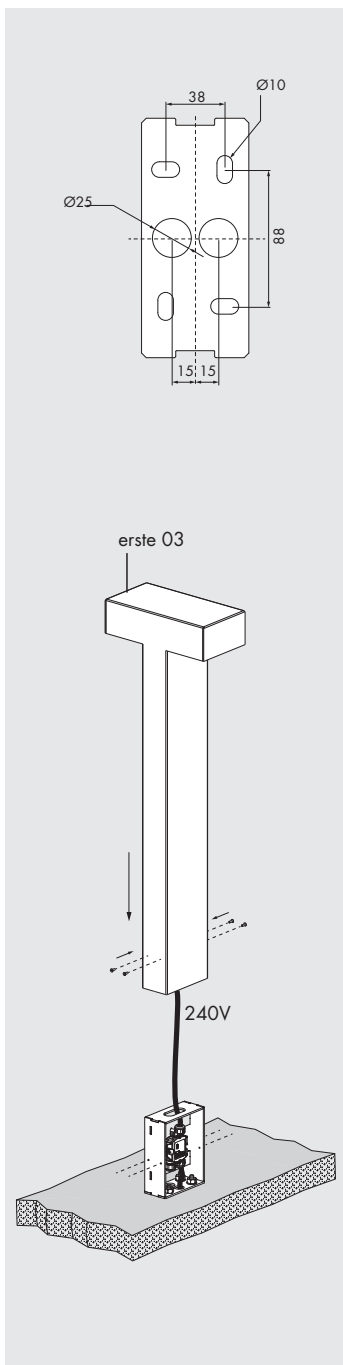

erste 03 240V 50-60Hz IP65

Vb1.622.21 inox AISI 316L lucido idoneo anche in ambiente marittimo
polished 316L stainless steel suitable in marine environment 3000K 2x18,6W 90°x70° 18

Vb1.622.22 acciaio cor-ten · cor-ten steel 3000K 2x18,6W 90°x70° 18

Vb1.622.23 bruno antico · antique brown 3000K 2x18,6W 90°x70° 18

Vb1.622.24 nero notte · night black 3000K 2x18,6W 90°x70° 18

Vb1.622.25 scurodivals 3000K 2x18,6W 90°x70° 18

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	1050	17,7	4054	37,2	109	A+
ce021-2	les9	Ta25 °C	vita media · average life	50000 h	L80	B10			





Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

