



apparecchio di illuminazione a soffitto o incasso per interni ed esterni IP44.

realizzato in alluminio estruso di forma cubica ossidato o anticato, completo di vetro di protezione.

dimensioni:

100x100mm h.110mm

cablato con sorgente elettronica 2700K o 3000K Ra95 12,4W fino a 826lm.

alimentatore 240V 50-60Hz in corrente costante incluso.

ottiche: 13° 20° 36°

accessori: cassaforma in gesso a scomparsa totale per installazione a incasso.

finiture: argento hacca, marrone mn e my bianco.

IP44 rated ceiling or recessed light fitting for indoor and outdoor use. made of powder coated extruded oxidised aluminium in the shape of a cube, complete with protective glass.

sizes: 100x100mm h.110mm.

wired with 2700K or 3000K Ra95 12.4W up to 826lm led source.


240V 50-60Hz non dimmable power supply included.

optics: 13° 20° 36°

accessories: fully concealed plaster housing for recessed installation.

finishes: argento hacca, marrone mn e my bianco.







leis		240V 50-60Hz		A	IP44	CE	i
Vb6.184.31.27	argento hacca			2700K	13°	0,8	
Vb6.184.33.27	marrone mn			2700K	13°	0,8	
Vb6.184.35.27	my bianco			2700K	13°	0,8	
Vb6.184.41.27	argento hacca			2700K	20°	0,8	
Vb6.184.43.27	marrone mn			2700K	20°	0,8	
Vb6.184.45.27	my bianco			2700K	20°	0,8	
Vb6.184.51.27	argento hacca			2700K	36°	0,8	
Vb6.184.53.27	marrone mn			2700K	36°	0,8	
Vb6.184.55.27	my bianco			2700K	36°	0,8	


Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	A
95	Rf 92	Rg 100	step 2	700	17,8	767	12,4	62	A
cd010	les6	Ta25 °C	vita media · average life	50000 h	L70	B10			

Vb6.184.31.30	argento hacca			3000K	13°	0,8	
Vb6.184.33.30	marrone mn			3000K	13°	0,8	
Vb6.184.35.30	my bianco			3000K	13°	0,8	
Vb6.184.41.30	argento hacca			3000K	20°	0,8	
Vb6.184.43.30	marrone mn			3000K	20°	0,8	
Vb6.184.45.30	my bianco			3000K	20°	0,8	
Vb6.184.51.30	argento hacca			3000K	36°	0,8	
Vb6.184.53.30	marrone mn			3000K	36°	0,8	
Vb6.184.55.30	my bianco			3000K	36°	0,8	

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	A
95	Rf 92	Rg 100	step 2	700	17,8	826	12,4	66	A
cd011	les6	Ta25 °C	vita media · average life	50000 h	L70	B10			

interasse fori di installazione
installation hole distance

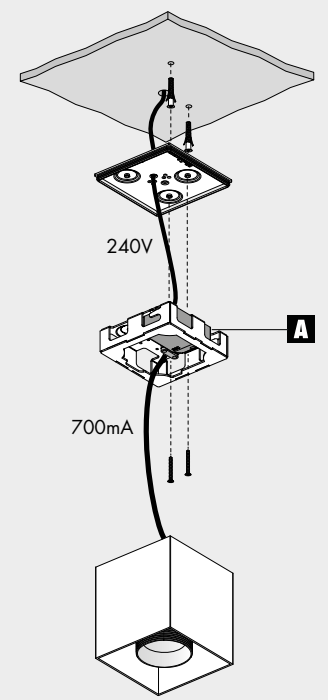







accessori. accessories.

CE i


f9.184.81 cassaforma in gesso a scomparsa totale
fully concealed plaster housing

2,5

cassaforma in gesso a scomparsa totale f9.184.81
fully concealed plaster housing

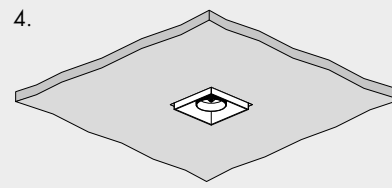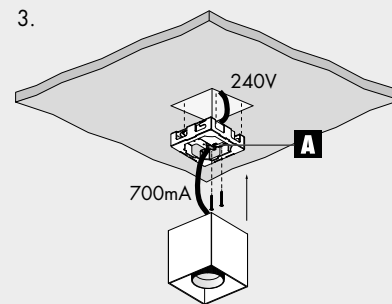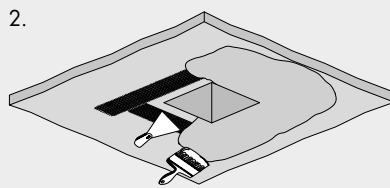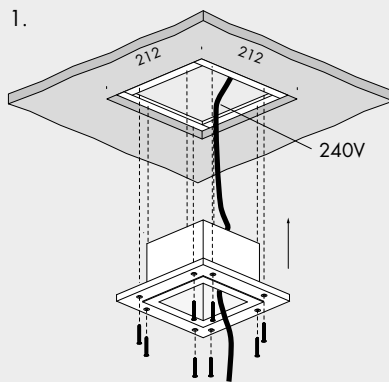



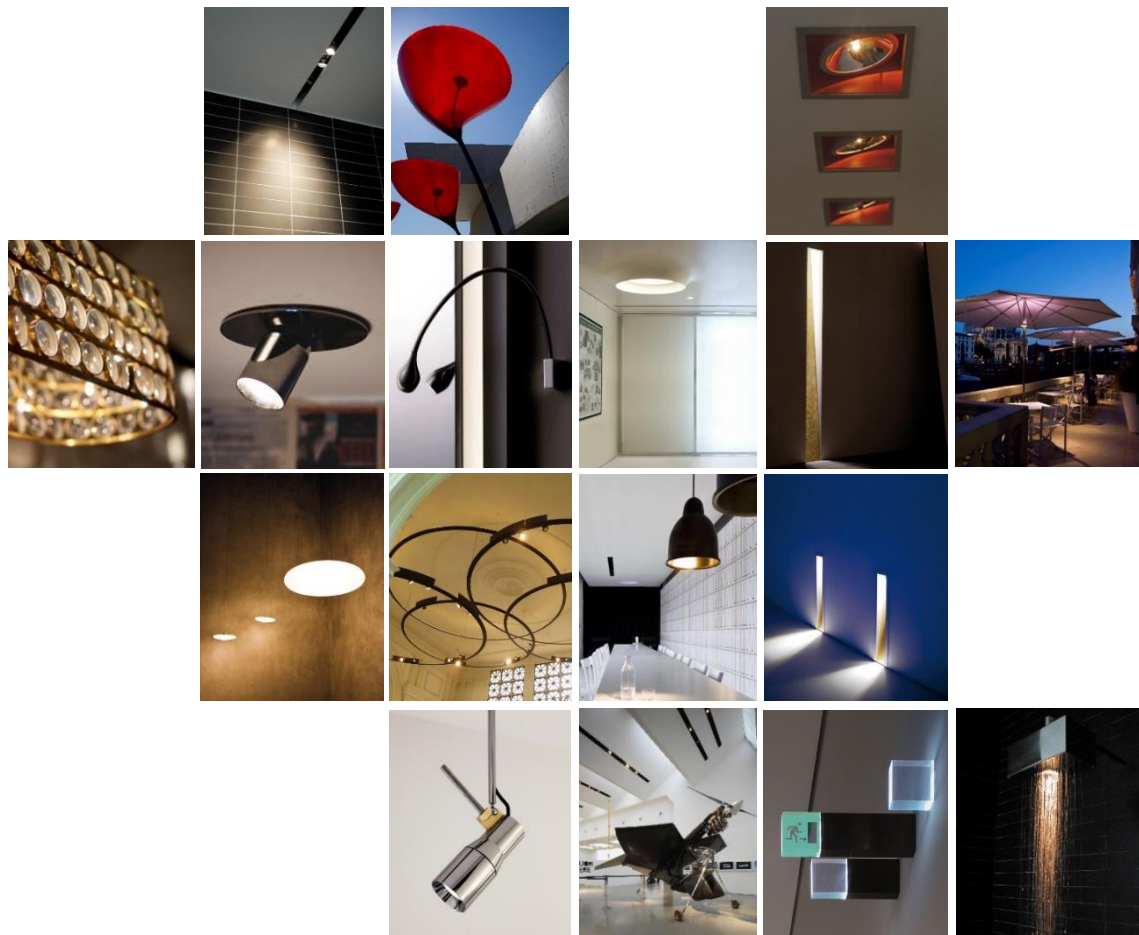

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

