



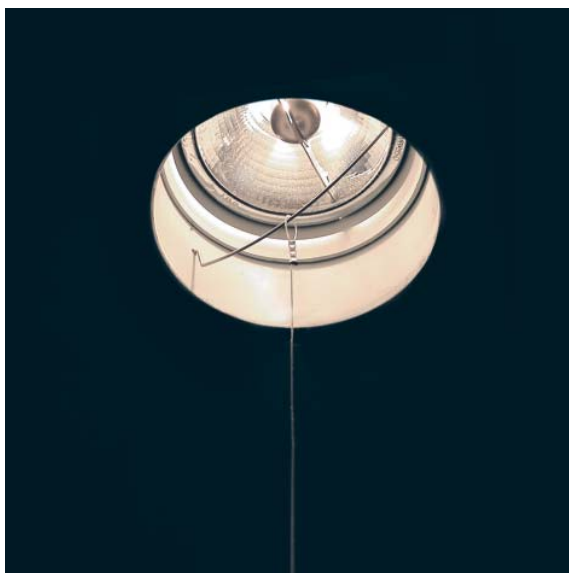

**apparecchio di illuminazione a scomparsa totale per interni IP20.  
realizzato in alluminio ossidato, diametro Ø80mm h.86mm, da installare tramite apposita  
cassaforma scomparsa totale.  
cablato con con sorgente elettronica 3000K 20W 1200lm 350mA.  
alimentatore in corrente costante escluso da installare remoto.  
componenti: cassaforma scomparsa totale; cristallo, costituito da un filo di ottone lavorato  
a mano, cristallo di boemia e nappa di colore rosso; filo di bava, con all'estremità inferiore  
una clip di sostegno per un blocchetto per appunti.  
finiture: my bianco, nero55, ottone ap-s e argento opaco e argento opaco.**

**fully concealed IP20 rated light fitting for indoor use.  
made of oxidised aluminium (Ø80mm h.86mm) to be installed using the appropriate fully  
concealed housing.  
wired with 3000K 20W 1200lm 350mA led source.  
constant current power supply not included, to be installed remotely.  
components: fully concealed housing; crystal, made of an handmade brass wire, bohemian  
crystal and red pendant; nylon thread, with a clip at the bottom end for supporting  
a small notepad.  
finish: my bianco, nero55, ottone ap-s e argento opaco and matt silver.**




**clv1 scomparsa totale**

**IP20**

**CE**


<b>Vb6.517.02</b>	my bianco	0,3
<b>Vb6.517.03</b>	nero55	0,3
<b>Vb6.517.04</b>	ottone ap-s	0,3

**kit**

**IP20**

**CE**




<b>Vb6.517.11.27</b>	argento opaco · matt silver	2700K	12°	0,4
<b>Vb6.517.12.27</b>	argento opaco · matt silver	2700K	29°	0,4


Ra	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	33,9	1209	12	101	<b>A+</b>
ci000	les14	●	Ta25 °C	vita media · average life		50000 h	L70	B10	

<b>Vb6.517.11.30</b>	argento opaco · matt silver	3000K	12°	0,4
----------------------	-----------------------------	-------	-----	-----


<b>Vb6.517.12.30</b>	argento opaco · matt silver	3000K	29°	0,4
----------------------	-----------------------------	-------	-----	-----

Ra	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	33,9	1293	12	108	<b>A+</b>
ci001	les14	●	Ta25 °C	vita media · average life		50000 h	L70	B10	

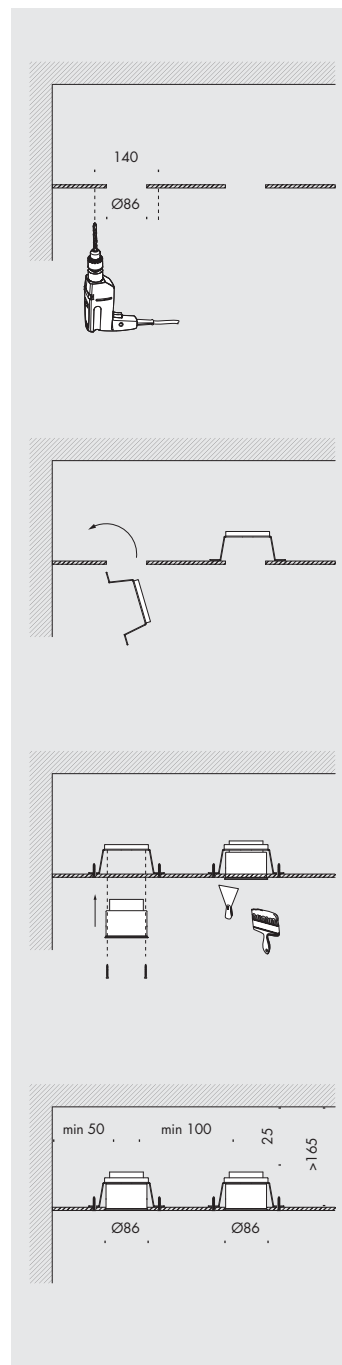

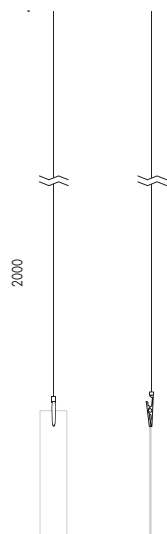


accessori. accessories.



a9.517.82 clip

0,01



a9.517.91 cristallo · glass

0,3





Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

