



**apparecchio di illuminazione a soffitto e sospensione per interni IP20.  
realizzato in alluminio e vetro rudentato diametro Ø136mm h.500mm.**

**modelli:**

**ansa soffitto,**

**ansa sospensione con tige rigida h.1000mm completa di rosone.**

**cablato con sorgente elettronica 3000K Ra98 24,4W per luce diretta con ottiche 19° e 38° e  
3000K Ra95 5W per luce indiretta.**

**alimentatore 240V 50-60Hz incluso.**

**fi niture: argento hacca e vetro rudentato trasparente.**

**IP20 rated ceiling or suspended light fitting for indoor use.**

**made of aluminium or grooved glass, Ø136mm h.500mm.**

**versions:**

**ansa soffitto,**

**ansa sospensione with h.1000mm long rigid suspension rod rose included.**



**wired with 3000K Ra98 24,4W led source for direct light with 19° and 38° optics and  
3000K Ra95 5W for indirect light.**

**240V 50-60Hz power supply included.**

**fi nishes: argento hacca and transparent grooved glass.**





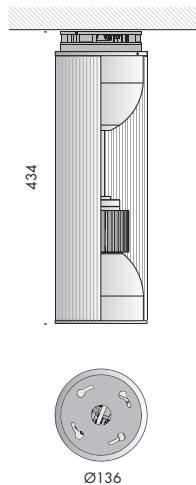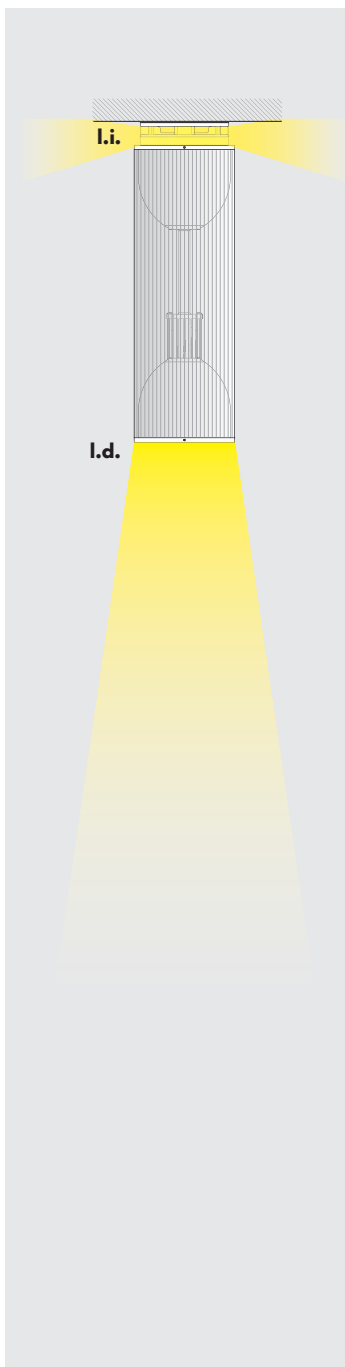

ansa soffitto

240V 50-60Hz **A**

⊕ IP20

⚠ CE i

**Vb6.038.11** argento hacca 3000K l.d. 24,4W 19° 4,5  
 vetro rudentato - grooved glass l.i. 5W


**Vb6.038.12** argento hacca 3000K l.d. 24,4W 38° 4,5  
 vetro rudentato - grooved glass l.i. 5W

**l.d. (luce diretta - direct light)**

Ra	R9	ies tm-30		sdc	mA	V <sub>f (min)</sub>	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	850	28,7	2508	24,4	103	<b>A+</b>
xm001	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		

**l.i. (luce indiretta - indirect light)**

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	<b>A+</b>
V0001	5,9	Ta25 °C		vita media · average life		50000 h	L80	B10	

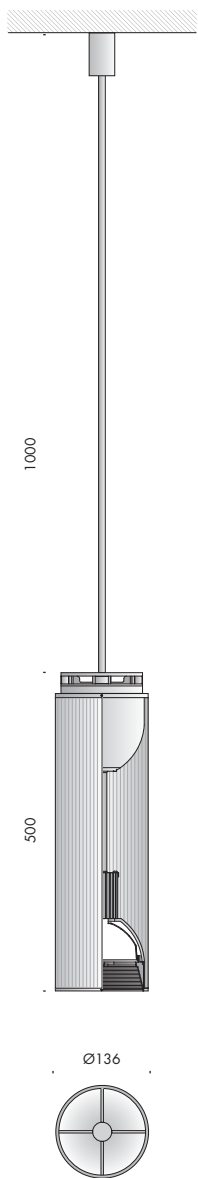

**ansa sospensione** 240V 50-60Hz IP20


- Vb8.038.41** argento hacca 3000K l.d. 24,4W 19° 4,5  
 vetro rudentato - grooved glass l.i. 5W
- Vb8.038.42** argento hacca 3000K l.d. 24,4W 38° 4,5  
 vetro rudentato - grooved glass l.i. 5W

**I.d. (luce diretta - direct light)**


Ra	R9	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	850	28,7	2508	24,4	103	<b>A+</b>
xm001	les19	Ta25 °C		vita media · average life		70000 h	L80	B10		


**I.i. (luce indiretta - indirect light)**

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	<b>A+</b>
V0001	5,9	Ta25 °C		vita media · average life		50000 h	L80	B10	

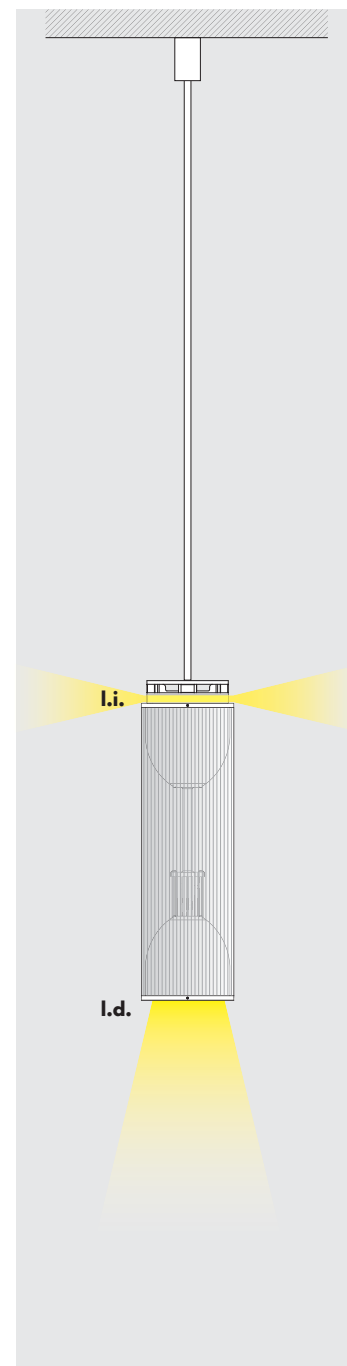



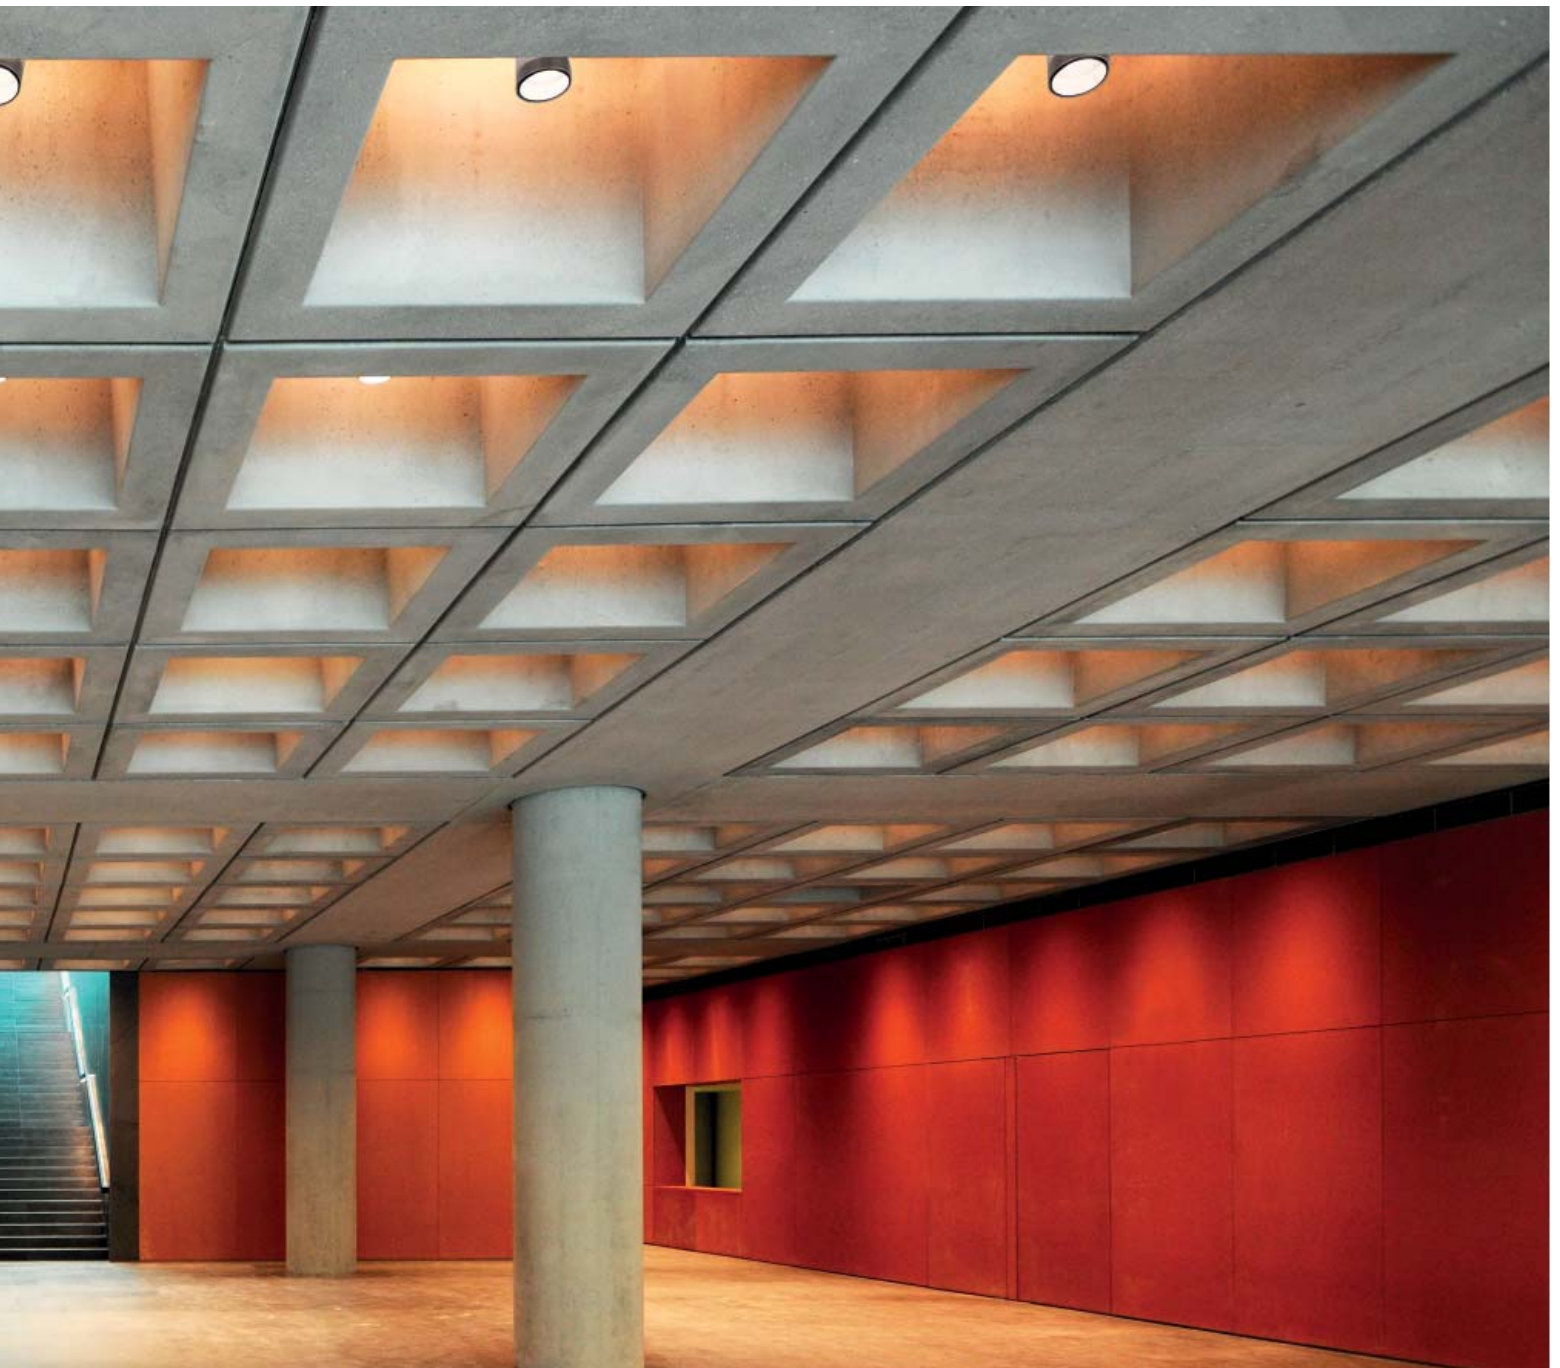

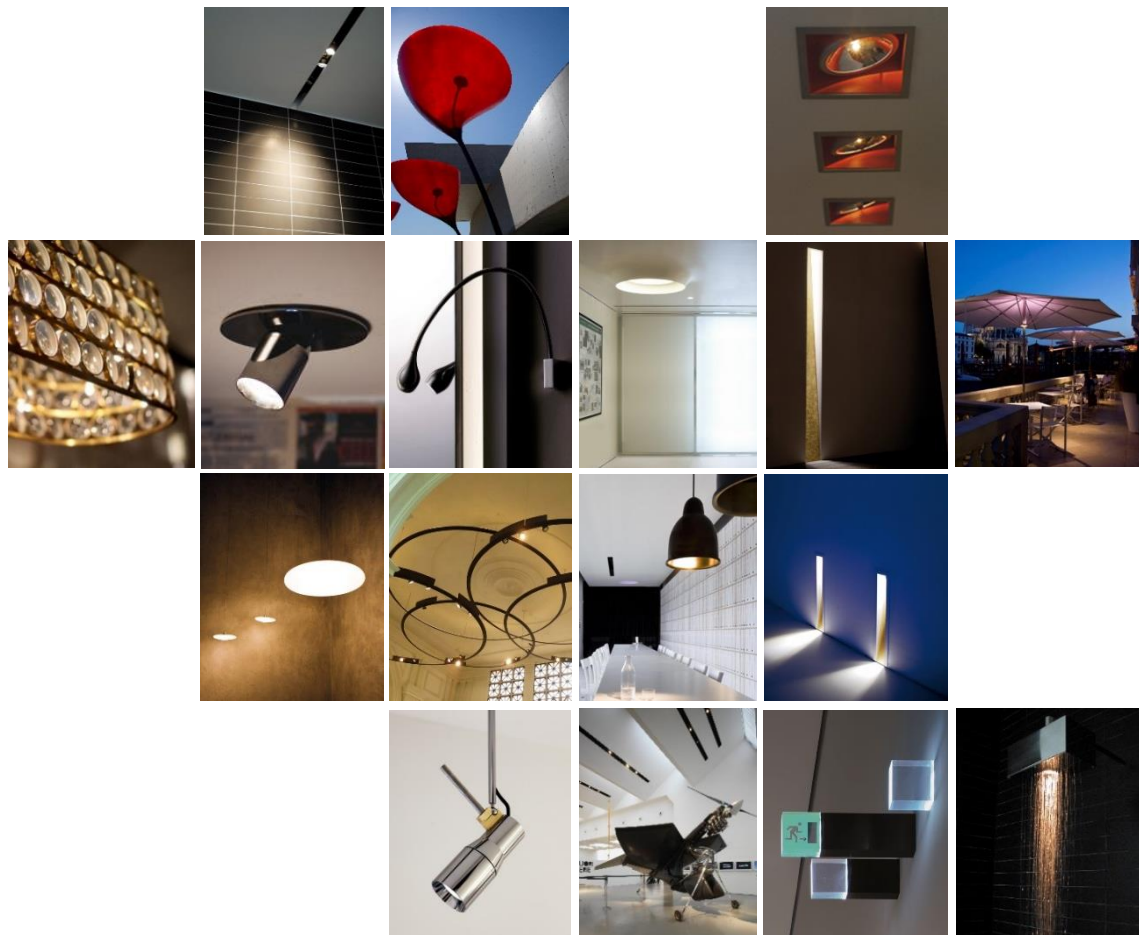

Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

