



apparecchio di illuminazione ad incasso per interni IP20.
realizzato in alluminio pressofuso ossidato e verniciato a polvere, con molle di fissaggio in acciaio inox.

modelli:

015 piccolo diametro Ø85mm h.70mm fino a 11,5W 1183lm, con ottiche 13° 20° 36°

015 medio diametro Ø137mm h.70mm fino a 22W 2920lm, con ottiche 20° 27° 40°

015 grande diametro Ø185mm h.70mm fino a 22W 2920lm, con ottiche 17° 55°

cablato con sorgente elettronica 2700K o 3000K.

alimentatore in corrente costante escluso, da installare remoto.

finiture: my bianco e nero55.

IP20 rated recessed light fitting for indoor use.

made of oxidised and powder coated die-cast aluminium, with stainless steel fixing springs.

versions:

015 piccolo diameter Ø 85mm h.70mm up to 11.5W 1183lm, with 13° 20° 36° optics,

015 medio diameter Ø137mm h.70mm up to 22W 2920lm, with 20° 27° 40° optics,


015 grande diameter Ø185 mm h.70 mm up to 22W 2920lm, with 17° 55° optics.

wired with 2700K or 3000K led source.

constant current power supply not included, to be installed remotely.

finishes: my bianco and nero55.








015 piccolo						IP20	★	CE	i
Vb6.617.01.27	my bianco	2700K	13°	0,8					
Vb6.617.02.27	nero55	2700K	13°	0,8					
Vb6.617.03.27	my bianco	2700K	20°	0,8					
Vb6.617.04.27	nero55	2700K	20°	0,8					
Vb6.617.05.27	my bianco	2700K	36°	0,8					
Vb6.617.06.27	nero55	2700K	36°	0,8					

Ra	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	16,0	586	5,7	103	A++
				500	16,2	819	8,1	101	A++
				700	16,5	1105	11,5	96	A+
cd000	les6	Ta25 °C	vita media · average life	50000 h	l80	B10			

Vb6.617.01.30	my bianco	3000K	13°	0,8					
Vb6.617.02.30	nero55	3000K	13°	0,8					
Vb6.617.03.30	my bianco	3000K	20°	0,8					
Vb6.617.04.30	nero55	3000K	20°	0,8					
Vb6.617.05.30	my bianco	3000K	36°	0,8					
Vb6.617.06.30	nero55	3000K	36°	0,8					

Ra	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	16,0	630	5,7	110	A++
				500	16,2	877	8,1	108	A++
				700	16,5	1183	11,5	102	A+
cd001	les6	Ta25 °C	vita media · average life	50000 h	l80	B10			



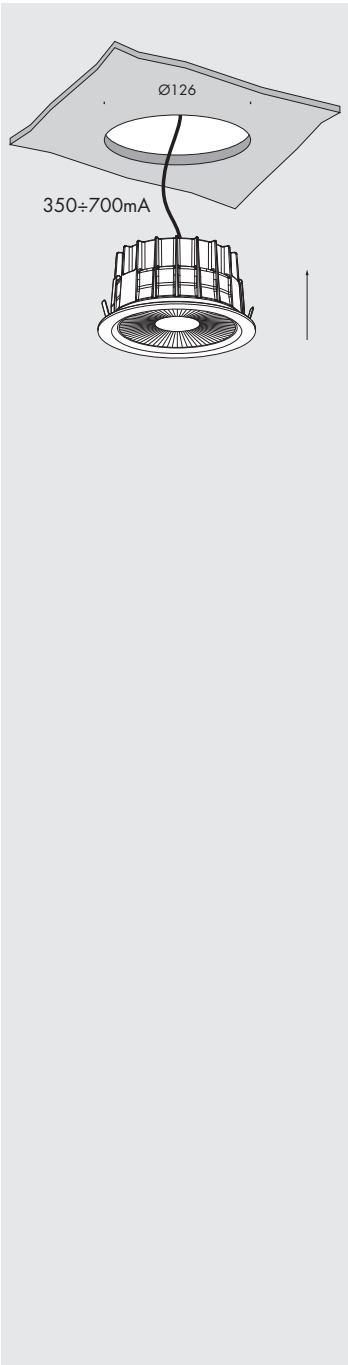



015 medio							
Vb6.617.11.27	my bianco	2700K	20°	0,9			
Vb6.617.12.27	nero55	2700K	20°	0,9			
Vb6.617.13.27	my bianco	2700K	27°	0,9			
Vb6.617.14.27	nero55	2700K	27°	0,9			
Vb6.617.15.27	my bianco	2700K	40°	0,9			
Vb6.617.16.27	nero55	2700K	40°	0,9			

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2		350	30,4	1521	10,6	143	A++
					500	30,8	2112	15,4	137	A++
					700	31,4	2865	22,0	131	A++
sl010	les17 		Ta25 °C		vita media · average life		50000 h		L80 B10	

Vb6.617.11.30	my bianco	3000K	20°	0,9			
Vb6.617.12.30	nero55	3000K	20°	0,9			
Vb6.617.13.30	my bianco	3000K	27°	0,9			
Vb6.617.14.30	nero55	3000K	27°	0,9			
Vb6.617.15.30	my bianco	3000K	40°	0,9			
Vb6.617.16.30	nero55	3000K	40°	0,9			

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	30,4	1550	10,6	146	A++	
				500	30,8	2152	15,4	140	A++	
				700	31,4	2920	22,0	133	A++	
sl011	les17 		Ta25 °C		vita media · average life		50000 h		L80 B10	



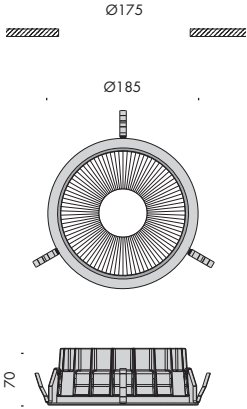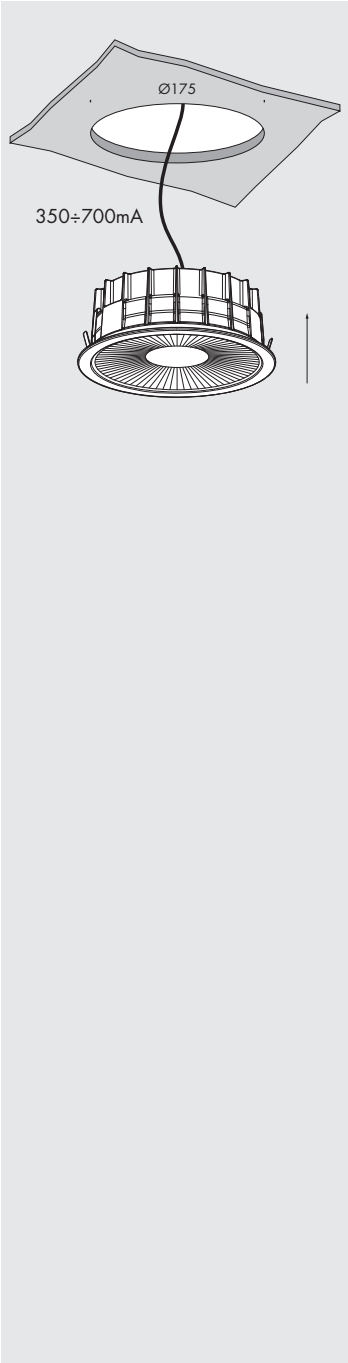

015 grande


CE


Vb6.617.21.27	my bianco	2700K	17°	1,1
Vb6.617.22.27	nero55	2700K	17°	1,1
Vb6.617.23.27	my bianco	2700K	55°	1,1
Vb6.617.24.27	nero55	2700K	55°	1,1

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2		350	30,4	1521	10,6	143	A++
					500	30,8	2112	15,4	137	A++
					700	31,4	2865	22,0	131	A++
sl010	les17	Ta25 °C		vita media · average life		50000 h		L80 B10		

Vb6.617.21.30	my bianco	3000K	17°	1,1			
Vb6.617.22.30	nero55	3000K	17°	1,1			
Vb6.617.23.30	my bianco	3000K	55°	1,1			
Vb6.617.24.30	nero55	3000K	55°	1,1			

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2		350	30,4	1550	10,6	146	A++
					500	30,8	2152	15,4	140	A++
					700	31,4	2920	22,0	133	A++
sl011	les17 	Ta25 °C		vita media · average life		50000 h		L80 B10		

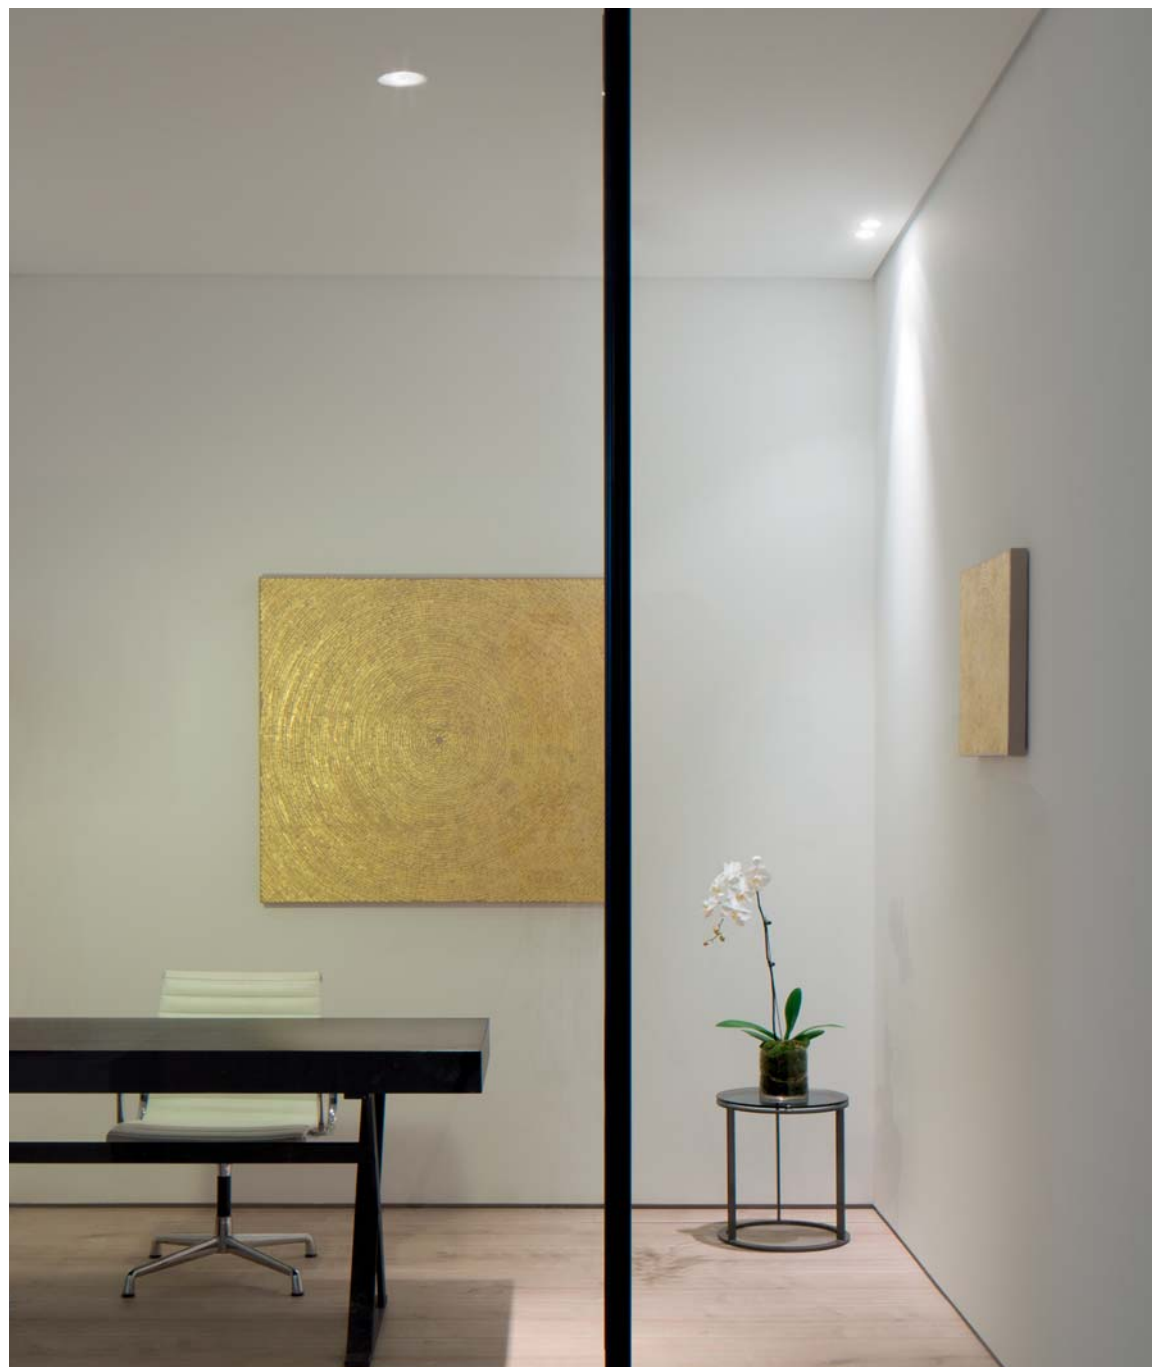

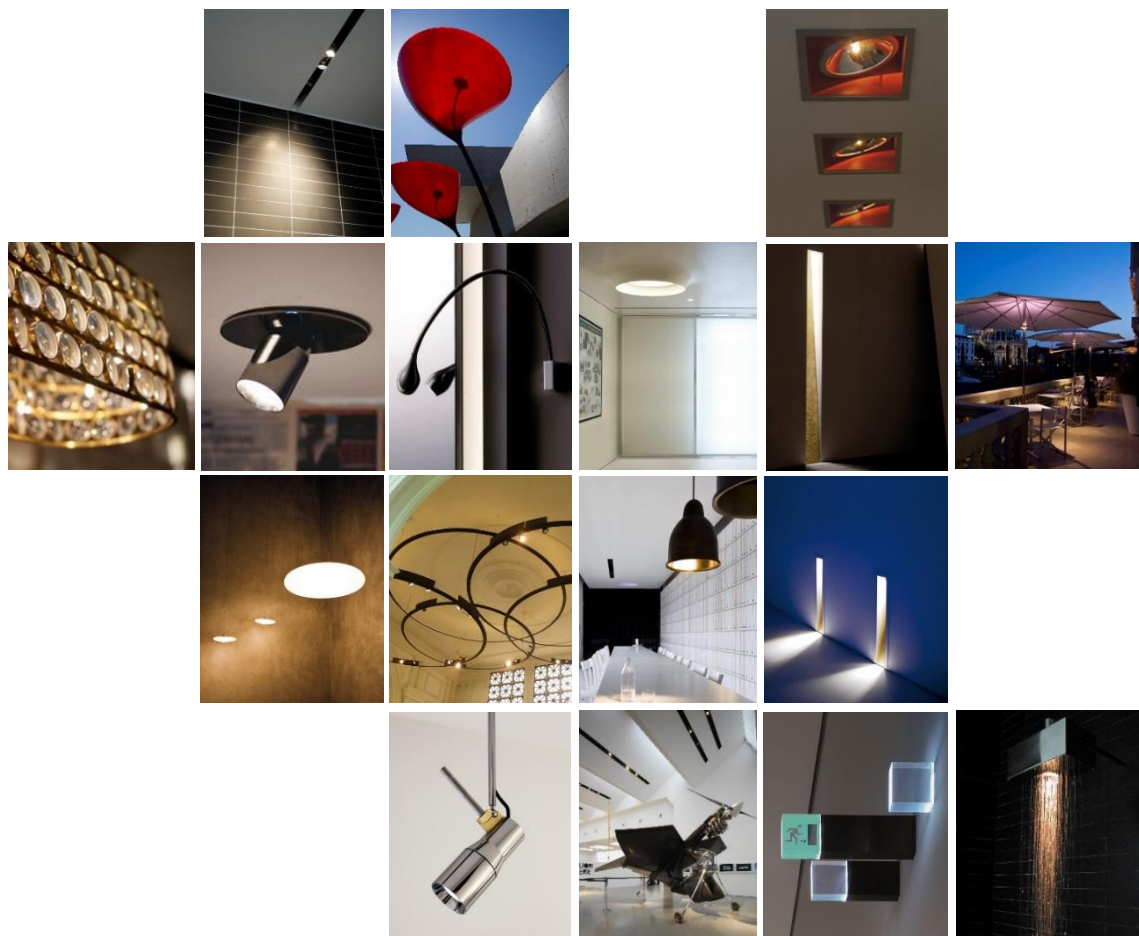

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

