tessera barbara balestreri mario nanni 2006

apparecchio di illuminazione a parete e soffitto per interni IP20 realizzato in estruso di alluminio ossidato.
modelli:
tessera modulo 1 150x170mm,
tessera modulo 2 150x360mm,
tessera modulo 3 150x560mm.
cablato per sorgente elettronica spot G53 12V 2700K o 3000K fino a 15W 810lm con ottiche 11° 22° o 44° e orientabili singolarmente.
alimentatore 240V 50-60Hz incluso.
accessori: kit di fissaggio a binario, porta accessori, lente ellittica, lente diffondente e frangiluce nido d'ape.
finiture: argento opaco o nero55.

IP20 rated wall and ceiling light fitting for indoor use, made of oxidised extruded aluminium.
versions:
tessera module 1 150x170mm,
tessera module 2 150x360mm,
tessera module 3 150x560mm.
wired for G53 12V 2700K or 3000K led spot component up to 15W 810lm with 11° 22° or 44° optics that can be adjusted individually.
240V 50-60Hz power supply included.
accessories: track fixing kit, accessory carrier, elliptical lens, diffusing lens, honeycomb louvre.
finish: matt silver or nero55.



tessera modulo 1	240V 50-60Hz	IP20		
Vb6.181.01	nero55	G53	60W	0,9
Vb6.181.02	argento opaco · matt silver	G53	60W	0,9



tessera modulo 2	240V 50-60Hz	IP20		
Vb6.181.11	nero55	G53	2x30W	1
Vb6.181.12	argento opaco · matt silver	G53	2x30W	1



tessera modulo 3	240V 50-60Hz	IP20		
Vb6.181.21	nero55	G53	3x20W	1,1
Vb6.181.22	argento opaco · matt silver	G53	3x20W	1,1



kit di fissaggio a binario. track fixing kit.		
f9.181.91	nero · black	0,05
f9.181.92	bianco · white	0,05

interasse fori per installazione
installation hole distance



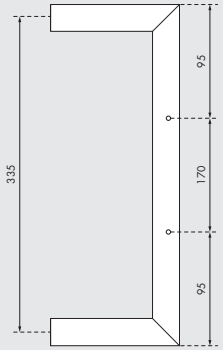

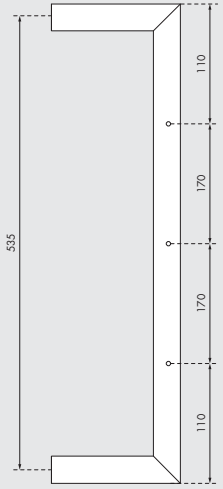

gradi di rotazione
rotation degrees





sorgente elettronica spot. led spot component.	**12V**	L	**G53**	CE		i
I7.970				2700K	11°	0,2
I7.971				2700K	22°	0,2
I7.972				2700K	44°	0,2

Ra	ies tm/30		sdcm	V_f	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	550	11	50	**A**
pd000	Ta25 °C		vita media · average life		40000 h		L80	B10

I7.976				2700K	22°	0,2		
I7.977				2700K	44°	0,2		

Ra	ies tm/30		sdcm	V_f	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	800	15	53	**A**
pd010	Ta25 °C		vita media · average life		40000 h		L80	B10

I7.973				3000K	11°	0,2		
I7.974				3000K	22°	0,2		
I7.975				3000K	44°	0,2		

Ra	ies tm-30		sdcm	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	570	11	52	**A**
pd001	Ta25 °C		vita media · average life		40000 h		L80	B10

I7.978				3000K	22°	0,2		
I7.979				3000K	44°	0,2		

Ra	ies tm-30		sdcm	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 89	Rg 102	step 3	12	810	15	54	**A**
pd011	Ta25 °C		vita media · average life		40000 h		L80	B10

accessori. accessories.		
f9.001.11	porta accessori nero · accessory carrier black	0,01
f9.001.12	porta accessori argento · accessory carrier silver	0,01
f9.001.25	lente ellittica · elliptical lens	0,04
f9.001.27	lente diffondente · diffusing lens	0,05
f9.001.31	frangiluce nido d'ape · louver honeycomb	0,01

Ø116 7

Ø106 25

Ø106 25

Ø106 3

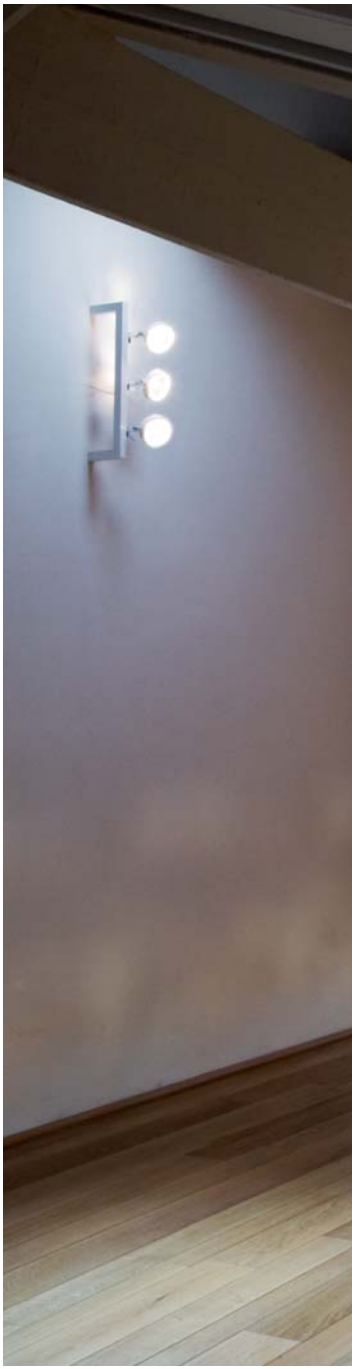





Subscribe To Our Newsletter

Cirrus Lighting

Distributor for Viabizzuno
Architectural Lighting Solutions
Web: www.cirruslighting.co.uk
Email: sales@cirruslighting.co.uk
Tel: 0207 193 2175
Fax: 0207 193 3175