# bacchetta magica led mario nanni 2009

***apparecchio di illuminazione per interni ed esterni IP65.***
***realizzato in policarbonato trasparente con trattamento per raggi ultravioletti, può essere installato a parete o a soffitto con gli appositi sistemi di fissaggio in dotazione o a sospensione tramite apposito kit non incluso.***
***modelli:***
***bacchetta magica led diametro Ø22mm disponibile in 635,935,1235 e 1535mm cablato con sorgente elettronica lineare 3000K Ra95 13W/m con connettore m8 IP67 incluso, alimentatore a tensione costante 24Vdc escluso, da installare remoto.***
***bacchetta magica led diametro Ø40mm disponibile in 935,1545 e 1845mm sia nella versione monoemissione cablata con sorgente elettronica lineare 3000K Ra95 26W/m sia biemissione cablata con doppia sorgente elettronica lineare 3000K Ra95 13W/m, alimentatore 240V 50-60Hz incorporato.***
***accessori: cavo di diverse lunghezze con connettore m8 IP67 per versione diametro Ø22mm, sistema di derivazione tensione continua, rosoni di alimentazione, kit di sospensione.***
***finiture: policarbonato trasparente.***

**IP65 rated light fitting for indoor and outdoor use.**
**made of transparent ultraviolet resistant polycarbonate, which can be wall or ceiling installed using the specific installation systems provided, or suspended using the kit to be ordered separately.**
**versions:**
**bacchetta magica led diameter Ø22mm available in 635,935,1235 and 1535mm wired with 3000K 13W/m linear led source with m8 IP67 connector included, constant voltage 24Vdc power supply not included, to be installed remotely.**
**bacchetta magica led diameter Ø40mm available in 935,1545 and 1845mm available either in the unidirectional version wired with 3000K Ra95 26W/m linear led source and the bi-directional version wired with 3000K Ra95 13W/m double linear led source, 240V 50-60Hz built-in power supply.**
**accessories: cable with m8 IP67 connector available in different lengths for diameter Ø22mm version, constant power derivation system, power supply roses, suspension kit.**
**finishes: transparent polycarbonate.**

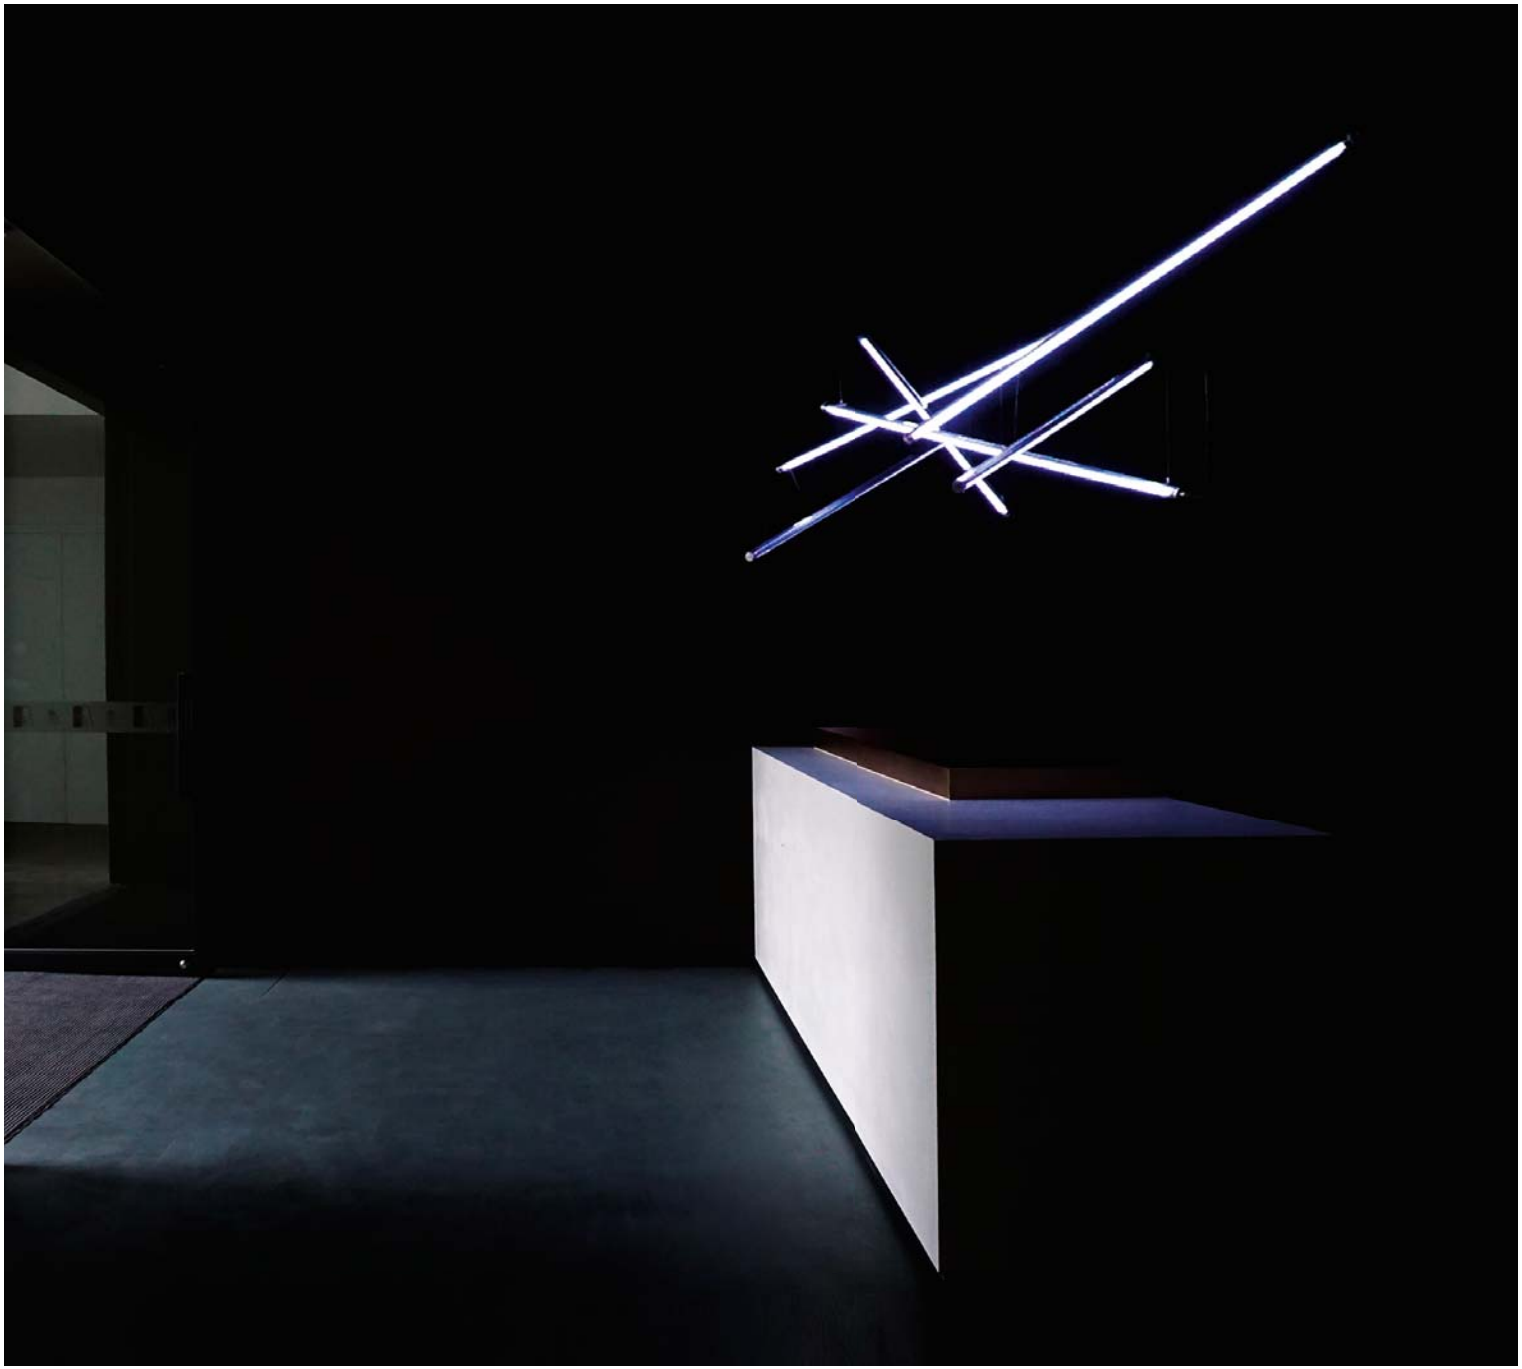




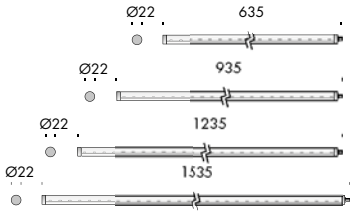


| **bacchetta magica led 22** | **24Vdc** | **IP65** | **IK09** | | |
|---|---|---|---|---|---|
| **f6.195.06** | 3000K | 7,8W | 635mm | 0,3 |
| **f6.195.09** | 3000K | 11,7W | 935mm | 0,4 |
| **f6.195.12** | 3000K | 15,6W | 1235mm | 0,5 |
| **f6.195.15** | 3000K | 19,5W | 1535mm | 0,7 |

| Ra | R9 | ies tm/30 | | sdcm | Vf | lm/m | W/m | lm/W | |
|---|---|---|---|---|---|---|---|---|---|
| 95 | 90 | Rf 93 | Rg 102 | step 2 | 24 | 1250 | 13 | 96 | **A+** |
| V0001 | 5,9 | Ta25 °C | | vita media · average life | | 50000 h | | L80 B10 | |



| **cavi con connettore femmina m8. cables with m8 female connector.** | **IP67** | |
|---|---|---|
| **f9.250.71** | 150mm | 0,01 |
| **f9.164.86** | 2000mm | 0,1 |
| **f9.164.87** | 5000mm | 0,2 |
| **f9.164.88** | 10000mm | 0,3 |

| **cavi con connettori m/f m8. cables with m8 m/f connectors.** | **IP67** | |
|---|---|---|
| **f9.250.72** | 2000mm | 0,1 |
| **f9.250.73** | 5000mm | 0,3 |
| **f9.250.74** | 10000mm | 0,6 |




| **sistema di derivazione tensione continua. dc derivation hub.** | | |
|---|---|---|
| **f9.250.79** | con 6 connettori femmina +1 connettore maschio m8<br>with 6 female connectors +1male connector m8 | 0,1 |

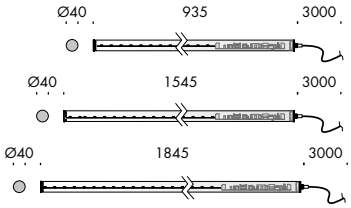


| bacchetta magica led 40 | 240V 50-60Hz | IP65 IK09 | | | |
|---|---|---|---|---|---|
| **Vb6.195.21** | | 3000K | 18W | 935mm | 0,8 |
| **Vb6.195.23** | | 3000K | 32W | 1545mm | 1,3 |
| **Vb6.195.25** | | 3000K | 40W | 1845mm | 1,6 |

| Ra | R9 | ies tm-30 | | sdcm | $V_f$ | lm/m | W/m | lm/W | |
|---|---|---|---|---|---|---|---|---|---|
| 95 | 90 | Rf 93 | Rg 102 | step 2 | 24 | 2500 | 26 | 96 | **A+** |
| V3001 | 11 | Ta25 °C | | vita media · average life | | 50000 h | | L80 | B10 |

bacchetta magica led 40
monoemissione · unidirectional



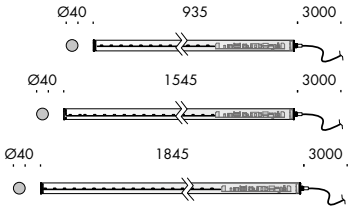


| bacchetta magica led 40 | 240V 50-60Hz | IP65 IK09 | | | |
|---|---|---|---|---|---|
| **Vb6.195.31** | | 3000K | 2x9W | 935mm | 0,8 |
| **Vb6.195.33** | | 3000K | 2x16W | 1545mm | 1,3 |
| **Vb6.195.35** | | 3000K | 2x20W | 1845mm | 1,6 |

bacchetta magica led 40
biemissione · bidirectional

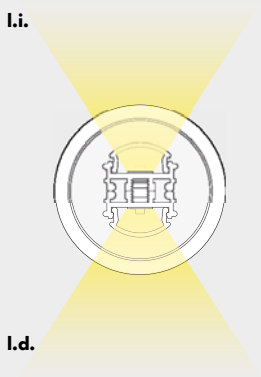


**l.d. (luce diretta · direct light)**

| Ra | R9 | ies tm/30 | | sdcm | Vf | lm/m | W/m | lm/W | |
|---|---|---|---|---|---|---|---|---|---|
| 95 | 90 | Rf 93 | Rg 102 | step 2 | 24 | 1250 | 13 | 96 | **A+** |
| V0001 | 5,9 | Ta25 °C | | vita media · average life | | 50000 h | | L80 | B10 |

**l.i. (luce indiretta · indirect light)**

| Ra | R9 | ies tm/30 | | sdcm | Vf | lm/m | W/m | lm/W | |
|---|---|---|---|---|---|---|---|---|---|
| 95 | 90 | Rf 93 | Rg 102 | step 2 | 24 | 1250 | 13 | 96 | **A+** |
| V0001 | 5,9 | Ta25 °C | | vita media · average life | | 50000 h | | L80 | B10 |




| accessori. accessories. | | | |
|---|---|---|---|
| **f9.116.05** | rosone di alimentazione<br>ceiling rose power supply | | 0,4 |
| **f9.116.06** | kit per sospensione · suspension kit | 3000mm | 0,1 |





## Subscribe To Our Newsletter

Cirrus Lighting

**Distributor for Viabizzuno**
**Architectural Lighting Solutions**
Web: www.cirruslighting.co.uk
Email: sales@cirruslighting.co.uk
Tel: 0207 193 2175
Fax: 0207 193 3175