

# si gira tavolo

mario nanni 2008



premio · award light of the future 2008 frankfurt

**apparecchio di illuminazione da tavolo per interni IP20 realizzato in alluminio ossidato e acciaio.**

**composto da diffusore luminoso, orientabile di 180° e 360° sugli assi orizzontali, braccio di 595mm che ruota di 360° sull'asse verticale, sostegno verticale di 325mm, sul quale sono posizionati i sensori touch on/off per il controllo separato della luce e una base in acciaio 130x140x14mm.**

**cablato con sorgente elettronica 3000K con luce spot 29° per luce d'accento 2,8W 280lm e luce diffusa 5,5W 528lm.**

**alimentatore 240V 50-60Hz con spina europea incluso e cavo di alimentazione 2000mm. accessori: spine uk, usa-jpn e aus.**

**finiture: nero55 e argento hacca.**

**IP20 rated table light fitting for indoor use, made of oxidised aluminium and steel. consisting of a light diffuser adjustable by 180° and 360° on the horizontal axes, 595mm arm rotating by 360° on the vertical axis, a 325mm vertical support housing the on/off touch sensors to individually control the light and a 130X140x14mm steel base.**


**wired with 3000K led source with 29° 2.8W 280lm spot light and 5.5W 528lm diffused light.**

**240V 50-60Hz power supply with 2000mm cable and european plug included.**

**accessories: uk, usa-jpn and aus plugs.**

**finishes: nero55 and argento hacca.**



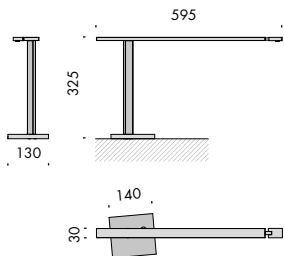

**si gira tavolo** 240V 50-60Hz IP20

**Vb2.537.05** argento hacca 3000K luce spot · spot light luce 29° 2,8W 3,5  
diffusa · diffused light 5,5W



**Vb2.537.06** nero55 3000K luce spot · spot light luce 29° 2,8W 3,5  
diffusa · diffused light 5,5W

**luce spot · spot light**

Ra	ies tm-30		sdc	mA	V <sub>f</sub> (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	250	11,0	280	2,8	100	<b>A++</b>
cc001	les4  Ta25 °C		vita media · average life		50000 h	L80	B10		

**luce diffusa · diffused light**

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	<b>A+</b>
V0001	5,9  Ta25 °C		vita media · average life		50000 h	L80	B10		

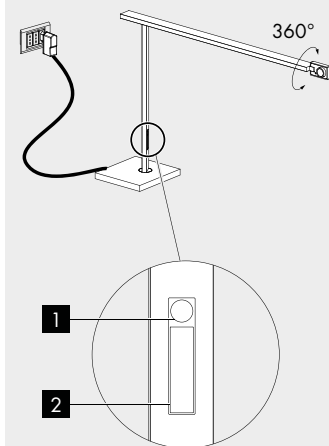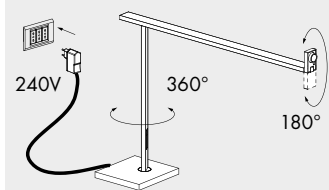


**spine. plugs.**

**a9.001.01** uk 0,1

**a9.001.02** usa-jpn 0,1

**a9.001.03** aus 0,1

- 1** interruttore touch on/off luce orientabile d'accento on/off touch switch for adjustable accent light
- 2** interruttore touch on/off luce diffusa on/off touch switch for diffused light

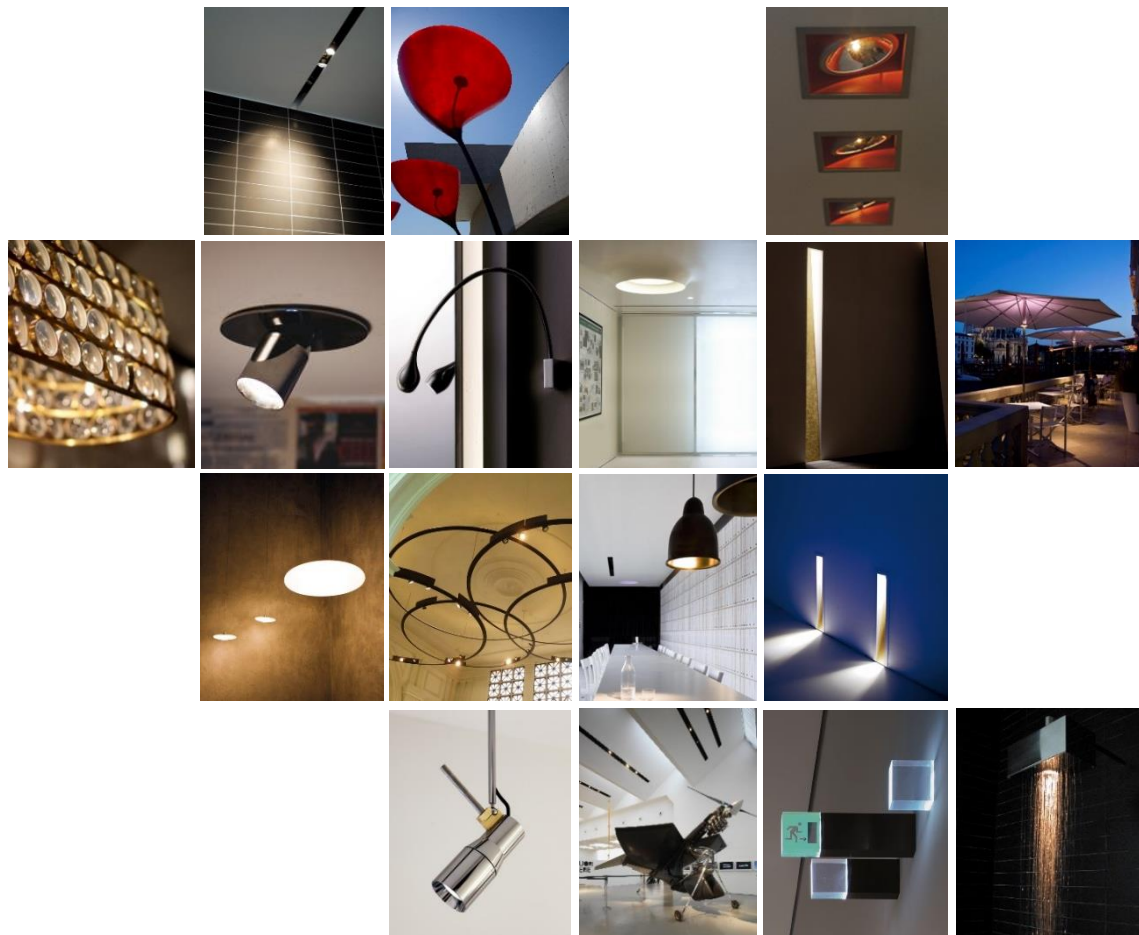

Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

