


kit elettrici di cablaggio per sistemi integrati con l'architettura UpO

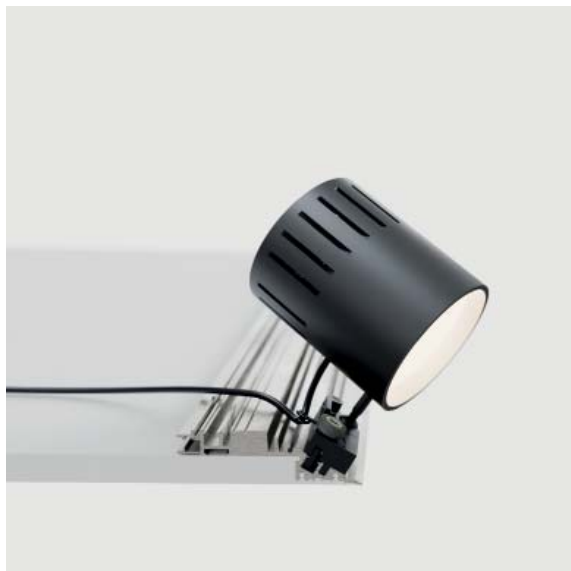

apparecchi di illuminazione per sistemi integrati con l'architettura per interni IP20. realizzati in alluminio ossidato e verniciato a polvere. compatibili indistintamente con tutti i sistemi integrati Viabizzuno e installabili con un aggancio ad innesto rapido.

modelli:

n55 system fino a 19,5W 2140lm, 13° 18° 19° 23° 30° 31° 37° 42° 46° 47°, econo system fino a 26,3W 2984lm 15° 25° 33°, linea di luce wallwasher fino a 52W 4992lm,


eco system fino a 30,5W 3000lm 12° 26° 36° 54°, eco mini system fino a 17,4W 1796lm 13° 19° 36°.

cablati con sorgente elettronica 2700K, 3000K, 3000Vb K o 3200Vb K (progettati per il settore alta moda).

accessori: frangiluce nido d'ape, lente ellittica, vetro albarino, anti abbagliamento, sagomatore per n55, ottiche, kit supporto luce lineare.

alimentatori esclusi, da installare remoti.

finiture: n55 system my bianco e nero55; econo system bianco V, nero55 e argento hacca; linea di luce continua wallwasher ossidato argento opaco; eco system e eco mini system my bianco e nero55.

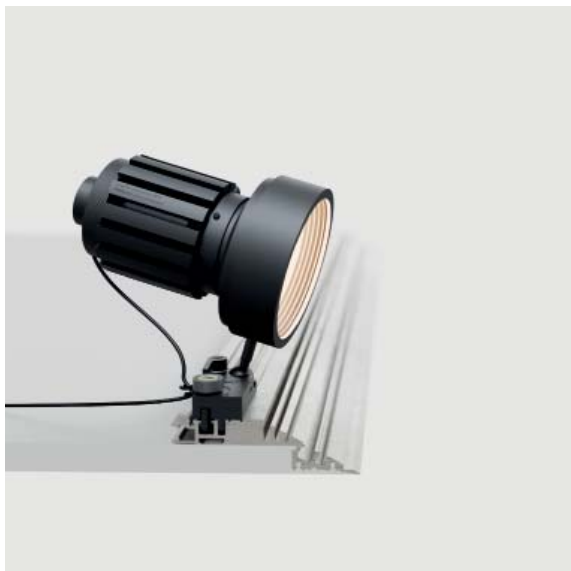

IP20 rated indoor light fitting for integrated systems built into the architecture.

made of oxidised and powder coated aluminium.

they are universally compatible with all Viabizzuno integrated systems and can be installed with a quick coupling hook.

versions:

n55 system up to 19.5W 2140lm, 13° 18° 19° 23° 30° 31° 37° 42° 46° 47°, econo system up to 26.3W 2984lm 15° 25° 33°, wallwasher line of light up to 52W 4992lm,

eco system up to 30.5W 3000lm 12° 26° 36° 54°, eco mini system up to 17.4W 1796lm 13° 19° 36°.

wired with 2700K, 3000K, 3000Vb K or 3200Vb K led source (designed for high fashion industry).

accessories: honeycomb louvre, elliptical lens, albarino glass, anti glare, profile spot for n55, optics, kit supporto luce lineare.

power supplies not included, to be installed remotely.

finishes: my bianco and nero55 for n55 system; bianco V, nero55 and argento hacca for econo system; oxidised matt silver wallwasher continuous line of light; my bianco and nero55 for eco system and eco mini system.

accendi

A minimalist architectural interior with white walls and a dark floor. A sharp, triangular shadow is cast on the left wall, and a bright light source is visible in the distance, creating a strong contrast. The word "accendi" is written in bold black letters on the left wall.

094 system

70mm

140mm

nicchia • cove

n55 system











econo system

linea di luce continua wallwasher led

eco mini system


eco system

kit supporto luce lineare

094 system cornici				094 system curvo		094 system aereo	
Ø100mm	Ø140mm	100x100mm	140x140mm	70mm	140mm	70mm	140mm
							
							
							
							
							

**impiego kit e accessori per
sistemi integrati con l'architettura**
use of kit and accessories for
systems built into the architecture







070 system





70mm

140mm

nicchia • cove



n55 system



econo system






linea di luce continua wallwasher led

eco mini system







eco system




kit supporto luce lineare





070 system cornici

100x100mm	140x140mm
	
	
	
	
	

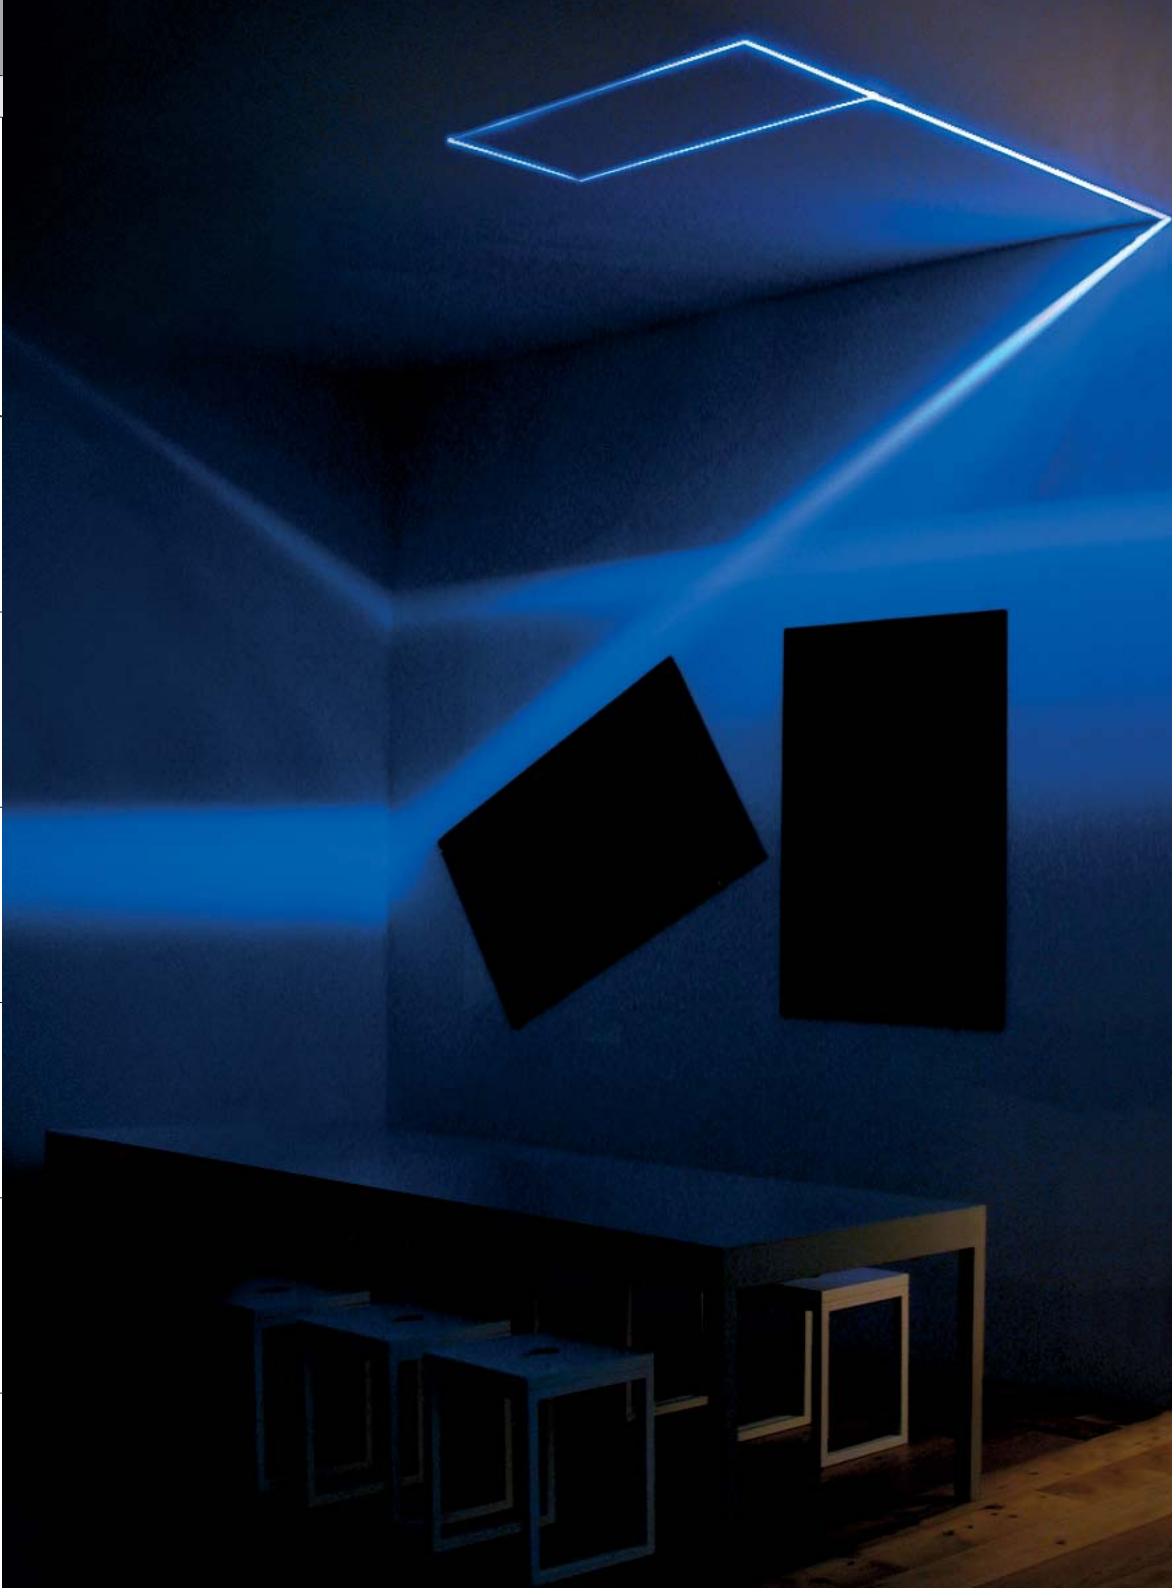

gradi di apertura fascio luminoso
beam's angle degrees



n55 system spot55x37



IP20



Vb6.594.01.27 my bianco 2700K 18° 0,7

Vb6.594.02.27 nero55 2700K 18° 0,7

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	
xe000	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.01.30 my bianco 3000K 18° 0,7

Vb6.594.02.30 nero55 3000K 18° 0,7

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	
xe001	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.01.30v my bianco 3000Vb K 18° 0,7

Vb6.594.02.30v nero55 3000Vb K 18° 0,7

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	27,9	1110	19,5	57	
xe007	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		

accessori. accessories.





Vb9.580.91 frangiluce nido d'ape · honeycomb louvre 0,01

Vb9.580.92 lente ellittica · elliptical lens 0,04





gradi di apertura fascio luminoso
beam's angle degrees



n55 system spot55x37



Vb6.594.11.27	my bianco	2700K	30°	0,8
Vb6.594.12.27	nero55	2700K	30°	0,8


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	
xm000	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.11.30	my bianco	3000K	30°	0,8
Vb6.594.12.30	nero55	3000K	30°	0,8

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	
xm001	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.11.30v	my bianco	3000Vb K	30°	0,8
Vb6.594.12.30v	nero55	3000Vb K	30°	0,8

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	28,4	2140	19,9	108	
xm007	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		



n55 system spot55x61 **IP20**

Vb6.594.17.27	my bianco	2700K	47°	0,9
Vb6.594.18.27	nero55	2700K	47°	0,9

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm000	les19 	Ta25 °C		vita media · average life		70000 h		180		B10

Vb6.594.17.30	my bianco	3000K	47°	0,9
Vb6.594.18.30	nero55	3000K	47°	0,9

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm001	les19 	Ta25 °C		vita media · average life		70000 h		180		B10

Vb6.594.17.30v	my bianco	3000Vb K	47°	0,9
Vb6.594.18.30v	nero55	3000Vb K	47°	0,9


Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	28,4	2140	19,9	108	A+
xm007	les19 	Ta25 °C		vita media · average life		70000 h		180		B10

accessori. accessories




Vb9.580.91	frangiluce nido d'ape · honeycomb louvre	0,01
Vb9.580.92	lente ellittica · elliptical lens	0,04



gradi di apertura fascio luminoso
beam's angle degrees



gradi di apertura fascio luminoso
beam's angle degrees



n55 system spot82x35

Vb6.594.21.27	my bianco	2700K	13°	0,7
Vb6.594.22.27	nero55	2700K	13°	0,7
Vb6.594.23.27	my bianco	2700K	19°	0,7
Vb6.594.24.27	nero55	2700K	19°	0,7

Ra	R9	ies tm-30		sdcm	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe000	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.21.30	my bianco	3000K	13°	0,7
Vb6.594.22.30	nero55	3000K	13°	0,7
Vb6.594.23.30	my bianco	3000K	19°	0,7
Vb6.594.24.30	nero55	3000K	19°	0,7




Ra	R9	ies tm-30		sdcm	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe001	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.21.30v	my bianco	3000Vb K	13°	0,7
Vb6.594.22.30v	nero55	3000Vb K	13°	0,7
Vb6.594.23.30v	my bianco	3000Vb K	19°	0,7
Vb6.594.24.30v	nero55	3000Vb K	19°	0,7

Ra	R9	ies tm-30		sdcm	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	27,9	1110	19,5	57	A
xe007	les9	Ta25 °C		vita media · average life		70000 h		L80 B10		



gradi di apertura fascio luminoso
beam's angle degrees



n55 system spot82x35



Vb6.594.37.27	my bianco	2700K	31°	0,7
Vb6.594.38.27	nero55	2700K	31°	0,7
Vb6.594.39.27	my bianco	2700K	42°	0,7
Vb6.594.40.27	nero55	2700K	42°	0,7


Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm000	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.37.30	my bianco	3000K	31°	0,7
Vb6.594.38.30	nero55	3000K	31°	0,7
Vb6.594.39.30	my bianco	3000K	42°	0,7
Vb6.594.40.30	nero55	3000K	42°	0,7

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm001	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.594.37.30v	my bianco	3000Vb K	31°	0,7
Vb6.594.38.30v	nero55	3000Vb K	31°	0,7
Vb6.594.39.30v	my bianco	3000Vb K	42°	0,7
Vb6.594.40.30v	nero55	3000Vb K	42°	0,7

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	28,4	2140	19,9	108	A+
xm007	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		



n55 system spot82x79



Vb6.594.31.27	my bianco	2700K	23°	0,8
Vb6.594.32.27	nero55	2700K	23°	0,8
Vb6.594.33.27	my bianco	2700K	37°	0,8
Vb6.594.34.27	nero55	2700K	37°	0,8
Vb6.594.35.27	my bianco	2700K	46°	0,8
Vb6.594.36.27	nero55	2700K	46°	0,8

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm000	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		




Vb6.594.31.30	my bianco	3000K	23°	0,8
Vb6.594.32.30	nero55	3000K	23°	0,8
Vb6.594.33.30	my bianco	3000K	37°	0,8
Vb6.594.34.30	nero55	3000K	37°	0,8
Vb6.594.35.30	my bianco	3000K	46°	0,8
Vb6.594.36.30	nero55	3000K	46°	0,8

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm001	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		


Vb6.594.31.30v	my bianco	3000Vb K	23°	0,8
Vb6.594.32.30v	nero55	3000Vb K	23°	0,8
Vb6.594.33.30v	my bianco	3000Vb K	37°	0,8
Vb6.594.34.30v	nero55	3000Vb K	37°	0,8
Vb6.594.35.30v	my bianco	3000Vb K	46°	0,8
Vb6.594.36.30v	nero55	3000Vb K	46°	0,8

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	28,4	2140	19,9	108	A+
xm007	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

gradi di apertura fascio luminoso
beam's angle degrees



accessori spot82. accessories.





Vb9.580.86 frangiluce nido d'ape · honeycomb louvre 0,01

Vb9.580.87 lente ellittica · elliptical lens 0,05

Vb9.580.88 vetro albarino · albarino glass 0,05


Vb9.580.165 anti abbagliamento · anti-glare 0,03

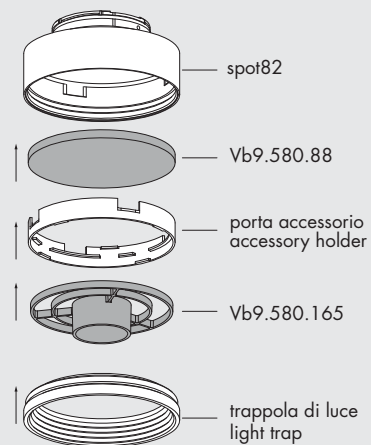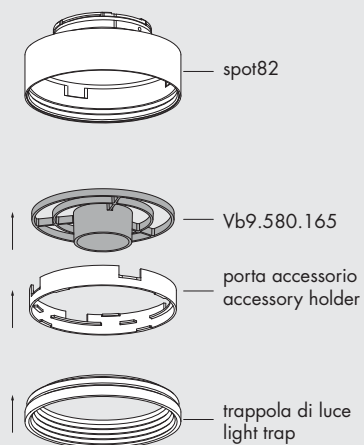




dimensioni gobos in acciaio

steel gobos size



dimensioni gobos in vetro

glass gobos size



n55 system spot sagomatore



Vb6.594.50.27

nero55

2700K

1

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm000	les19	●	Ta25 °C	vita media · average life		70000 h		L80 B10		

Vb6.594.50.30

nero55

3000K

1

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm001	les19	●	Ta25 °C	vita media · average life		70000 h		L80 B10		

accessori spot sagomatore. accessories.



Vb9.580.118

gruppo per alloggiamento gobo in vetro

housing for glass gobos

0,1


Vb9.580.119

gruppo per alloggiamento gobo in acciaio

housing for steel gobos


0,1

propulsore dinamico 65/700

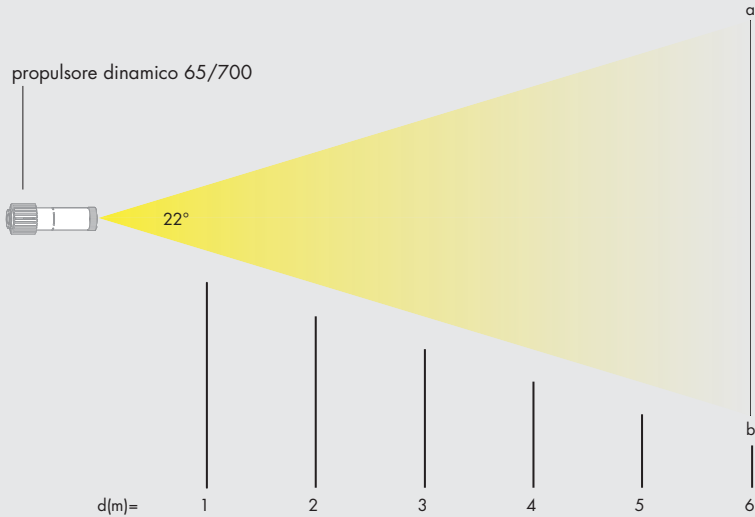


d (m)	ab (m)	e _{max} (lx)	e _{med} (lx)
1	0,38	1970	1622
2	0,76	492	405
3	1,14	219	181
4	1,51	124	101
5	1,89	79	65
6	2,27	55	45


montaggio su propulsore dinamico n55
propeller mounting

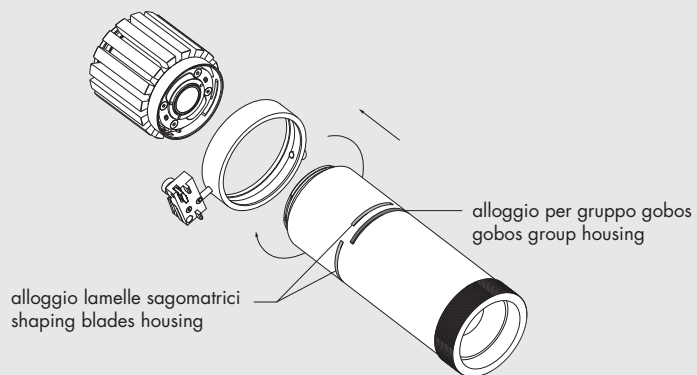



uso delle lamelle sagomatrici · use of shaping blades

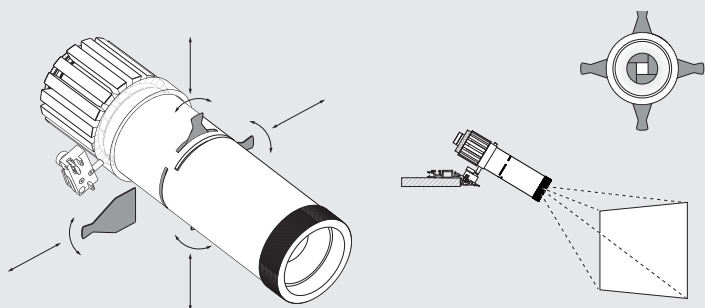


gobo in vetro non incluso
glass gobos not included

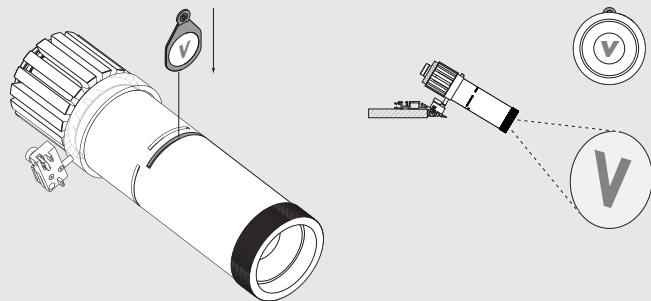




messa a fuoco · focus

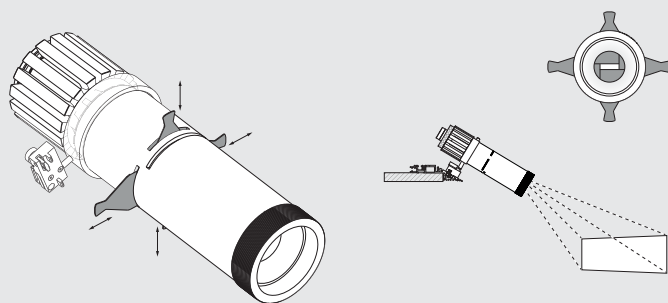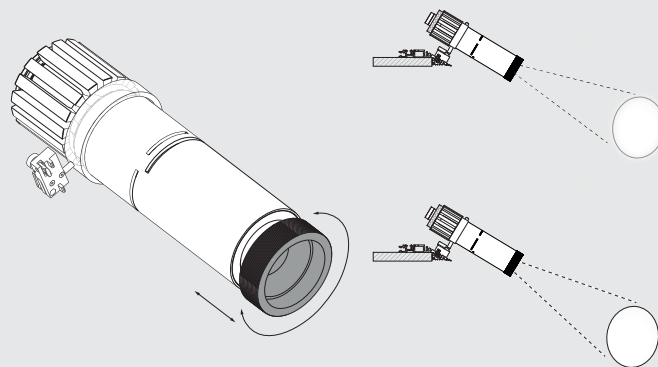

gobo in acciaio non incluso
steel gobos not included

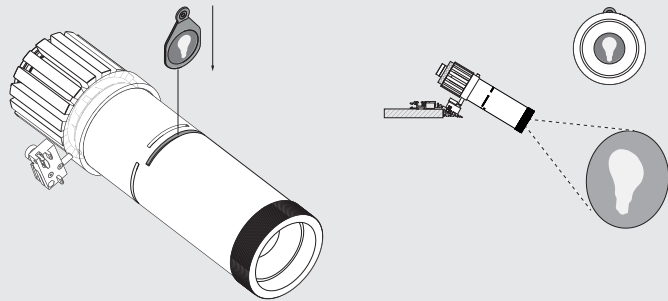

gradi di apertura fascio luminoso
beam's angle degrees



econo system



IP20



Vb6.595.11.27	bianco V	2700K	15°	0,8
Vb6.595.12.27	nero55	2700K	15°	0,8
Vb6.595.13.27	argento hacca	2700K	15°	0,8
Vb6.595.14.27	bianco V	2700K	25°	0,8
Vb6.595.15.27	nero55	2700K	25°	0,8
Vb6.595.16.27	argento hacca	2700K	25°	0,8
Vb6.595.17.27	bianco V	2700K	33°	0,8
Vb6.595.18.27	nero55	2700K	33°	0,8
Vb6.595.19.27	argento hacca	2700K	33°	0,8

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	500	33,6	2062	16,8	123	A++
				700	34,5	2776	24,2	115	A+
ci010	Ta25 °C		vita media · average life				50000 h	L80	B10

Vb6.595.11.30	bianco V	3000K	15°	0,8
Vb6.595.12.30	nero55	3000K	15°	0,8
Vb6.595.13.30	argento hacca	3000K	15°	0,8
Vb6.595.14.30	bianco V	3000K	25°	0,8
Vb6.595.15.30	nero55	3000K	25°	0,8
Vb6.595.16.30	argento hacca	3000K	25°	0,8
Vb6.595.17.30	bianco V	3000K	33°	0,8
Vb6.595.18.30	nero55	3000K	33°	0,8
Vb6.595.19.30	argento hacca	3000K	33°	0,8

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	500	33,6	2217	16,8	132	A++
				700	34,5	2984	24,2	123	A++
ci011	les14 	Ta25 °C		vita media · average life		50000 h	L80 B10		




Vb6.595.11.32v	bianco V	3200Vb K	15°	0,8
Vb6.595.12.32v	nero55	3200Vb K	15°	0,8
Vb6.595.13.32v	argento hacca	3200Vb K	15°	0,8

Ra	R9	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	91	Rf 90	Rg 110	step 2	500	33,0	1510	17,9	84	A+
					700	34,0	1990	25,9	77	A+
tf002	les11	Ta25 °C		vita media · average life		50000 h		L80 B10		

Vb6.595.14.32v	bianco V	3200Vb K	25°	0,8
Vb6.595.15.32v	nero55	3200Vb K	25°	0,8
Vb6.595.16.32v	argento hacca	3200Vb K	25°	0,8
Vb6.595.17.32v	bianco V	3200Vb K	33°	0,8
Vb6.595.18.32v	nero55	3200Vb K	33°	0,8
Vb6.595.19.32v	argento hacca	3200Vb K	33°	0,8


Ra	R9	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	91	Rf 90	Rg 110	step 2	500	33,2	1690	17,8	95	A+
					600	34,0	1970	21,5	92	A+
					700	35,0	2230	26,3	85	A+
ti002	les15	Ta25 °C		vita media · average life		50000 h		L80 B10		







linea di luce continua wallwasher	24Vdc			IP20				
--	--------------	--	--	-------------	--	--	--	--

Vb6.095.01.30	3000K	13W	500mm	0,8
Vb6.095.02.30	3000K	26W	1000mm	0,8
Vb6.095.03.30	3000K	52W	2000mm	0,8

Ra	R9	ies tm-30		sdcn	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	A+
V3001	11	Ta25 °C		vita media · average life		50000 h		L80 B10	



gradi di apertura fascio luminoso
beam's angle degrees



eco mini system

IP20

Vb6.579.33.27.01 my bianco 2700K 13° 0,4

Vb6.579.34.27.01 nero55 2700K 13° 0,4

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	17	422	6	70	A+	
				500	17,3	583	8,7	67	A	
				700	17,8	767	12,4	62	A	
cd010	Ta25 °C		vita media · average life		50000 h		L70 B10			


Vb6.579.36.27.01 my bianco 2700K 19° 0,4

Vb6.579.31.27.01 nero55 2700K 19° 0,4

Vb6.579.37.27.01 my bianco 2700K 36° 0,4

Vb6.579.32.27.01 nero55 2700K 36° 0,4

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	33,9	1209	12	101	A+
				500	34,8	1680	17,4	97	A+
ci000	Ta25 °C		vita media · average life		50000 h	L70 B10			



Vb6.579.33.30.01	my bianco	3000K	13°	0,4
Vb6.579.34.30.01	nero55	3000K	13°	0,4

Ra		ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	17	455	6	76	A+	
				500	17,3	628	8,7	72	A	
				700	17,8	826	12,4	66	A	
cd011	les6 	Ta25 °C		vita media · average life		50000 h	L70	B10		

Vb6.579.36.30.01	my bianco	3000K	19°	0,4
Vb6.579.31.30.01	nero55	3000K	19°	0,4
Vb6.579.37.30.01	my bianco	3000K	36°	0,4
Vb6.579.32.30.01	nero55	3000K	36°	0,4

Ra		ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	33,9	1293	12	108	A+	
				500	34,8	1796	17,4	103	A+	
ci001	les14 	Ta25 °C		vita media · average life	50000 h		L70	B10		




accessori eco mini system. accessories.







Vb9.580.91	frangiluce nido d'ape · honeycomb louvre	0,01
Vb9.580.92	lente ellittica · elliptical lens	0,04
f9.001.57	filtro ir trasparente · transparent ir filter	0,04
f9.001.59	vetro sabbiaio · frosted glass	0,04



gradi di apertura fascio luminoso
beam's angle degrees



gradi di apertura fascio luminoso
beam's angle degrees



eco system				IP20				
------------	--	--	--	------	--	--	--	--

Vb6.030.11.27.02 my bianco 2700K 12° 0,8

Vb6.030.01.27.02 nero55 2700K 12° 0,8

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,1	800	13,6	59	A
					700	27,9	1110	19,5	57	A
					1050	28,8	1560	30,2	52	A
xe000	les9 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb6.030.12.27.02 my bianco 2700K 26° 0,8

Vb6.030.02.27.02 nero55 2700K 26° 0,8


Vb6.030.13.27.02 my bianco 2700K 36° 0,8

Vb6.030.03.27.02 nero55 2700K 36° 0,8

Vb6.030.14.27.02 my bianco 2700K 54° 0,8

Vb6.030.04.27.02 nero55 2700K 54° 0,8

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
					500	27,9	1580	14,0	113	A+
					700	28,4	2140	19,9	108	A+
					1050	29,0	3000	30,5	98	A+
xm000	les19 	Ta25 °C		vita media · average life			70000 h		L80 B10	



Vb6.030.11.30.02	my bianco	3000K	12°	0,8
Vb6.030.01.30.02	nero55	3000K	12°	0,8







Ra	R9	ies tm-30		sdcn	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,1	800	13,6	59	A
					700	27,9	1110	19,5	57	A
					1050	28,8	1560	30,2	52	A
xe001	Ta25 °C		vita media · average life			70000 h		L80 B10		

Vb6.030.12.30.02	my bianco	3000K	26°	0,8
Vb6.030.02.30.02	nero55	3000K	26°	0,8
Vb6.030.13.30.02	my bianco	3000K	36°	0,8
Vb6.030.03.30.02	nero55	3000K	36°	0,8
Vb6.030.14.30.02	my bianco	3000K	54°	0,8
Vb6.030.04.30.02	nero55	3000K	54°	0,8

Ra	R9	ies tm-30		sdcn	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
					500	27,9	1580	14,0	113	A+
					700	28,4	2140	19,9	108	A+
					1050	29,0	3000	30,5	98	A+
xm001	Ta25 °C		vita media · average life			70000 h		L80 B10		



gradi di apertura fascio luminoso
beam's angle degrees



eco system IP20

Vb6.030.11.30v.02	my bianco	3000Vb K	12°	0,8
Vb6.030.01.30v.02	nero55	3000Vb K	12°	0,8

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,1	800	13,6	59	A
					700	27,9	1110	19,5	57	A
					1050	28,8	1560	30,2	52	A
xe007	les9 	Ta25 °C		vita media · average life		70000 h		L80 B10		


Vb6.030.12.30v.02	my bianco	3000Vb K	26°	0,8
Vb6.030.02.30v.02	nero55	3000Vb K	26°	0,8
Vb6.030.13.30v.02	my bianco	3000Vb K	36°	0,8
Vb6.030.03.30v.02	nero55	3000Vb K	36°	
Vb6.030.14.30v.02	my bianco	3000Vb K	54°	0,8
Vb6.030.04.30v.02	nero55	3000Vb K	54°	0,8

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	27,6	1240	9,7	128	A++
					500	27,9	1580	14,0	113	A+
					700	28,4	2140	19,9	108	A+
					1050	29,0	3000	30,5	98	A+
xm007	les19 			Ta25 °C		vita media · average life		70000 h		L80 B10



otiche eco system. optics. ☆ C€ ⓘ

Vb9.030.92 les19 26° 0,1



Vb9.030.93 les19 36° 0,1



Vb9.030.94 les19 54° 0,1



accessori eco system. accessories. ☆ C€ ⓘ


Vb9.580.86 frangiluce nido d'ape · honeycomb louvre 0,01



Vb9.580.87 lente ellittica · elliptical lens 0,05



Vb9.580.88 vetro albarino · albarino glass 0,05





kit supporto luce lineare













Vb9.094.90 agganci orientabili · adjustable hooks 2 pz · pcs 0,1

Vb9.094.91 agganci fissi · fixed hooks 2 pz · pcs 0,1

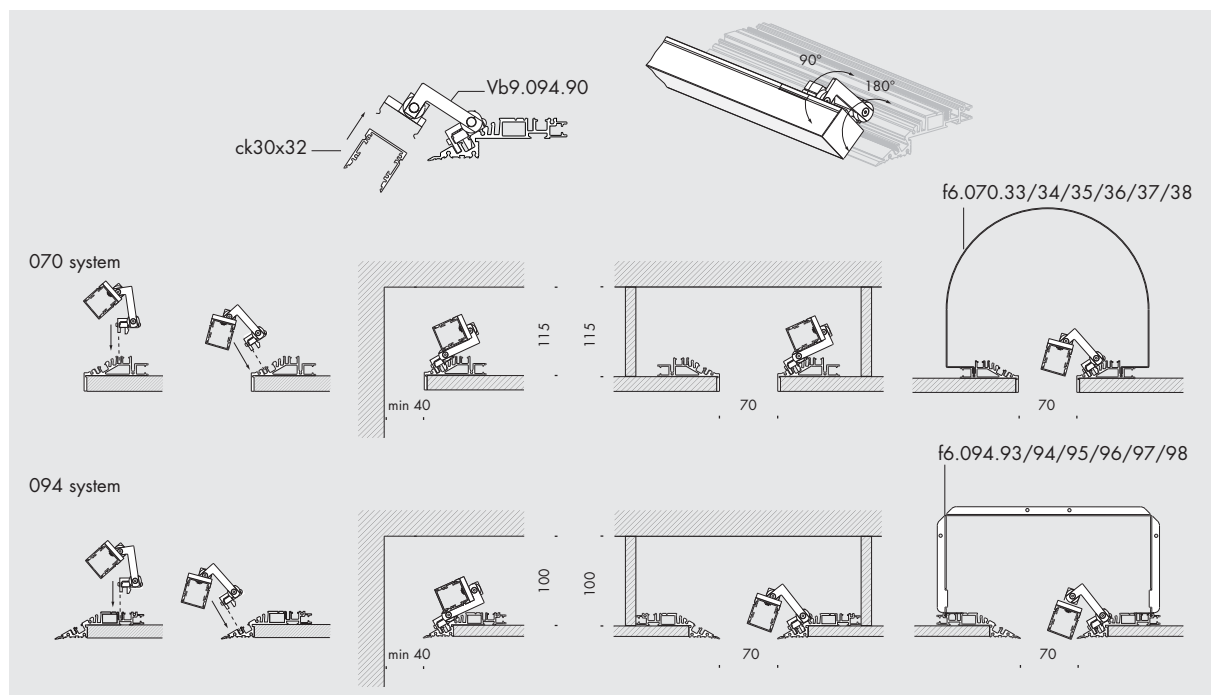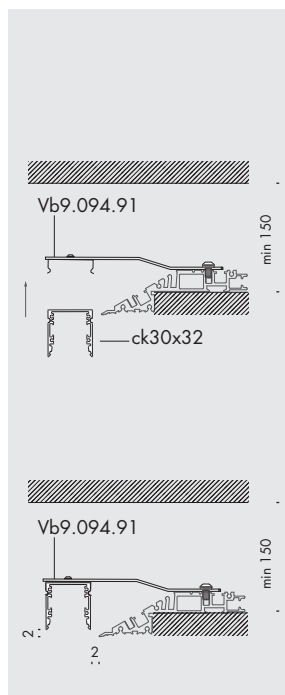



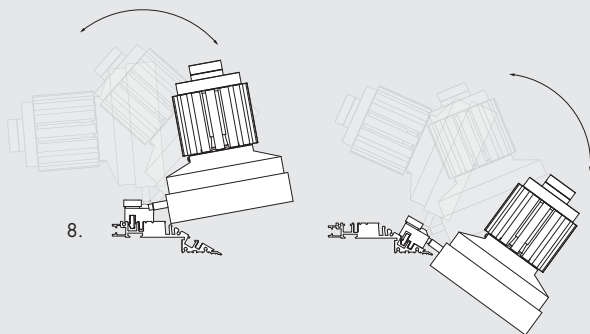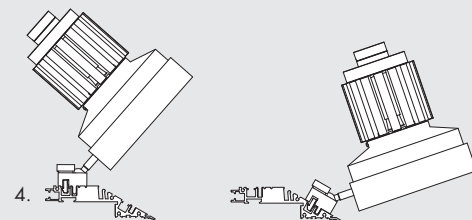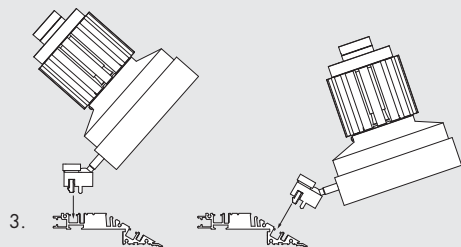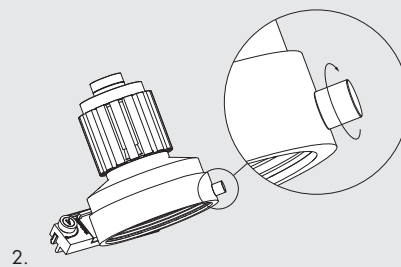





lampadine decorative
decorative bulbs





lampadine tecniche
technical bulbs

1. scegli l'anello
choose the ring


2. scegli l'interfaccia
choose the interface

3. scegli il propulsore dinamico n55
choose the propulsore dinamico n55

4. scegli la tua lampadina classica, decorativa e tecnica
choose your classic, decorative and technical bulb



anelli con interfaccia n55 system. rings with interface.			☆	CE	i
Vb9.594.91	nero55	Ø55			0,1
Vb9.594.92	my bianco	Ø55			0,1
Vb9.594.93	nero55	Ø82			0,1
Vb9.594.94	my bianco	Ø82			0,1
Vb9.594.95	nero55	Ø100			0,1
Vb9.594.96	my bianco	Ø100			0,1



propulsore dinamico 55/350e

 IP20

Vb9.580.150.27	argento hacca	2700K	les19 	0,2
Vb9.580.151.27	nero55	2700K	les19 	0,2
Vb9.580.152.27	my bianco	2700K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
xm000	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.150.30	argento hacca	3000K	les19 	0,2
Vb9.580.151.30	nero55	3000K	les19 	0,2
Vb9.580.152.30	my bianco	3000K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
xm001	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.150.30v	argento hacca	3000Vb K	les19 	0,2
Vb9.580.151.30v	nero55	3000Vb K	les19 	0,2
Vb9.580.152.30v	my bianco	3000Vb K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	27,6	1240	9,7	128	A++
xm007	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		



propulsore dinamico 55/350

 IP20

Vb9.580.50.27	argento hacca	2700K	les19 	0,2
Vb9.580.51.27	nero55	2700K	les19 	0,2
Vb9.580.52.27	my bianco	2700K	les19 	0,2


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
xm000		les19 	Ta25 °C		vita media · average life			70000 h	L80	B10

Vb9.580.50.30	argento hacca	3000K	les19 	0,2
Vb9.580.51.30	nero55	3000K	les19 	0,2
Vb9.580.52.30	my bianco	3000K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	350	27,6	1240	9,7	128	A++
xm001		les19 	Ta25 °C		vita media · average life			70000 h	L80	B10

Vb9.580.50.30v	argento hacca	3000VbK	les19 	0,2
Vb9.580.51.30v	nero55	3000VbK	les19 	0,2
Vb9.580.52.30v	my bianco	3000VbK	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	350	27,6	1240	9,7	128	A++
xm007		les19 	Ta25 °C		vita media · average life			70000 h	L80	B10



propulsore dinamico 55/500

 IP20

Vb9.580.62.27	argento hacca	2700K	les19 	0,2
Vb9.580.63.27	nero55	2700K	les19 	0,2
Vb9.580.64.27	my bianco	2700K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm000	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.62.30	argento hacca	3000K	les19 	0,2
Vb9.580.63.30	nero55	3000K	les19 	0,2
Vb9.580.64.30	my bianco	3000K	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm001	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.62.30v	argento hacca	3000VbK	les19 	0,2
Vb9.580.63.30v	nero55	3000VbK	les19 	0,2
Vb9.580.64.30v	my bianco	3000VbK	les19 	0,2

Ra	R9	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,9	1580	14,0	113	A+
xm007	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		



propulsore dinamico 55/500

 IP20

Vb9.580.101.27	argento hacca	2700K	les9 	0,2
Vb9.580.102.27	nero55	2700K	les9 	0,2
Vb9.580.103.27	my bianco	2700K	les9 	0,2


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,1	800	13,6	59	A
xe000		les9 	Ta25 °C	vita media · average life				70000 h	L80	B10

Vb9.580.101.30	argento hacca	3000K	les9 	0,2
Vb9.580.102.30	nero55	3000K	les9 	0,2
Vb9.580.103.30	my bianco	3000K	les9 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,1	800	13,6	59	A
xe001		les9 	Ta25 °C	vita media · average life				70000 h	L80	B10

Vb9.580.101.30v	argento hacca	3000VbK	les9 	0,2
Vb9.580.102.30v	nero55	3000VbK	les9 	0,2
Vb9.580.103.30v	my bianco	3000VbK	les9 	0,2

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,1	800	13,6	59	A
xe007		les9 	Ta25 °C	vita media · average life				70000 h	L80	B10



propulsore dinamico 65/500e **IP20**

Vb9.580.154.27	argento hacca	2700K	les19 	0,3
Vb9.580.155.27	nero55	2700K	les19 	0,3
Vb9.580.156.27	my bianco	2700K	les19 	0,3


Ra	R9	ies tm-30		sdcn	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm000	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.154.30	argento hacca	3000K	les19 	0,3
Vb9.580.155.30	nero55	3000K	les19 	0,3
Vb9.580.156.30	my bianco	3000K	les19 	0,3

Ra	R9	ies tm-30		sdcn	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	500	27,9	1580	14,0	113	A+
xm001	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.154.30v	argento hacca	3000VbK	les19 	0,3
Vb9.580.155.30v	nero55	3000VbK	les19 	0,3
Vb9.580.156.30v	my bianco	3000VbK	les19 	0,3

Ra	R9	ies tm-30		sdcn	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	500	27,9	1580	14,0	113	A+
xm007	les19 	Ta25 °C		vita media · average life		70000 h		L80 B10		



propulsore dinamico 65/700

 IP20

Vb9.580.54.27	argento hacca	2700K	les19 	0,3
Vb9.580.55.27	nero55	2700K	les19 	0,3
Vb9.580.56.27	my bianco	2700K	les19 	0,3

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm000	les19 	Ta25 °C		vita media · average life				70000 h	L80	B10

Vb9.580.54.30	argento hacca	3000K	les19 	0,3
Vb9.580.55.30	nero55	3000K	les19 	0,3
Vb9.580.56.30	my bianco	3000K	les19 	0,3

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	28,4	2140	19,9	108	A+
xm001	les19 	Ta25 °C		vita media · average life				70000 h	L80	B10

Vb9.580.54.30v	argento hacca	3000VbK	les19 	0,3
Vb9.580.55.30v	nero55	3000VbK	les19 	0,3
Vb9.580.56.30v	my bianco	3000VbK	les19 	0,3

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	28,4	2140	19,9	108	A+
xm007	les19 	Ta25 °C		vita media · average life				70000 h	L80	B10



propulsore dinamico 65/700

 IP20

Vb9.580.106.27	argento hacca	2700K	les9 	0,3
Vb9.580.107.27	nero55	2700K	les9 	0,3
Vb9.580.108.27	my bianco	2700K	les9 	0,3


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe000	les9 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.106.30	argento hacca	3000K	les9 	0,3
Vb9.580.107.30	nero55	3000K	les9 	0,3
Vb9.580.108.30	my bianco	3000K	les9 	0,3

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	700	27,9	1110	19,5	57	A
xe001	les9 	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.106.30v	argento hacca	3000Vb K	les9 	0,3
Vb9.580.107.30v	nero55	3000Vb K	les9 	0,3
Vb9.580.108.30v	my bianco	3000Vb K	les9 	0,3

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	700	27,9	1110	19,5	57	A
xe007	les9 	Ta25 °C		vita media · average life		70000 h		L80 B10		



propulsore dinamico 82/1050			IP20			
Vb9.580.58.27	argento hacca	2700K	les19	0,5		
Vb9.580.59.27	nero55	2700K	les19	0,5		
Vb9.580.60.27	my bianco	2700K	les19	0,5		


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	1050	29,0	3000	30,5	98	A+
xm000	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.58.30	argento hacca	3000K	les19	0,5		
Vb9.580.59.30	nero55	3000K	les19	0,5		
Vb9.580.60.30	my bianco	3000K	les19	0,5		


Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	1050	29,0	3000	30,5	98	A+
xm001	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		

Vb9.580.58.30v	argento hacca	3000VbK	les19	0,5		
Vb9.580.59.30v	nero55	3000VbK	les19	0,5		
Vb9.580.60.30v	my bianco	3000VbK	les19	0,5		

Ra	R9	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
98	98	Rf 93	Rg 106	step 1	1050	29,0	3000	30,5	98	A+
xm007	les19	Ta25 °C		vita media · average life		70000 h		L80 B10		




spot55x37		★	CE	i
Vb9.580.121	argento hacca	18° les9 ●		0,1
Vb9.580.122	nero55	18° les9 ●		0,1
Vb9.580.122.b	my bianco	18° les9 ●		0,1
Vb9.580.123	argento hacca	23° les9 ●	30° les19 ●	0,1
Vb9.580.124	nero55	23° les9 ●	30° les19 ●	0,1
Vb9.580.124.b	my bianco	23° les9 ●	30° les19 ●	0,1
Vb9.580.125	argento hacca	36° les9 ●	38° les19 ●	0,1
Vb9.580.126	nero55	36° les9 ●	38° les19 ●	0,1
Vb9.580.126.b	my bianco	36° les9 ●	38° les19 ●	0,1




spot55x61		★	CE	i
Vb9.580.25	argento hacca	36° les19 ●		0,2
Vb9.580.26	nero55	36° les19 ●		0,2
Vb9.580.26.b	my bianco	36° les19 ●		0,2
Vb9.580.27	argento haccac	47° les19 ●		0,2
Vb9.580.28	nero55	47° les19 ●		0,2
Vb9.580.28.b	my bianco	47° les19 ●		0,2



accessori spot55. accessories.		★	CE	i
Vb9.580.91	frangiluce nido d'ape · honeycomb louvre			0,01
Vb9.580.92	lente ellittica · elliptical lens			0,04




spot82x35		★	CE	i
Vb9.580.131	argento hacca	13° les9 ●		0,1
Vb9.580.132	nero55	13° les9 ●		0,1
Vb9.580.137	my bianco	13° les9 ●		0,1
Vb9.580.133	argento hacca	19° les9 ●		0,1
Vb9.580.134	nero55	19° les9 ●		0,1
Vb9.580.138	my bianco	19° les9 ●		0,1
Vb9.580.135	argento hacca	23° les9 ●	31° les19 ●	0,1
Vb9.580.136	nero55	23° les9 ●	31° les19 ●	0,1
Vb9.580.141	my bianco	23° les9 ●	31° les19 ●	0,1
Vb9.580.139	argento hacca	35° les9 ●	42° les19 ●	0,1
Vb9.580.140	nero55	35° les9 ●	42° les19 ●	0,1
Vb9.580.142	my bianco	35° les9 ●	42° les19 ●	0,1



spot82x79		★	CE	i
Vb9.580.31	argento hacca	23° les19 ●		0,2
Vb9.580.32	nero55	23° les19 ●		0,2
Vb9.580.32.b	my bianco	23° les19 ●		0,2
Vb9.580.33	argento hacca	37° les19 ●		0,2
Vb9.580.34	nero55	37° les19 ●		0,2
Vb9.580.34.b	my bianco	37° les19 ●		0,2
Vb9.580.35	argento hacca	46° les19 ●		0,2
Vb9.580.36	nero55	46° les19 ●		0,2
Vb9.580.36.b	my bianco	46° les19 ●		0,2

accessori spot82. accessories.






Vb9.580.86 frangiluce nido d'ape · honeycomb louvre 0,01

Vb9.580.87 lente ellittica · elliptical lens 0,05

Vb9.580.88 vetro albarino · albarino glass 0,05

Vb9.580.165 anti abbagliamento · anti-glare 0,03

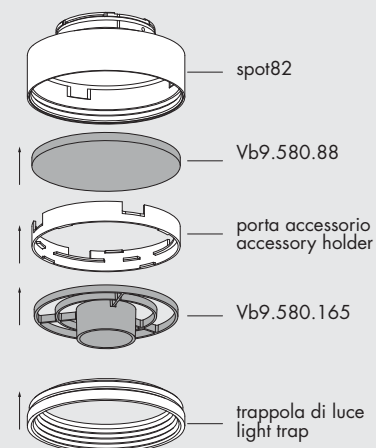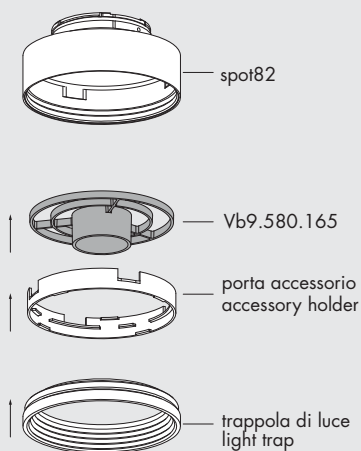




spot100		★	CE	i
Vb9.580.37	argento hacca	10° les9 ●	16° les19 ●	0,1
Vb9.580.38	nero55	10° les9 ●	16° les19 ●	0,1
Vb9.580.38.b	my bianco	10° les9 ●	16° les19 ●	0,1
Vb9.580.39	argento hacca	22° les9 ●	25° les19 ●	0,1
Vb9.580.40	nero55	22° les9 ●	25° les19 ●	0,1
Vb9.580.40.b	my bianco	22° les9 ●	25° les19 ●	0,1
Vb9.580.41	argento hacca		40° les19 ●	0,1
Vb9.580.42	nero55		40° les19 ●	0,1
Vb9.580.42.b	my bianco		40° les19 ●	0,1
Vb9.580.43	argento hacca		54° les19 ●	0,1
Vb9.580.44	nero55		54° les19 ●	0,1
Vb9.580.44.b	my bianco		54° les19 ●	0,1



accessori spot100. accessories.		★	CE	i
Vb9.580.93	frangiluce nido d'ape · honeycomb louvre			0,01
Vb9.580.94	lente ellittica · elliptical lens			0,05



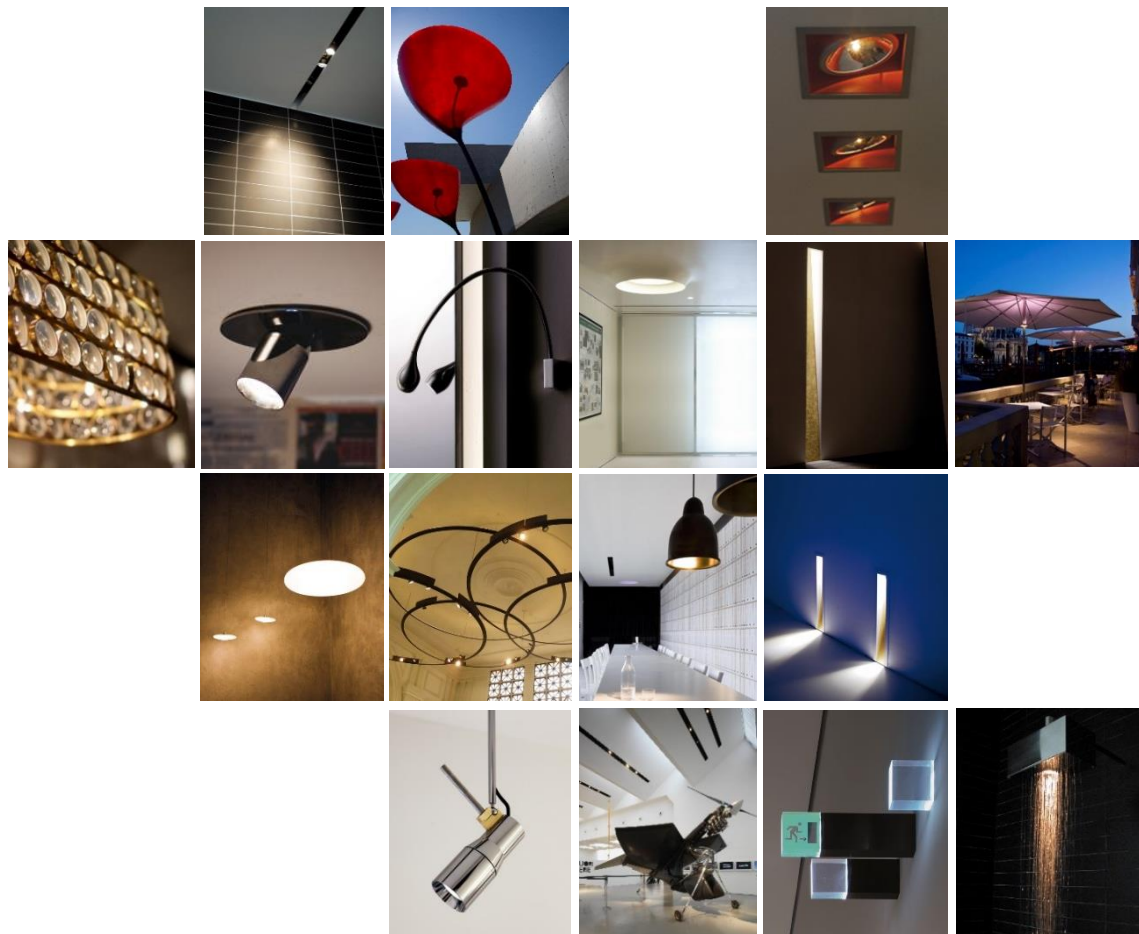

Contact Us

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

