



apparecchio di illuminazione a soffitto per interni IP20. realizzato con due profili in ottone calandrato di sezione 10x3mm che creano un binario elettrificato per alimentare le sorgenti elettroniche a luce diffusa, completo di diffusori diametro Ø60mm in vetro sabbiato e cristallo.

modelli:

royal chandelier 01 ellittico 1930x800mm, con sei cavi di sospensione in ottone naturale, luce diretta e luce indiretta 44x2,5W 10560lm,

royal chandelier 02 diametro Ø1750mm, con sei cavi di sospensione in ottone naturale, luce diretta e luce indiretta 60x2,5W 14200lm,

royal chandelier 03 diametro Ø2200mm, con quattro tige diametro Ø22mm 1350mm, luce diretta 100W 9600lm.

cablato con sorgente elettronica 2700K Ra95. alimentatore in tensione costante 24Vdc escluso, da installare remoto.

accessori: rosoni incasso e soffitto in ottone naturale, disponibili anche con alimentatore 240V 50-60Hz integrato, kit di bloccacavi ad incasso per scomparsa totale.

finiture: ottone naturale e acciaio verniciato per modelli royal chandelier 01 e royal chandelier 02, copper bronze solo per modello royal chandelier 03.

IP20 rated ceiling light fitting for indoor use. made of two calendered brass profiles having a 10x3 mm section that create an electrified track to power the diffused light led sources, complete with sanded glass and crystal diffusers having a diameter Ø60mm.

versions:

royal chandelier 01 elliptical version 1930x800mm equipped with six natural brass suspension cables with 44x2.5W 10560lm direct and indirect light,

royal chandelier 02 diameter Ø1750mm equipped with six natural brass suspension cables with 60x2.5W 14200lm direct and indirect light,


royal chandelier 03 diameter Ø2200mm with four diameter Ø22mm 1350mm rods and 100W 9600lm direct light.

wired with 2700K Ra95 led sources.

24Vdc constant voltage power supply not included, to be installed remotely.

accessories: natural brass roses for recessed and ceiling installation, also available with 240V 50-60Hz integrated power supply, recessed fixing kit for cables to fully conceal.

finishes: natural brass and painted steel for royal chandelier 01 and royal chandelier 02 copper bronze only for royal chandelier 03.

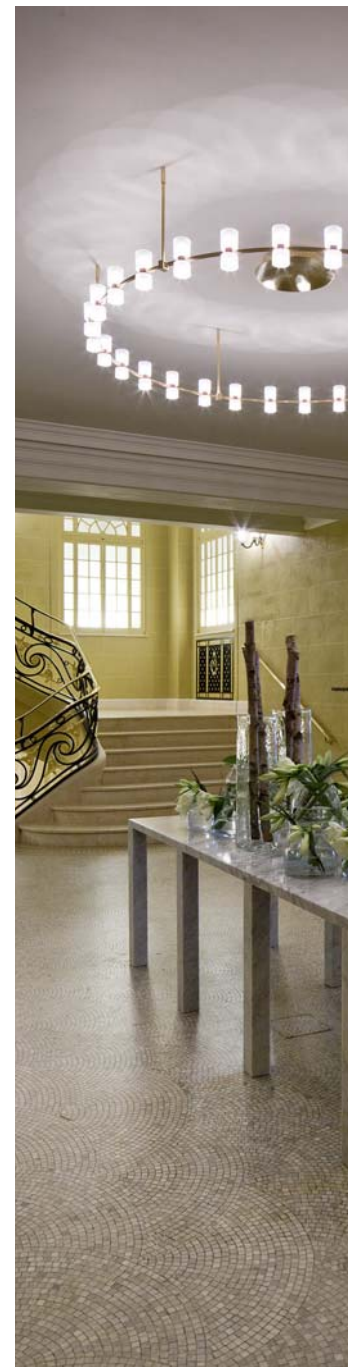

royal chandelier 01

24Vdc



IP20



CE

**Vb8.575.31** ottone naturale e vetro sabbato
natural brass and sanded glass2700K l.d. 22x2,5W 15
l.i. 22x2,5W**I.d. (luce diretta - direct light)**

Ra	R9	ies tm/30		sdcn	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	5280	55	96	A++
Vy010-22	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

I.i. (luce indiretta - indirect light)

Ra	R9	ies tm/30		sdcn	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	5280	55	96	A++
Vy010-22	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

rosone di alimentazione. ceiling rose. 240V 50-60Hz

CE

**a9.532.95** rosone incasso ottone naturale
con alimentatore dimmer dali/pulsante/1-10V
natural brass rose recessed
with dimmer dali power supply/button/1-10V

120W 2,8

a9.532.96 rosone soffitto ottone naturale
con alimentatore dimmer dali/pulsante/1-10V
natural brass ceiling rose
with dimmer dali power supply/button/1-10V






120W 5,5





accessori. accessories.

★ CE

**a9.532.84** kit di fissaggio cavi incasso per scomparsa totale
fixing kits for cable for recessed installing

0,5

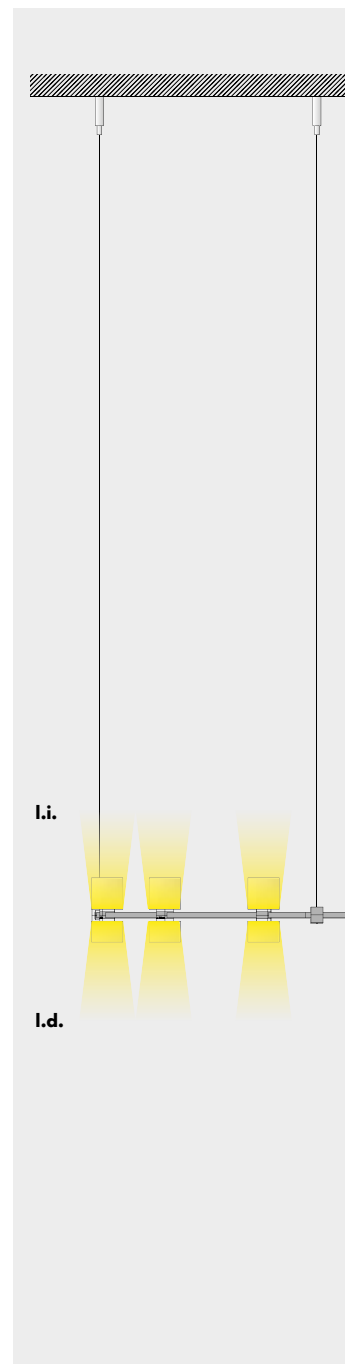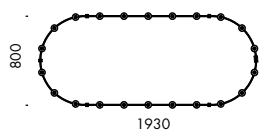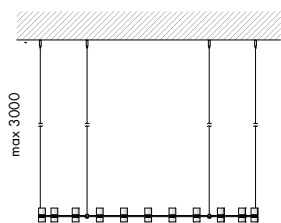

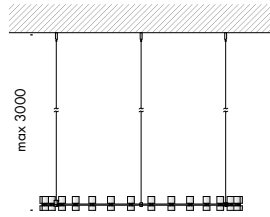

royal chandelier 02

24Vdc



IP20



CE



Vb8.575.41 ottone naturale e vetro sabbato 2700K l.d. 30x2,5W 12
 natural brass and sandblasted glass l.i. 30x2,5W

I.d. (luce diretta - direct light)

Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	7200	75	96	A++
Vy010-30	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

I.i. (luce indiretta - indirect light)

Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	7200	75	96	A++
Vy010-30	les16	Ta25 °C		vita media · average life		50000 h	L80	B10	

rosoni di alimentazione. ceiling roses.



★





CE



a9.532.91 rosone incasso cartongesso ottone naturale 2,8
 natural brass recessed plasterboard ceiling rose


a9.532.92 rosone soffitto ottone naturale 5,5
 natural brass ceiling rose

a9.532.84 kit di fissaggio cavi per scomparsa totale 0,5
 cable fixing kits for fully concealed installation

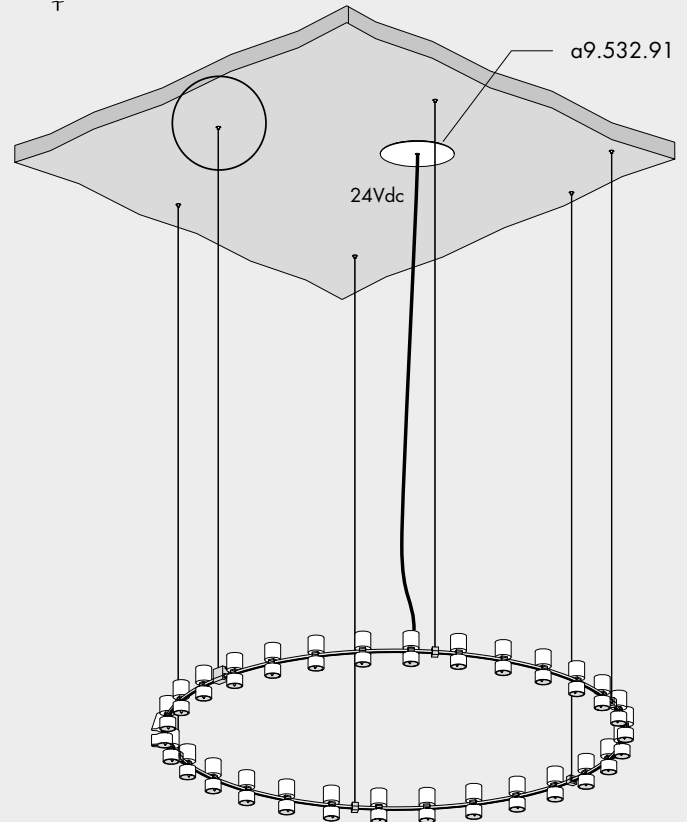
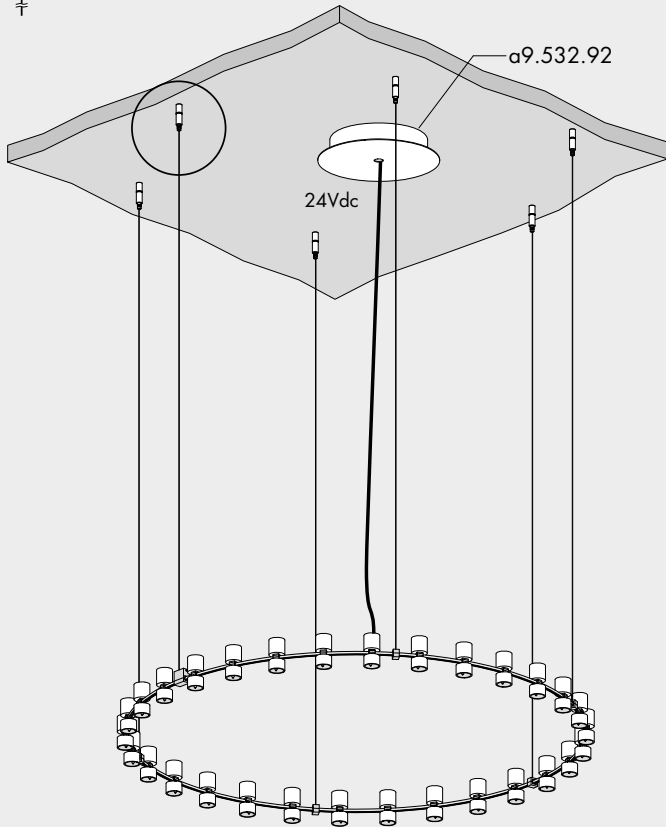
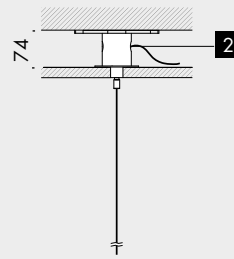



1 kit di fissaggio a soffitto inclusi
ceiling fixing kit included

2 a9.532.84 kit di fissaggio cavi a scomparsa totale non incluso
fully concealed fixing kit not included

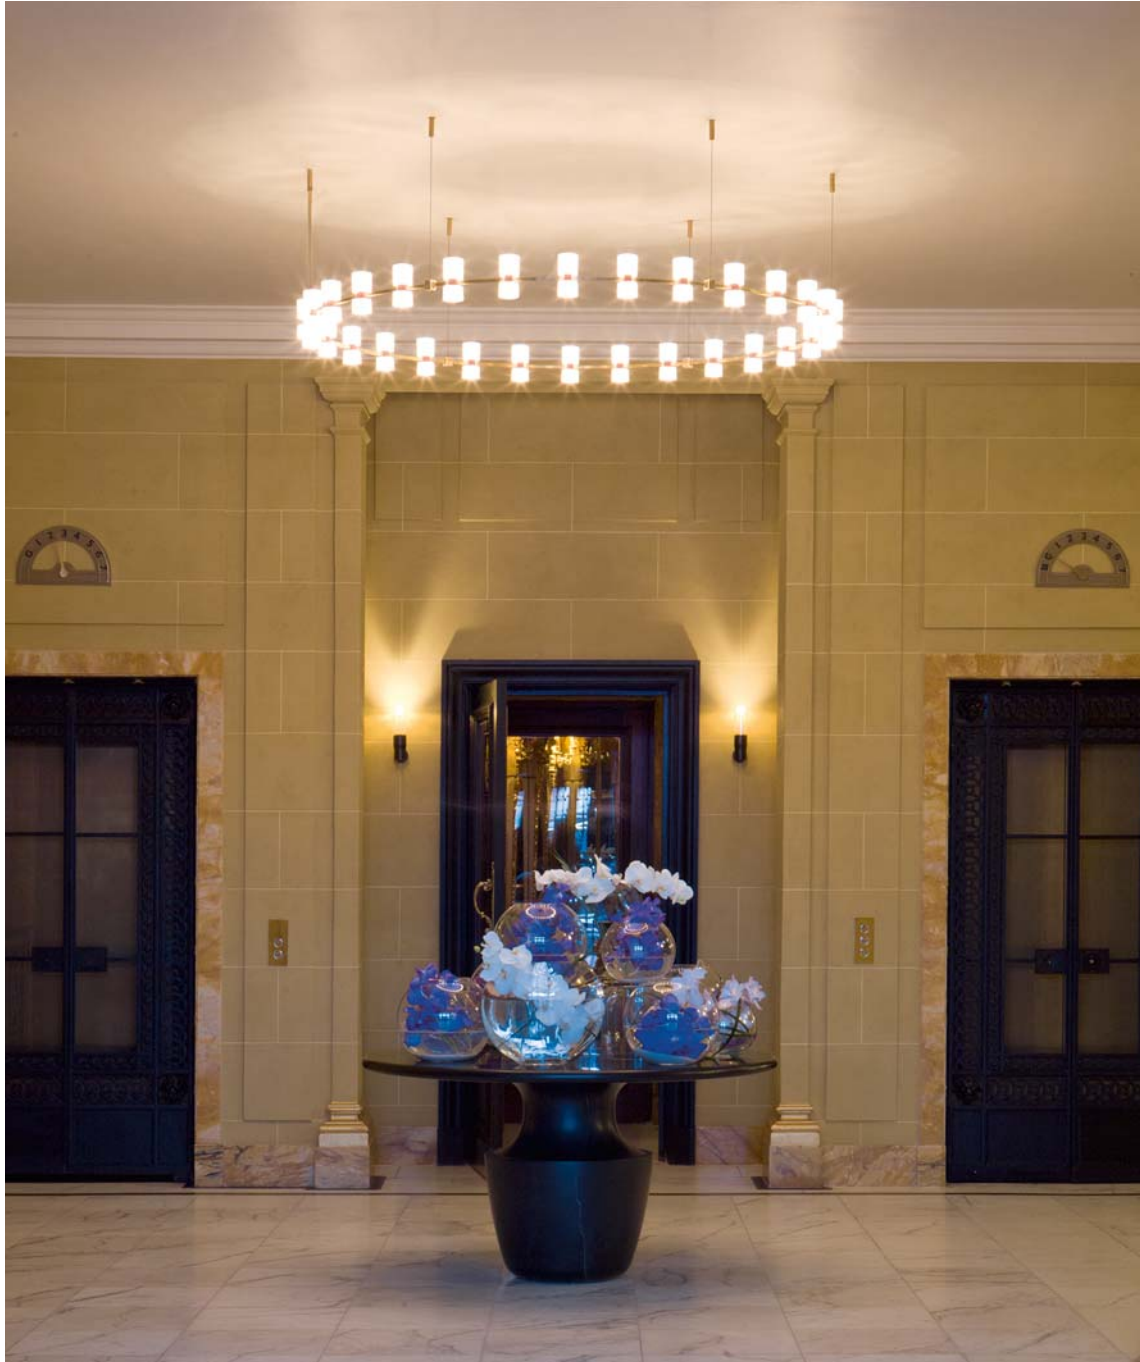



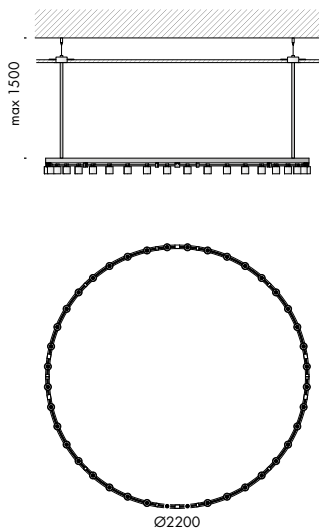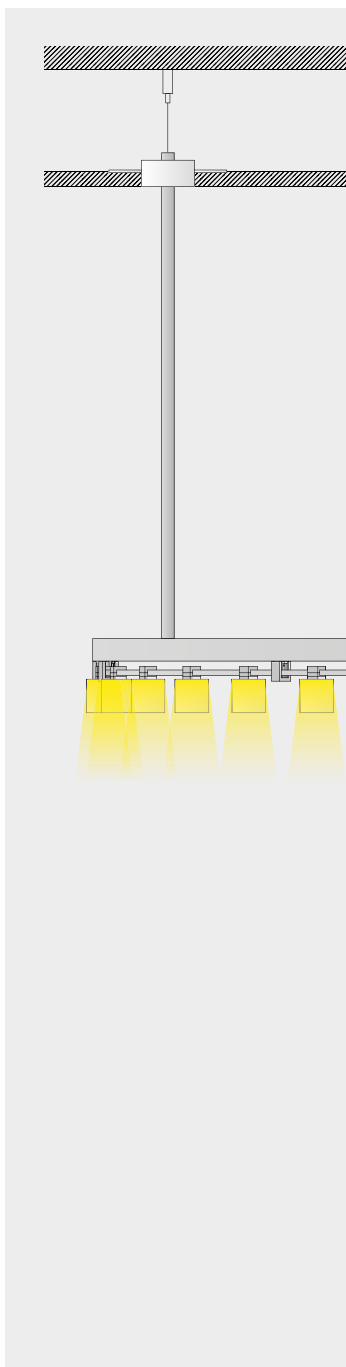



royal chandelier 03 24Vdc   IP20   CE 

Vb8.575.21 acciaio verniciato copper bronze 2700K 40x2,5W 28
e vetro sabbato
painted steel copper bronze
and sandblasted glass


Ra	R9	ies tm/30		sdc	Vf	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	9600	100	96	A++
V ₀ 010-40	les16 	Ta25 °C		vita media · average life	50000 h		L80	B10	

accessori. accessories. 240V / 24Vdc  CE 

a9.532.95 rosone incasso ottone naturale 120W 2,8
con alimentatore dimmer dali/pulsante/1-10V
natural brass ceiling rose recessed
with dimmer dali power supply/button/1-10V

a9.532.96 rosone soffitto ottone naturale 120W 5,5
con alimentatore dimmer dali/pulsante/1-10V
natural brass ceiling rose
with dimmer dali power supply/button/1-10V



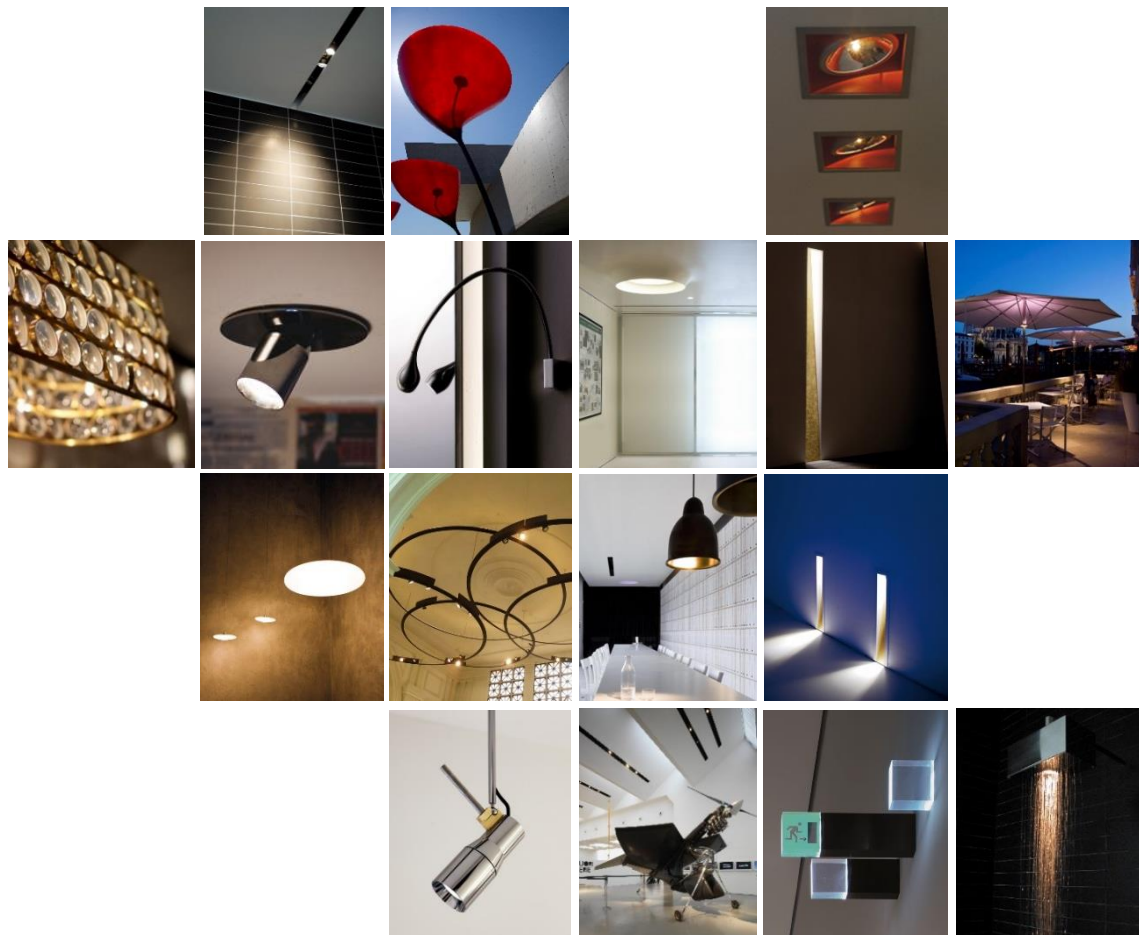

**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

