



**apparecchio di illuminazione a parete per interni IP20.
realizzato in alluminio verniciato o in ottone ossidato.
costituito da un corpo cilindrico strombato e da un vetro cilindrico trasparente in pirex la cui chiusura è realizzata mediante l'utilizzo di un cono in ottone riflettente, con piastra di fissaggio a parete diametro Ø65mm.**

modelli:

royal parete 60 diametro Ø60mm h.235mm,

royal parete 80 diametro Ø80mm h.305mm.

cablato con sorgente elettronica 3000K Ra98 fino a 14W 1580lm.

alimentatore in corrente costante escluso, da installare remoto.

accessori: sistema di fissaggio a cartongesso.

finiture: my bianco, nero55 e copper bronze.

IP20 rated wall light fitting for indoor use.

made of painted aluminium or oxidised brass.

consisting of a splayed cylindrical body and a transparent pyrex cylindrical glass which is closed by means of a reflecting brass cone, with wall fixing plate diameter Ø65mm.

versions:

royal parete 60 diameter Ø60mm h.235mm,

royal parete 80 diameter Ø80mm h.305mm.


wired with 3000K Ra98 led source up to 14W 1580lm.

constant current power supply not included, to be installed remotely.

accessories: plasterboard installation kit.

finishes: my bianco, nero55 and copper bronze.



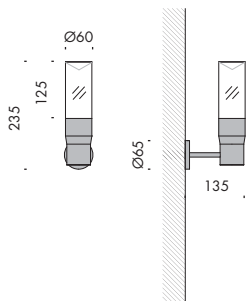

royal parete 60




IP20



| | | | | | |
|-------------------|---------------|--------------------------|--|-------|-----|
| Vb6.573.26 | my bianco | trasparente · trasparent | | 3000K | 1,1 |
| Vb6.573.27 | nero55 | trasparente · trasparent | | 3000K | 1,1 |
| Vb6.573.28 | copper bronze | trasparente · trasparent | | 3000K | 1,1 |

| Ra | R9 | ies tm-30 | | sdcn | mA | V _f (min) | lm | W | lm/W | |
|-------|-------|-----------|---------|---------------------------|-----|----------------------|------|-----|------|------------|
| 98 | 98 | Rf 96 | Rg 103 | step 1 | 350 | 27,6 | 1240 | 9,7 | 128 | A++ |
| xm001 | les19 | ☉ | Ta25 °C | vita media · average life | | 70000 h | L80 | B10 | | |

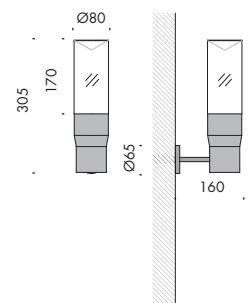

royal parete 80



IP20



| | | | | | |
|-------------------|---------------|--------------------------|--|-------|-----|
| Vb6.573.36 | my bianco | trasparente · trasparent | | 3000K | 2,5 |
| Vb6.573.37 | nero55 | trasparente · trasparent | | 3000K | 2,5 |
| Vb6.573.38 | copper bronze | trasparente · trasparent | | 3000K | 2,5 |


| Ra | R9 | ies tm-30 | | sdcn | mA | V _f (min) | lm | W | lm/W | |
|-------|-------|-----------|---------|---------------------------|-----|----------------------|------|------|------|------------|
| 98 | 98 | Rf 96 | Rg 103 | step 1 | 350 | 27,6 | 1240 | 9,7 | 128 | A++ |
| | | | | | 500 | 27,9 | 1580 | 14,0 | 113 | A+ |
| xm001 | les19 | ☉ | Ta25 °C | vita media · average life | | 70000 h | L80 | B10 | | |

accessori. accessories.



| | | |
|------------------|--|-----|
| a9.573.89 | kit fissaggio cartongesso plasterboard fixing kit | 0,2 |
|------------------|--|-----|



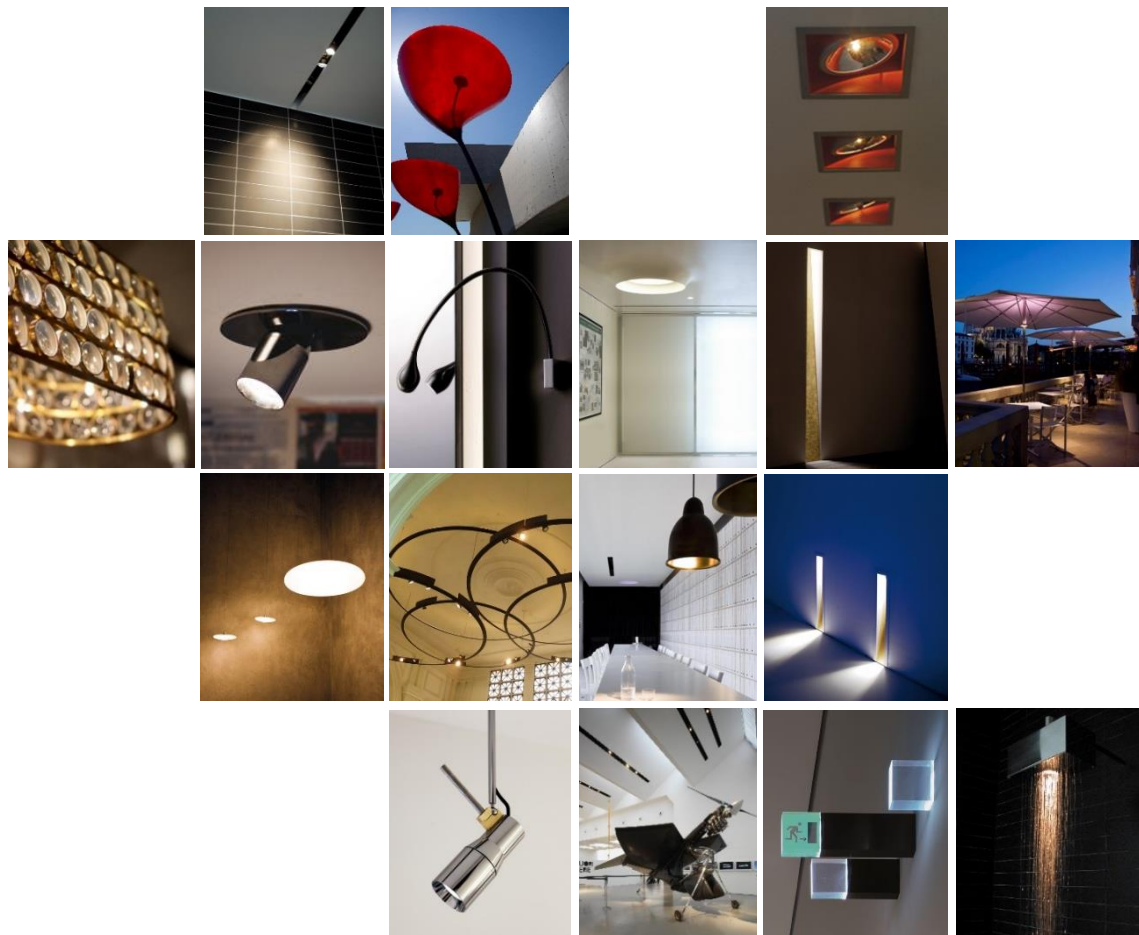

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

