



**apparecchio di illuminazione da parete, soffitto o libreria per interni IP20.
realizzato in alluminio estruso e ossidato di sezione 32x30mm, dimensioni massime 430x310mm.**

modelli:

punto elle parete soffitto.

punto elle libreria.

**cablato con sorgente elettronica 3000K Ra95 26W/m per luce diffusa,
3000K Ra95 2,2W 130lm per luce spot, orientabile di 35° sull'asse orizzontale e 24° su quello
verticale.**

ottiche: 25°.

alimentatore 240V 50-60Hz incluso.

finiture: argento opaco, my bianco.

**IP20 rated wall, ceiling or bookcase light fitting for indoor use.
made of oxidised extruded aluminium having a 32x30 mm section, maximum size
430x310mm.**

versions:

punto elle parete soffitto.

punto elle libreria.

wired with 3000K Ra95 26W/m led source for diffused light,

3000K Ra95 2.2W 130lm for spot light.


the spot can be adjusted by 35° on the horizontal and 24°vertical axis.

optics: 25°.

240V 50-60Hz power supply included.

finishes: matt silver, my bianco.



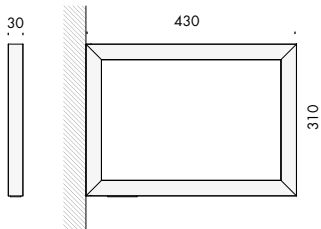

punto alle parete soffitto 240V 50-60Hz

Vb6.564.01.1 argento opaco 3000K l.d. 2,2W 25° 1,6
matt silver l.i. 5,2W diffusa · diffused

Vb6.564.03.1 my bianco 3000K l.d. 2,2W 25° 1,6
l.i. 5,2W diffusa · diffused

I.d. (luce diretta · direct light)

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	3,0	130	2,2	59	A+
ca041	les2 ◦ Ta25 °C		vita media · average life		50000 h	L80 B10			

I.i. (luce indiretta · indirect light)

Ra	R9	ies tm-30		sdc	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	A+
V3001	11		Ta25 °C		vita media · average life		50000 h	L80 B10	

punto alle libreria 240V 50-60Hz

Vb6.564.11.1 argento opaco 3000K l.d. 2,2W 25° 1,6
matt silver l.i. 5,2W diffusa · diffused




Vb6.564.13.1 my bianco 3000K l.d. 2,2W 25° 1,6
l.i. 5,2W diffusa · diffused


I.d. (luce diretta · direct light)

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	3,0	130	2,2	59	A+
ca041	les2 ◦ Ta25 °C		vita media · average life		50000 h	L80 B10			

I.i. (luce indiretta · indirect light)

Ra	R9	ies tm-30		sdc	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	A+
V3001	11		Ta25 °C		vita media · average life		50000 h	L80 B10	

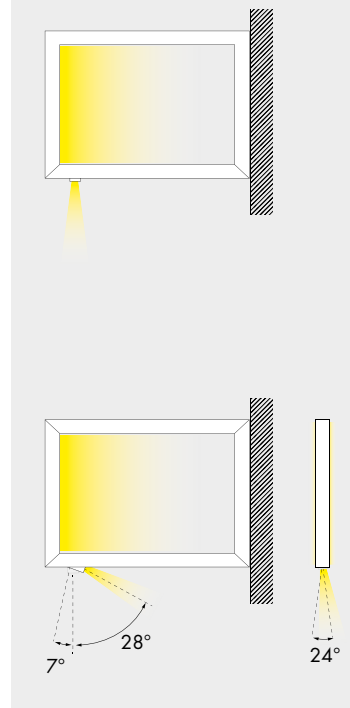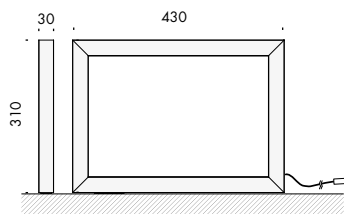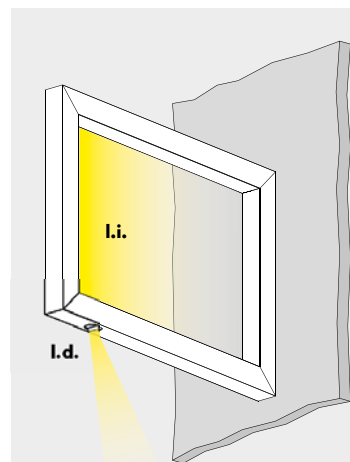

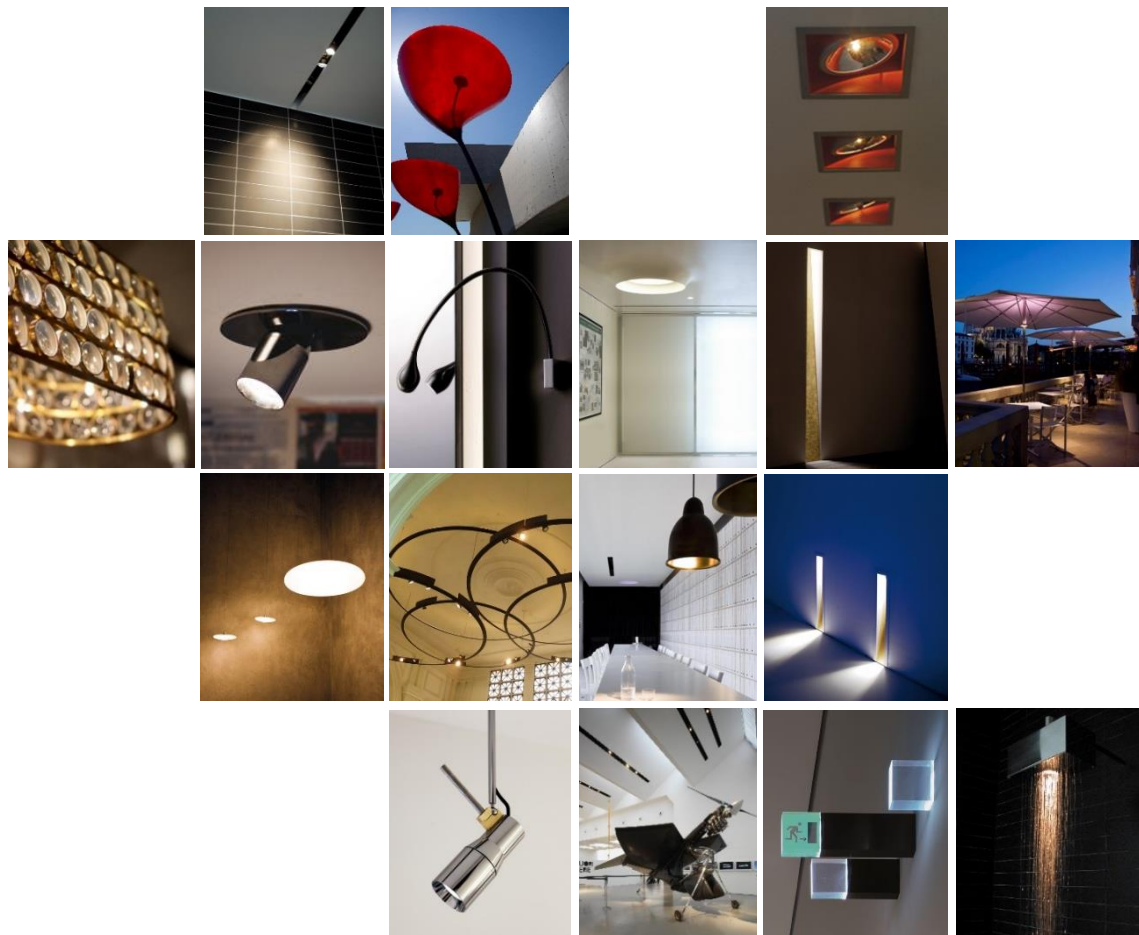

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

