

bacchetta magica led mario nanni 2009



apparecchio di illuminazione per interni ed esterni IP65. realizzato in policarbonato trasparente con trattamento per raggi ultravioletti, può essere installato a parete o a soffitto con gli appositi sistemi di fissaggio in dotazione o a sospensione tramite apposito kit non incluso.

modelli:

bacchetta magica led diametro Ø22mm disponibile in 635,935,1235 e 1535mm cablato con sorgente elettronica lineare 3000K Ra95 13W/m con connettore m8 IP67 incluso, alimentatore a tensione costante 24Vdc escluso, da installare remoto.

bacchetta magica led diametro Ø40mm disponibile in 935,1545 e 1845mm sia nella versione monoemissione cablata con sorgente elettronica lineare 3000K Ra95 26W/m sia biemissione cablata con doppia sorgente elettronica lineare 3000K Ra95 13W/m, alimentatore 240V 50-60Hz incorporato.

accessori: cavo di diverse lunghezze con connettore m8 IP67 per versione diametro Ø22mm, sistema di derivazione tensione continua, rosoni di alimentazione, kit di sospensione. finiture: policarbonato trasparente.

IP65 rated light fitting for indoor and outdoor use.

made of transparent ultraviolet resistant polycarbonate, which can be wall or ceiling installed using the specific installation systems provided, or suspended using the kit to be ordered separately.


versions:



bacchetta magica led diameter Ø22mm available in 635,935,1235 and 1535mm wired with 3000K 13W/m linear led source with m8 IP67 connector included, constant voltage 24Vdc power supply not included, to be installed remotely.

bacchetta magica led diameter Ø40mm available in 935,1545 and 1845mm available either in the unidirectional version wired with 3000K Ra95 26W/m linear led source and the bi-directional version wired with 3000K Ra95 13W/m double linear led source, 240V 50-60Hz built-in power supply.

accessories: cable with m8 IP67 connector available in different lengths for diameter Ø22mm version, constant power derivation system, power supply roses, suspension kit. finishes: transparent polycarbonate.



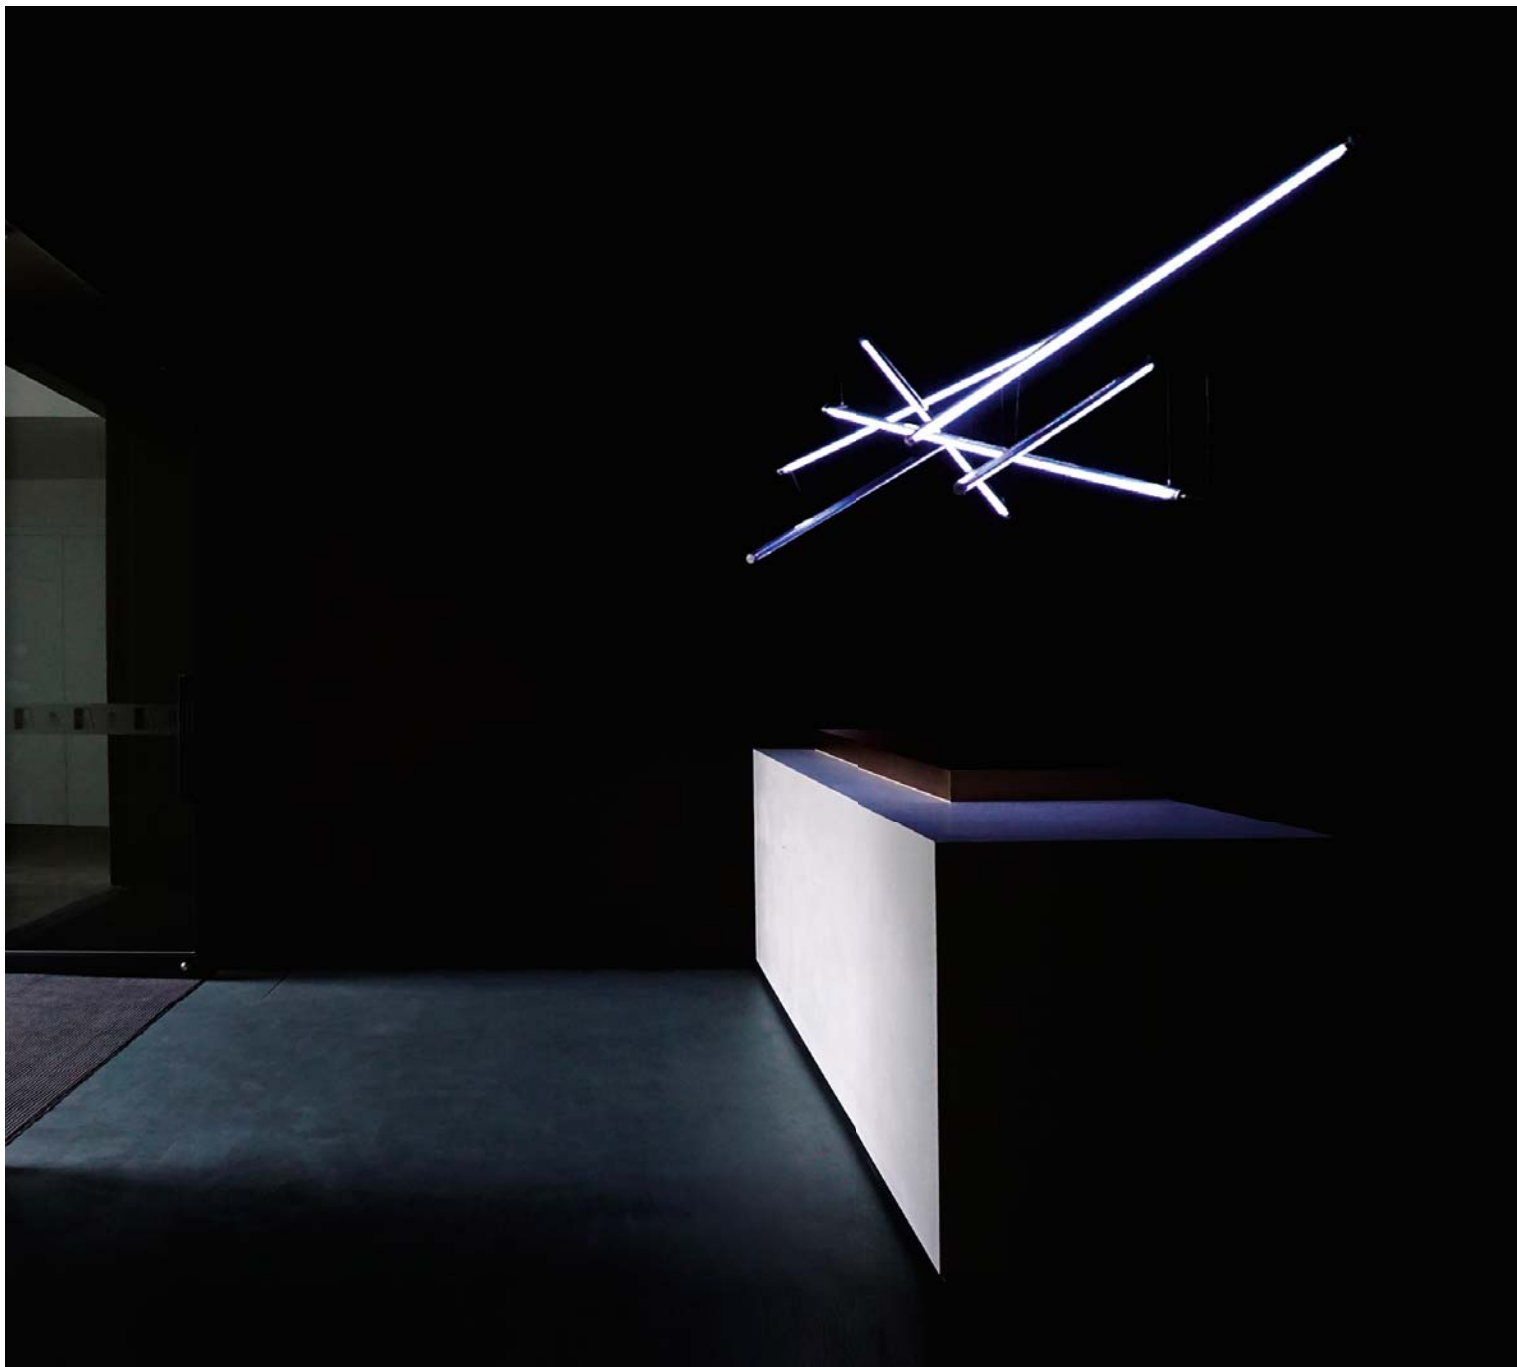

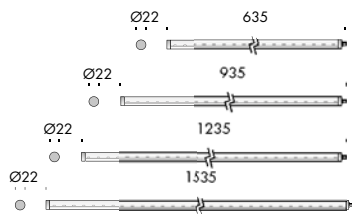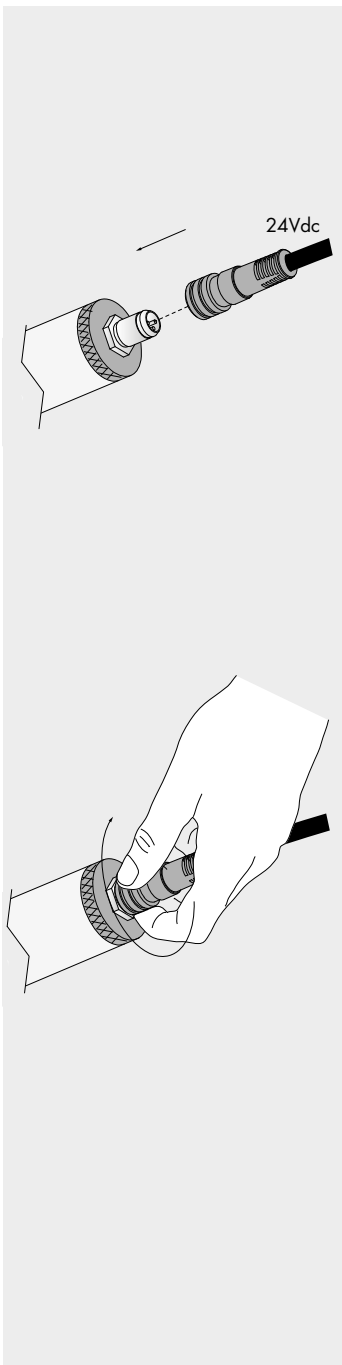

bacchetta magica led 22		24Vdc	IP65	IK09	☆	CE	i
f6.195.06	3000K	7,8W	635mm	0,3			
f6.195.09	3000K	11,7W	935mm	0,4			
f6.195.12	3000K	15,6W	1235mm	0,5			
f6.195.15	3000K	19,5W	1535mm	0,7			

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	IP
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9	Ta25 °C		vita media · average life	50000 h	L80	B10		


cavi con connettore femmina m8. cables with m8 female connector. IP67 ☆ CE i		
f9.250.71	150mm	0,01
f9.164.86	2000mm	0,1
f9.164.87	5000mm	0,2
f9.164.88	10000mm	0,3




cavi con connettori m/f m8. cables with m8 m/f connectors. IP67 ☆ CE i		
f9.250.72	2000mm	0,1
f9.250.73	5000mm	0,3
f9.250.74	10000mm	0,6



sistema di derivazione tensione continua. dc derivation hub. CE i		
f9.250.79	con 6 connettori femmina +1 connettore maschio m8 with 6 female connectors +1 male connector m8	0,1



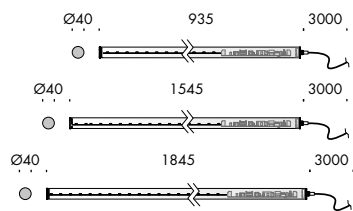


bacchetta magica led 40 240V 50-60Hz **A** **IP65 IK09** **CE** **i**

Vb6.195.21 3000K 18W 935mm 0,8

Vb6.195.23 3000K 32W 1545mm 1,3

Vb6.195.25 3000K 40W 1845mm 1,6

Ra	R9	ies tm-30		sdcn	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	2500	26	96	A+
V3001	11	Ta25 °C		vita media · average life	50000 h	L80	B10		

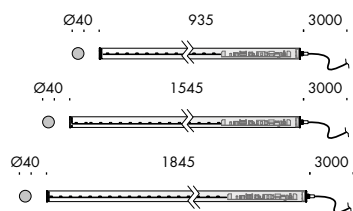

bacchetta magica led 40 240V 50-60Hz **A** **IP65 IK09** **CE** **i**

Vb6.195.31 3000K 2x9W 935mm 0,8

Vb6.195.33 3000K 2x16W 1545mm 1,3


Vb6.195.35 3000K 2x20W 1845mm 1,6

I.d. (luce diretta · direct light)

Ra	R9	ies tm/30		sdcn	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9	Ta25 °C		vita media · average life	50000 h	L80	B10		

I.i. (luce indiretta · indirect light)

Ra	R9	ies tm/30		sdcn	V _f	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	A+
V0001	5,9	Ta25 °C		vita media · average life	50000 h	L80	B10		




accessori. accessories. **★ CE i**

f9.116.05 rosone di alimentazione
ceiling rose power supply 0,4

f9.116.06 kit per sospensione · suspension kit 3000mm 0,1

bacchetta magica led 40
monoemissione · unidirectional



bacchetta magica led 40
biemissione · bidirectional

I.i.



I.d.



Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

