



**apparecchio di illuminazione a incasso da tavolo e parete per interni IP20.**

**costituito da una piastra in alluminio ossidato e cromato 850x70mm e da un corpo incassato 850x51x145mm; la lampada funziona a pressione: spingendo la piastra che si trova a filo con la superficie di appoggio, il corpo si alza di 75mm e la luce si accende.**

**quando la lampada emerge una piastra rivestita in pelle nera per la versione tavolo, in acciaio verniciato bianco V per la versione parete, arriva a filo con il piano del tavolo.**

**cablato con sorgente elettronica lineare con limitatore di corrente integrato Ra95 3000K 21W 2016lm.**

**alimentatore 240V 50-60Hz incluso.**

**finiture: cromo lucido, bianco V.**

**IP20 rated table and wall recessed light fitting for indoor use. made of an 850x70mm oxidised and chrome aluminium plate and an 850x51x145mm recessed body;**


**the lamp is operated by touch: by pressing the plate flush with the supporting surface, the body rises by 75mm and the light switches on.**

**when the lamp rises, a plate covered with black leather for the table version and bianco V painted steel for the wall version becomes flush with the table surface.**

**wired with Ra95 3000K 21W 2016lm linear led source with integrated current limiter. 240V 50-60Hz power supply included.**

**finishes: polished chrome, bianco V.**







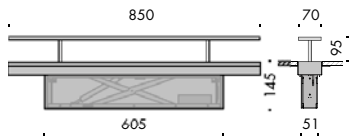


**spingi tavolo** 240V 50-60Hz **A** **IP20** **CE**

- Vb2.217.01** cromo lucido · polished chrome  
pelle nera · black leather 3000K 21W 7,5
- Vb2.217.03** bianco V  
pelle nera · black leather 3000K 21W 7,5


Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	<b>A+</b>
V0001	5,9	Ta25 °C		vita media · average life	50000 h	L80	B10		

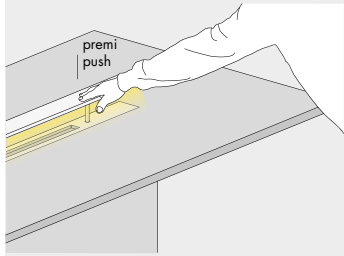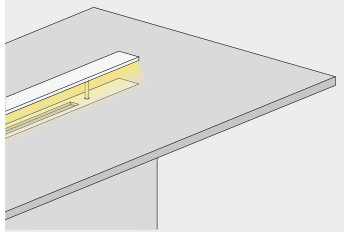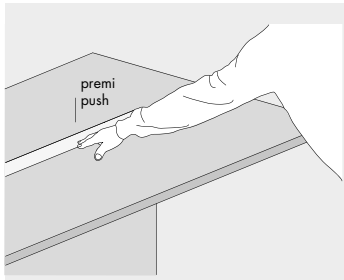

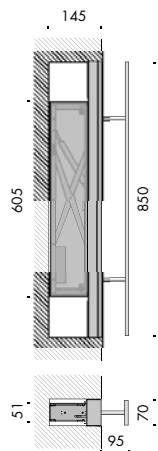

spingi parete		240V 50-60Hz	A	IP20	CE	i
<b>Vb6.217.11</b>	cromo lucido · polished chrome bianco V	3000K	21W	7,5		
<b>Vb6.217.13</b>	bianco V bianco V	3000K	21W	7,5		

Ra	R9	ies tm/30		sdc	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	<b>A+</b>
V0001	5,9	Ta25 °C		vita media · average life	50000 h	L80	B10		

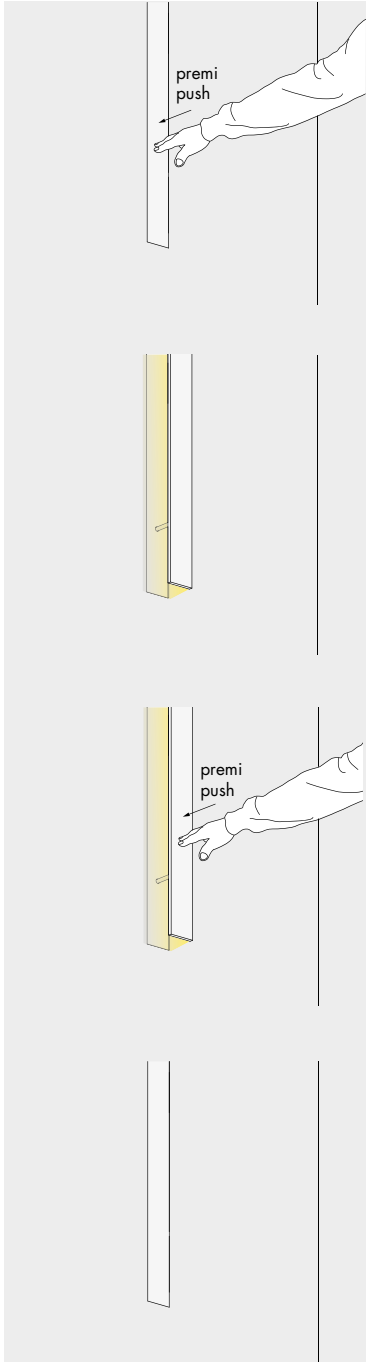



Subscribe To Our Newsletter



**Distributor for Viabizzuno  
Architectural Lighting Solutions**

Web: [www.cirruslighting.co.uk](http://www.cirruslighting.co.uk)

Email: [sales@cirruslighting.co.uk](mailto:sales@cirruslighting.co.uk)

Tel: 0207 193 2175

Fax: 0207 193 3175

