





apparecchio di illuminazione a binario per interni IP20.
realizzato in alluminio ossidato e verniciato a polvere, composto da un faretto diametro Ø55mm h.69mm fissato ad un adattatore tramite un giunto di rotazione, orientabile di 360° sull'asse verticale e di 90° su quello orizzontale.
cablato con sorgente elettronica les6 12,4W o les14 17,4W con 2700K fino a 1680lm o 3000k fino a 1796lm.
ottiche: 13° 19° 36°
alimentatore 220-240V 50-60Hz incluso.
finiture: my bianco, nero55.

IP20 rated track-mounted light fitting for indoor use.
made of powder coated oxidized aluminium, consisting of diameter Ø55mm h.69mm spotlight fixed to an adapter through a turning joint, adjustable by 360° on the vertical axis and by 90° on the horizontal axis.
wired with les6 12,4W or les14 17,4W 2700K up to 1680lm or 3000K up to 1796lm led source.
optics: 13° 19° 36°
spotlight 220-240V 50-60Hz included.
finishes: my bianco, nero55.

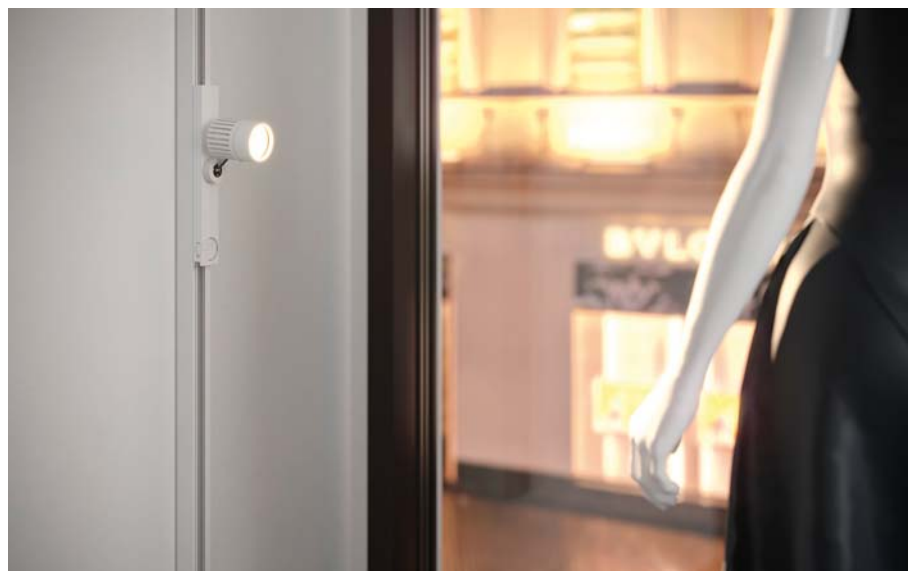



eco mini track 220-240V 50-60Hz **A** **IP20** **CE** **i**

Vb7.579.11.27 my bianco 2700K 13° 0,7

Vb7.579.12.27 nero55 2700K 13° 0,7



Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	700	17,8	767	12,4	62	A
cd010	lesó	● Ta25 °C	vita media · average life		50000 h	L70	B10		

Vb7.579.11.30 my bianco 3000K 13° 0,7




Vb7.579.12.30 nero55 3000K 13° 0,7

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	700	17,8	826	12,4	66	A
cd011	lesó	● Ta25 °C	vita media · average life		50000 h	L70	B10		

gradi di apertura fascio luminoso 13°
beam's angle degrees

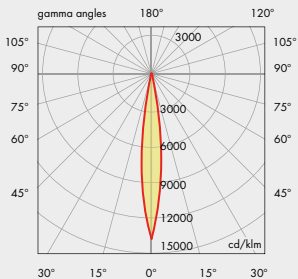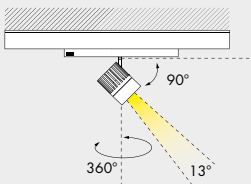

gradi di apertura fascio luminoso 19°
beam's angle degrees

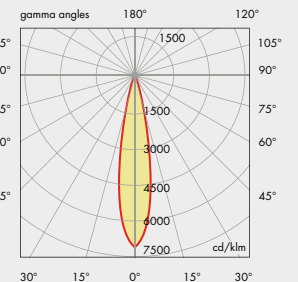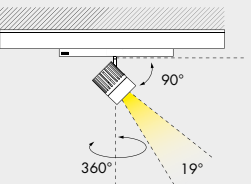

eco mini track 220-240V 50-60Hz **A** **IP20** **CE** **i**

Vb7.579.13.27 my bianco 2700K 19° 0,7

Vb7.579.14.27 nero55 2700K 19° 0,7




Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	500	34,8	1680	17,4	97	A+
ci000	les14	● Ta25 °C	vita media · average life		50000 h	L70	B10		

Vb7.579.13.30 my bianco 3000K 19° 0,7

Vb7.579.14.30 nero55 3000K 19° 0,7

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	500	34,8	1796	17,4	103	A+
ci001	les14	● Ta25 °C	vita media · average life		50000 h	L70	B10		

gradi di apertura fascio luminoso 36°
beam's angle degrees

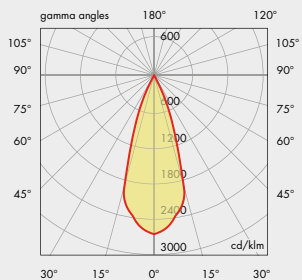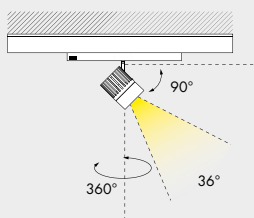

eco mini track 220-240V 50-60Hz

Vb7.579.15.27 my bianco 2700K 36° 0,7

Vb7.579.16.27 nero55 2700K 36° 0,7

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	500	34,8	1680	17,4	97	A+
ci000	les14 ● Ta25 °C		vita media · average life		50000 h	L70 B10			

Vb7.579.15.30 my bianco 3000K 36° 0,7

Vb7.579.16.30 nero55 3000K 36° 0,7

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	500	34,8	1796	17,4	103	A+
ci001	les14 ● Ta25 °C		vita media · average life		50000 h	L70 B10			

accessori. accessories.




Vb9.580.91 frangiluce nido d'ape · louvre honeycomb 0,01



Vb9.580.92 lente ellittica · elliptical lens 0,04



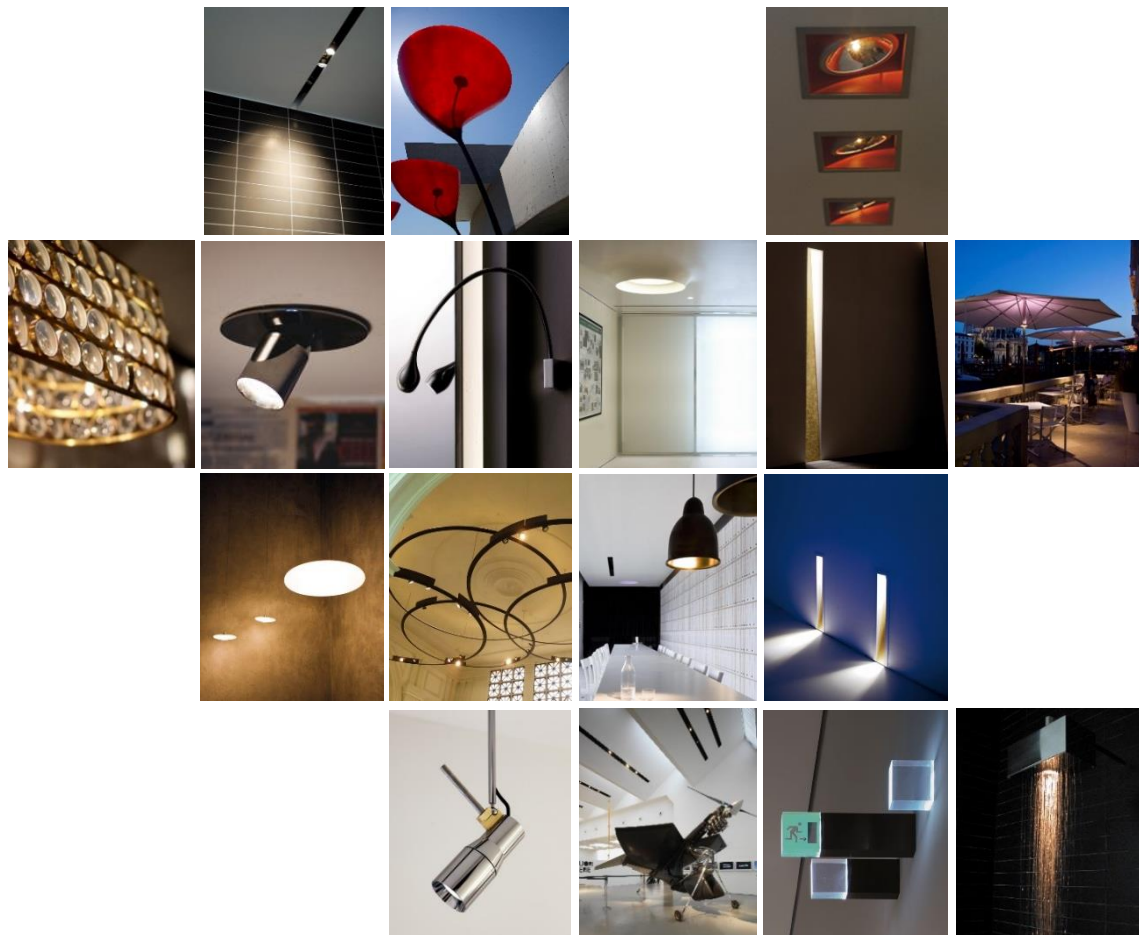

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

