


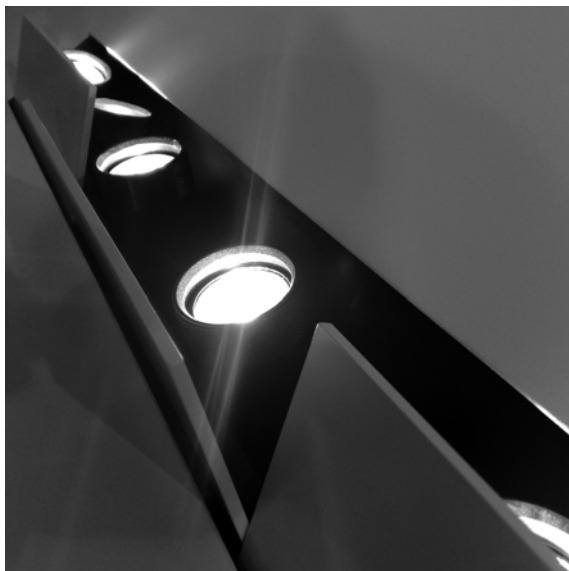

sistema ad incasso per interni IP20. composto da un profilo estruso in alluminio sezione 94x28,5mm che crea una cornice di forma rettangolare fino a 1298mm o lineare fino a 3000mm, su cui vengono fissati i kit di cablaggio realizzati in alluminio ossidato di dimensioni 322x84x174mm. i faretti sono orientabili di 45° sull'asse orizzontale e di 75° sull'asse verticale, lo sportello può ruotare fino a 105°.

kit eco mini è cablato con sorgente elettronica Ra95 3000K 2x12,4W 2x826lm 12° e 2x12,7W 2x1075lm 18° e 36°.

alimentatore 240V 50-60Hz incluso accessori: carter fino a 4 moduli, kit sportello cieco.

finiture: profilo e cornice nero; kit eco mini e kit sportello cieco bianco V, alluminio lucido e nero55.

IP20 rated recessed system for indoor use.

it consists of an extruded aluminium profile having a section of 94x28.5mm creating a rectangular frame up to 1298mm or a linear frame up to 3000mm, holding the oxidised aluminium wiring kits measuring 322x84x174mm.

the spotlights can be adjusted by 45° on the horizontal axis and by 75° on the vertical axis, while the lid can rotate up to 105°.




kit eco mini is wired with Ra95 3000K 2x12.4W 2x826lm 12° led source and 2x12.7W 2x1075lm 18° and 36° led source.

240V 50-60Hz power supply included

accessories: casing up to 4 modules, blind lid kit.

finishes: black profile and frame; bianco V, polished aluminium and nero55 kit eco mini and kit sportello cieco.






componenti. components.		☒	€	i
f6.094.02.n nero · black	2 pz · pcs		500mm	1,3
f6.094.04.n nero · black	2 pz · pcs		1000mm	2,5
f6.094.06.n nero · black	2 pz · pcs		2000mm	5
f6.094.08.n nero · black	2 pz · pcs		3000mm	7,6

f6.186.02 nero · black	1 modulo · module		326x130mm	1,9
f6.186.03 nero · black	2 moduli · modules		650x130mm	2,6
f6.186.04 nero · black	3 moduli · modules		974x130mm	3,3
f6.186.05 nero · black	4 moduli · modules		1298x130mm	4,4

carter.			€	i
f6.186.06 nero55	1 modulo · module		504mm	2,4
f6.186.07 nero55	2 moduli · modules		837mm	3,6
f6.186.08 nero55	3 moduli · modules		1170mm	5,2
f6.186.09 nero55	4 moduli · modules		1503mm	6,2





kit eco mini			240V 50-60Hz		A	K	⊕	IP20	⚡	CE	i
Vb6.186.51		sportello · flap		bianco V	3000K	12°	2x12,4W		2,2		
Vb6.186.52		sportello · flap		alluminio lucido polished aluminium	3000K	12°	2x12,4W		2,2		
Vb6.186.53		sportello · flap		nero55	3000K	12°	2x12,4W		2,2		
Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W		
95		Rf 92	Rg 100	step 2	700	17,8	826	12,4	66	A	
cd011	les6	Ta25 °C		vita media · average life		50000 h		L70		B10	

Vb6.186.54 sportello · flap bianco V 3000K 18° 2x12,7W 2,2

Vb6.186.55 sportello · flap alluminio lucido
polished aluminium 3000K 18° 2x12,7W 2,2

Vb6.186.56 sportello · flap nero55 3000K 18° 2x12,7W 2,2


Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W		
95		Rf 92	Rg 100	step 2	700	18,2	1075	12,7	85	A+	
ce001	les9 	Ta25 °C		vita media · average life			50000 h	L70	B10		

Vb6.186.57 sportello · flap bianco V 3000K 36° 2x12,7W 2,2


Vb6.186.58 sportello · flap alluminio lucido
polished aluminium 3000K 36° 2x12,7W 2,2

Vb6.186.59 sportello · flap nero55 3000K 36° 2x12,7W 2,2



Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95		Rf 92	Rg 100	step 2	700	18,2	1075	12,7	85	A+
ce001	les9 	Ta25 °C		vita media · average life			50000 h	L70	B10	





kit sportello cieco			CE	
f9.186.41	sportello · flap	bianco V		0,9
f9.186.42	sportello · flap	alluminio lucido · polished aluminium		0,9
f9.186.43	sportello · flap	nero55		0,9

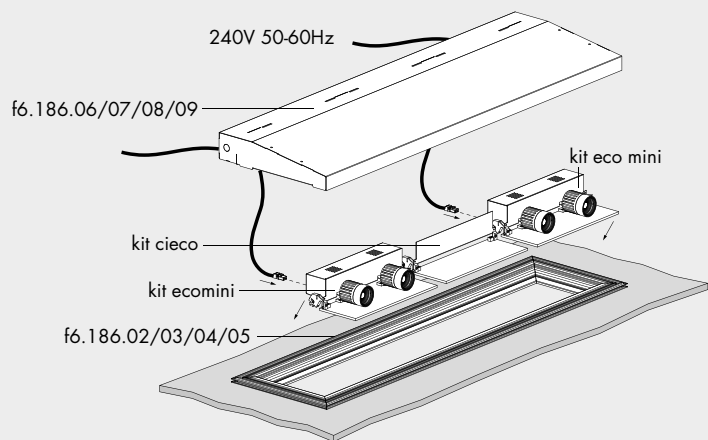


gradi di rotazione
rotation degrees

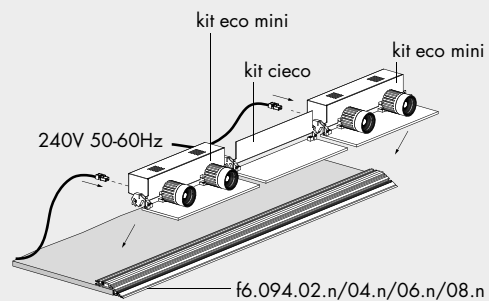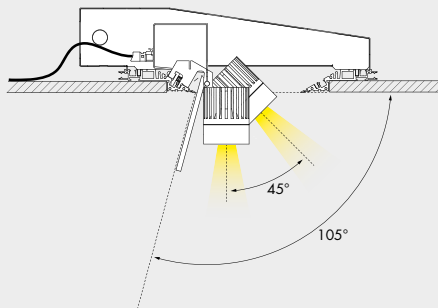

gradi di rotazione
rotation degrees

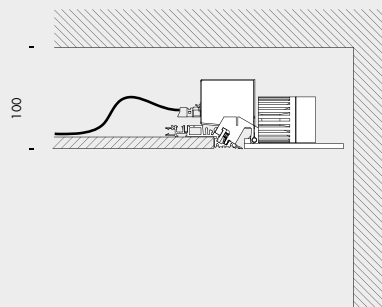

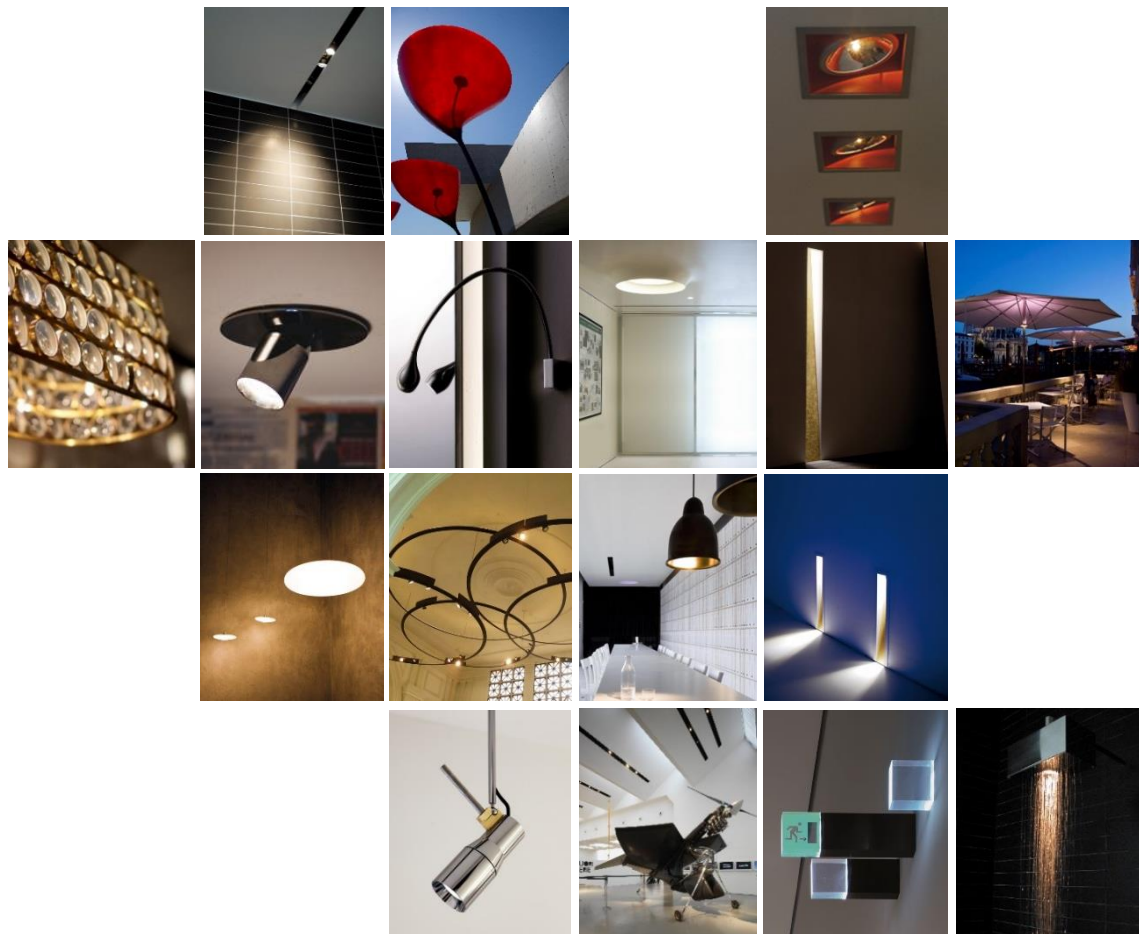

Contact Us

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

