luna peter zumthor 2003

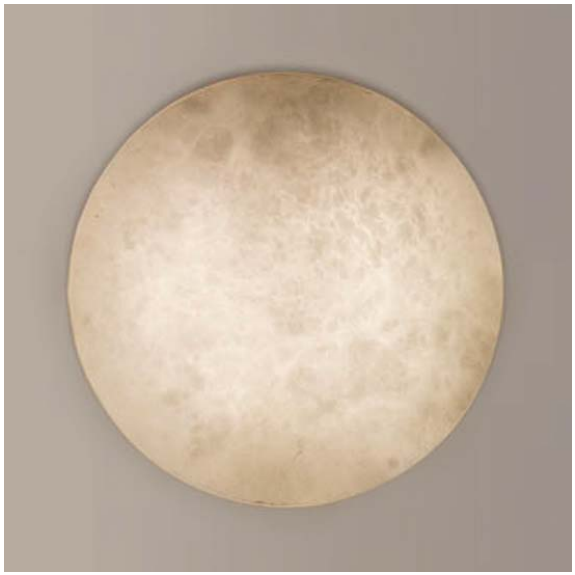

apparecchio di illuminazione da incasso per interni IP20.
realizzato in acciaio e verniciato a polvere, diffusore in alabastro naturale.
modelli:
luna 80 diametro Ø230x75mm con diffusore diametro Ø82mm,
luna 130 diametro Ø230x96mm con diffusore diametro Ø132mm,
luna 330 diametro Ø476x77mm con diffusore diametro Ø332mm.
cablato con sorgente elettronica 3000K Ra90 16W 1550lm, 21W 2040lm e 37W 3600lm.
alimentatore 240V 50-60Hz incluso. alimentatore dimmerabile dali incluso solo per luna 330.
accessori: olio di vaselina.
finiture: corpo bianco V, diffusore alabastro naturale.

IP20 rated recessed light fitting for indoor use.
powder coated steel with natural alabaster made diffuser.
versions:
luna 80 diameter Ø230x75mm with diameter Ø82mm diffuser,
luna 130 diameter Ø230x96mm with diameter Ø132mm diffuser,
luna 330 diameter Ø476x77mm with diameter Ø332mm diffuser.
wired with 3000K Ra90 16W 1550lm, 21W 2040lm and 37W 3600lm led source.
240V 50-60Hz power supply included. dali dimmable power supply included only for luna 330 version.
accessories: paraffin oil.
finishes: bianco V fitting, natural alabaster diffuser.



luna 80

240V 50-60Hz A · IP20 · CE

Vb6.170.02 corpo bianco V - diffusore alabastro naturale
bianco V fitting - natural alabaster diffuser — 3000K — 2,9

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 3	700	22,1	1550	16	97	**A+**
ty011	les80	Ta25 °C	vita media · average life			50000 h		L70 B10	





luna 130

240V 50-60Hz A · IP20 · CE

Vb6.170.12 corpo bianco V - diffusore alabastro naturale
bianco V fitting - natural alabaster diffuser — 3000K — 3,2

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 3	600	34,5	2040	21	97	**A+**
ty021	Ta25 °C	vita media · average life				50000 h		L70 B10	





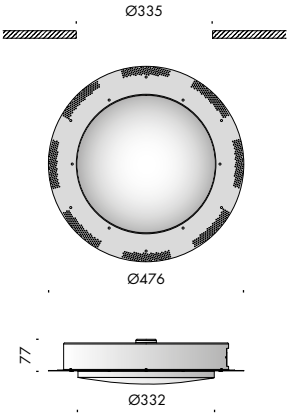

luna 330

240V 50-60Hz A · IP20 · CE

Vb6.170.22 corpo bianco V - diffusore alabastro naturale
bianco V fitting - natural alabaster diffuser — 3000K — 9

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 3	1050	34,7	3600	37	97	**A+**
ty031	Ta25 °C	vita media · average life				50000 h		L70 B10	





accessori. accessories.	CE	i

f9.170.90	olio di vaselina · vaseline oil	0,1



il diffusore in alabastro va protetto almeno una volta all'anno con una applicazione di olio di vaselina, dopo averlo spolverato con un panno morbido appena inumidito e dopo averlo ben asciugato.
the alabaster-made diffuser must be protected at least once in a year with an application of vaseline oil. dust must be removed with a soft barely dampen fabric before the application after the glass dry off.





Subscribe To Our Newsletter

Cirrus Lighting

Distributor for Viabizzuno
Architectural Lighting Solutions
Web: www.cirruslighting.co.uk
Email: sales@cirruslighting.co.uk
Tel: 0207 193 2175
Fax: 0207 193 3175