

net parete soffitto

marco costanzi mario nanni 2015



apparecchio di illuminazione da parete e soffitto per interni IP20. composto da corpo rettangolare 240x70x95mm e 480x73x95mm, realizzato in acciaio verniciato a polvere.

modelli:

net 24 parete soffitto spot 20° per luce d'accento 20,4W fino a 1479lm,

net 24 parete soffitto con vetro sabbato di protezione per luce diffusa fino a 16,9W 1380lm,

net 48 parete soffitto con vetro sabbato di protezione per luce diffusa fino a 33,8W 2760lm,

net 48x4 parete soffitto spot 20° per luce d'accento 27,2W 1972lm,

net 48x6 parete soffitto spot 20° per luce d'accento 40,8W fino a 2958lm.

i modelli spot 20° sono dotati di corpo orientabile fino a 355° sull'asse verticale e di 20° sull'asse orizzontale e di anello antiabbagliamento per garantire comfort visivo.

cablato con sorgente elettronica 2700K o 3000K.

alimentatore 240V incluso solo per modello net 48x4 parete soffitto spot.

finiture: bianco V, argento hacca e marrone mn.

IP20 rated wall and ceiling light fitting for indoor use.

made of a powder coated steel rectangular body measuring 240x70x95mm and 480x73x95mm.

versions:

net 24 parete soffitto spot 20° with spot light 20.4W up to 1479lm,

net 24 parete soffitto with sanded glass for diffuse light up to 16.9W 1380lm,

net 48 parete soffitto with protective sanded glass for diffuse light up to 33.8W 2760lm,

net 48x4 parete soffitto spot 20° with spot light 27.2W 1972lm,


net 48x6 parete soffitto spot 20° with spot light 40.8W up to 2958lm.


20° spotlight versions have a body adjustable by 355° on the vertical axis and by 20° on the horizontal axis and an anti-glare ring ensuring high visual comfort.

wired with 2700K or 3000K led sources.

240V power supply included only for spotlight model net 48x4 parete soffitto.

finishes: bianco V, argento hacca and marrone mn.

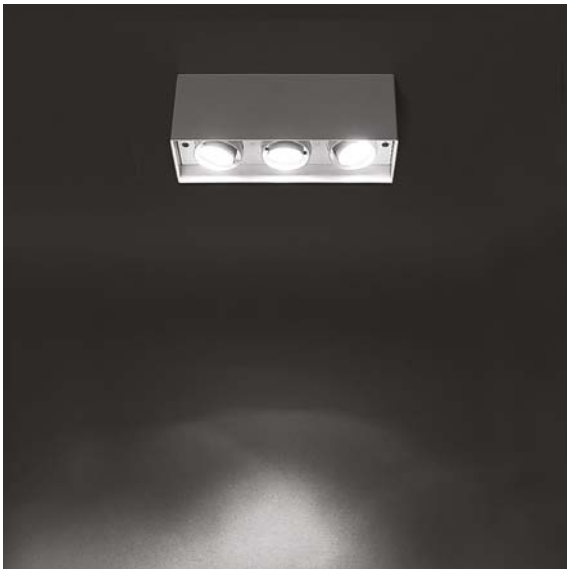


net 24 parete soffitto spot

IP20



CE



Vb6.592.41.27	bianco V	2700K	3x6,8W	20°	1,7
Vb6.592.42.27	argento hacca	2700K	3x6,8W	20°	1,7
Vb6.592.44.27	marrone mn	2700K	3x6,8W	20°	1,7

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	700	29,1	1299	20,4	64	A
cd020-3	lesó	Ta25 °C	vita media · average life		50000 h	180	B10		

Vb6.592.41.30	bianco V	3000K	3x6,8W	20°	1,7
Vb6.592.42.30	argento hacca	3000K	3x6,8W	20°	1,7
Vb6.592.44.30	marrone mn	3000K	3x6,8W	20°	1,7

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	700	29,1	1479	20,4	73	A+
cd021-3	lesó	Ta25 °C	vita media · average life		50000 h	180	B10		

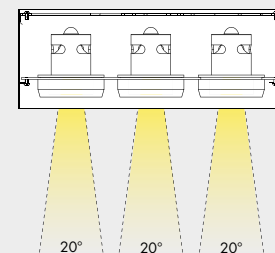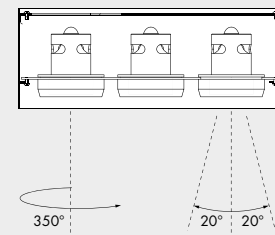




net 24 parete soffitto diffusa

- Vb6.592.45.27** bianco V 2700K luce diffusa · diffused light 1,7
- Vb6.592.46.27** argento hacca 2700K luce diffusa · diffused light 1,7
- Vb6.592.47.27** marrone mn 2700K luce diffusa · diffused light 1,7

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
97	90	Rf 96	Rg 100	step 2	500	23,7	877	11,9	74	A
					700	24,2	1208	16,9	71	A
dz010		10		Ta25 °C		vita media · average life		50000 h	L80	B10

- Vb6.592.45.30** bianco V 3000K luce diffusa · diffused light 1,7
- Vb6.592.46.30** argento hacca 3000K luce diffusa · diffused light 1,7
- Vb6.592.47.30** marrone mn 3000K luce diffusa · diffused light 1,7

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
97	90	Rf 96	Rg 100	step 2	500	23,7	1002	11,9	84	A+
					700	24,2	1380	16,9	82	A
dz011		10		Ta25 °C		vita media · average life		50000 h	L80	B10

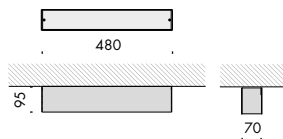


net 48 parete soffitto diffusa

- Vb6.592.60.27** bianco V 2700K luce diffusa · diffused light 3
- Vb6.592.61.27** argento hacca 2700K luce diffusa · diffused light 3
- Vb6.592.62.27** marrone mn 2700K luce diffusa · diffused light 3

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
97	90	Rf 96	Rg 100	step 2	500	47,4	1754	23,8	74	A
					700	48,4	2416	33,8	71	A
dz010-2		10		Ta25 °C		vita media · average life		50000 h	L80	B10

- Vb6.592.60.30** bianco V 3000K luce diffusa · diffused light 3
- Vb6.592.61.30** argento hacca 3000K luce diffusa · diffused light 3
- Vb6.592.62.30** marrone mn 3000K luce diffusa · diffused light 3

Ra	R9	ies tm-30		sdc	mA	V _{f(min)}	lm	W	lm/W	
97	90	Rf 96	Rg 100	step 2	500	47,4	2004	23,8	84	A+
					700	48,4	2760	33,8	82	A
dz011-2		10		Ta25 °C		vita media · average life		50000 h	L80	B10

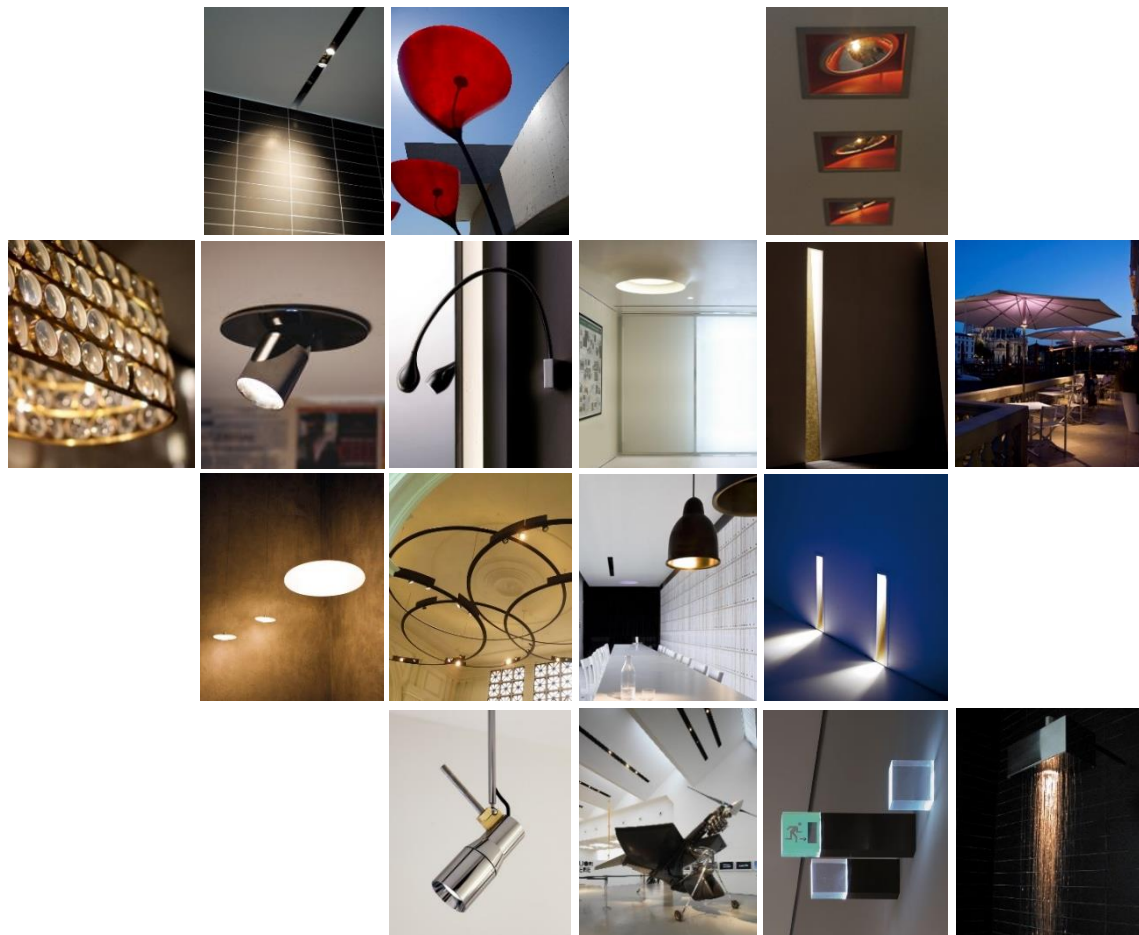

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

