peled soffitto antoni arola 2008

apparecchio di illuminazione a soffitto per interni IP20. realizzato con aste in estruso di alluminio diametro Ø14mm 1200mm collegate a piastra di supporto in acciaio 170x170x4mm con uno snodo sferico che permette una inclinazione fino a 30° rispetto all'asse verticale.
modelli:
peled soffitto con 1 asta,
peled soffitto con 4 aste,
peled soffitto con 8 aste,
peled soffitto con 16 aste.
cablato con sorgente elettronica 3000K Ra98 1W.
alimentatore 240V 50-60Hz incluso.
accessori: giunto, piastra frontale per 1, 4, 8 e 16 aste.
finiture: piastra in inox lucido, nero lucido e bianco V, aste in alluminio verniciato nero lucido, bianco V e argento antico.
personalizza la tua luce vai su

IP20 rated ceiling light fitting for indoor use. made of extruded aluminium rods with a diameter Ø14 mm 1200mm connected to a 170x170x4mm steel support plate with a spherical joint that allows an inclination up to 30° on the vertical axis.
versions:
peled soffitto with 1 rod,
peled soffitto with 4 rods,
peled soffitto with 8 rods,
peled soffitto with 16 rods.
wired with 3000K Ra98 1W led source.
240V 50-60Hz power supply included.
accessories: joint, front plate for 1, 4, 8 and 16 rods.
finishes: bianco V, polished black and polished stainless steel plate, aluminium rods painted in polished black, bianco V and antique silver.
customize your light visit

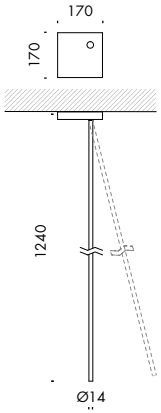

peled soffitto 1	**120-240V 50-60Hz** A	**IP20**	CE
Via.128.0001	bianco V	3000K	1,3
Via.128.0002	nero lucido · polished black	3000K	1,3

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	3,0	79	1	79	**A++**
ca041	les2 ∘	Ta25 °C	vita media · average life		50000 h	L80	B10		

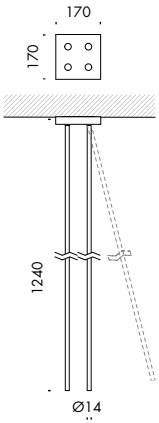

peled soffitto 4	**120-240V 50-60Hz** A	**IP20**	CE
Via.128.0003	bianco V	3000K 4x1W	1,5
Via.128.0004	nero lucido · polished black	3000K 4x1W	1,5

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	12,0	316	4	79	**A++**
ca041-4	les2 ∘	Ta25 °C	vita media · average life		50000 h	L80	B10		

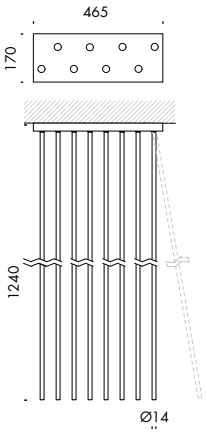

peled soffitto 8	**120-240V 50-60Hz** Ⓐ	**IP20**			CE	
Via.128.0005	bianco V		3000K	8x1W		4,3
Via.128.0006	nero lucido · polished black		3000K	8x1W		4,3

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	24,0	632	8	79	**A++**
ca041-8	les2 ◦	Ta25 °C	vita media · average life			50000 h		L80 B10	

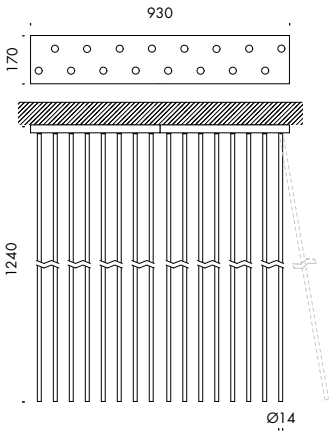

peled soffitto 16	**120-240V 50-60Hz** Ⓐ	**IP20**			CE	
Via.128.0007	bianco V		3000K	16x1W		15
Via.128.0008	nero lucido · polished black		3000K	16x1W		15

Ra	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	350	24,0	1264	16	79	**A++**
ca041-16	les2 ◦	Ta25 °C	vita media · average life			50000 h		L80 B10	

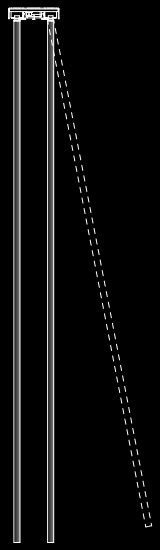

+

1. scegli il modulo delle aste
choose the rod module

2. scegli la piastra di supporto
choose the support plate





Subscribe To Our Newsletter

Cirrus Lighting

Distributor for Viabizzuno
Architectural Lighting Solutions
Web: www.cirruslighting.co.uk
Email: sales@cirruslighting.co.uk
Tel: 0207 193 2175
Fax: 0207 193 3175