

clv2 parete soffitto claudio la viola 2003



**apparecchio di illuminazione da parete e soffitto per interni IP20.
realizzato da un corpo esterno 100x100x50mm in alluminio estruso, cromato o verniciato a polvere, con ottica interna a doppia emissione per luce diffusa.**

modelli:

**clv2 parete soffitto cablato con sorgente elettronica 3000K Ra95 2x6W 2x422lm,
clv2 parete soffitto per lampada alogena G9 max 60W 250V compatta a bassa emissione di ultravioletti.**

alimentatore 110-277V 50-60Hz incluso nella versione a sorgente elettronica.

finiture esterne: alluminio cromato lucido, avorio, moka o bianco V.

finiture interne: verniciato rosso, nero55, avorio o bianco V.

**IP20 rated wall and ceiling light fitting for indoor use.
made of a 100x100x50mm extruded, chrome or powder coated aluminium external body,
with an internal bi-directional optic for diffuse light.**


versions:


**clv2 parete soffitto wired with 3000K Ra95 2x6W 2x422lm led source,
clv2 parete soffitto for G9 max 60W 250V compact halogen lamp with low ultraviolet emissions.**

110-277V 50-60Hz power supply included for the led source version.

external finishes: polished chrome aluminium, moka, nero55, ivory or bianco V.

internal finishes: red painted, nero55, ivory or bianco V.

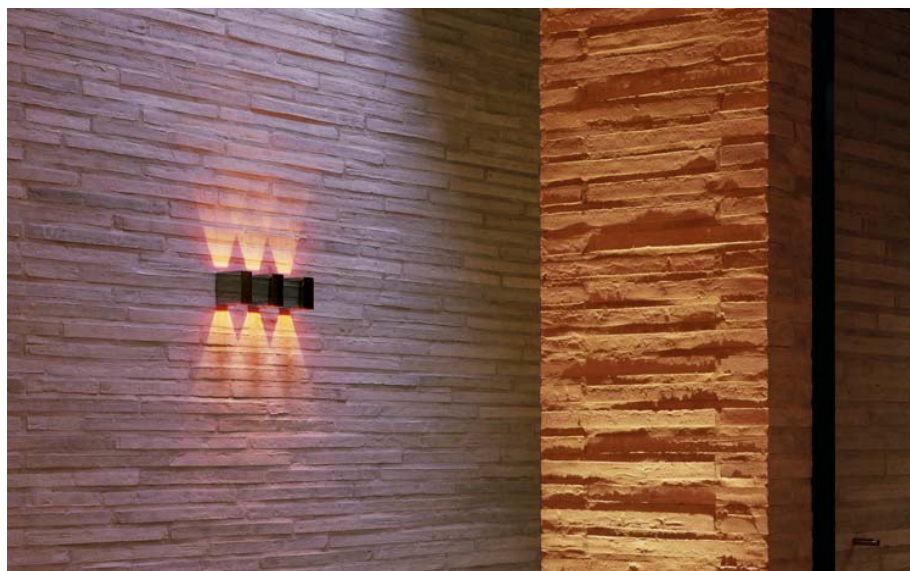



clv2 parete soffitto 110-277V 50-60Hz **IP20**

- Vb6.521.62.27** alluminio cromato lucido - verniciato rosso 2700K 2x6W 0,8
polished chrome aluminium - red
- Vb6.521.64.27** avorio - nero55 · ivory - nero55 2700K 2x6W 0,8
- Vb6.521.72.27** moka - avorio · moka - ivory 2700K 2x6W 0,8
- Vb6.521.74.27** bianco V - bianco V 2700K 2x6W 0,8

I.d. (luce diretta · direct light)

| Ra | ies tm-30 | | sdc | mA | V _{f (min)} | lm | W | lm/W | |
|-------|----------------|--------|---------------------------|-----|----------------------|-----|-----|------|-----------|
| 95 | Rf 92 | Rg 100 | step 2 | 350 | 17 | 422 | 6 | 70 | A+ |
| cd010 | les6 ● Ta25 °C | | vita media · average life | | 50000 h | L70 | B10 | | |

I.i. (luce indiretta · indirect light)

| Ra | ies tm-30 | | sdc | mA | V _{f (min)} | lm | W | lm/W | |
|-------|----------------|--------|---------------------------|-----|----------------------|-----|-----|------|-----------|
| 95 | Rf 92 | Rg 100 | step 2 | 350 | 17 | 422 | 6 | 70 | A+ |
| cd010 | les6 ● Ta25 °C | | vita media · average life | | 50000 h | L70 | B10 | | |


- Vb6.521.62** alluminio cromato lucido - verniciato rosso 3000K 2x6W 0,8
polished chrome aluminium - red
- Vb6.521.64** avorio - nero55 · ivory - nero55 3000K 2x6W 0,8
- Vb6.521.72** moka - avorio · moka - ivory 3000K 2x6W 0,8
- Vb6.521.74** bianco V - bianco V 3000K 2x6W 0,8

I.d. (luce diretta · direct light)

| Ra | ies tm-30 | | sdc | mA | V _{f (min)} | lm | W | lm/W | |
|-------|----------------|--------|---------------------------|-----|----------------------|-----|-----|------|-----------|
| 95 | Rf 92 | Rg 100 | step 2 | 350 | 17 | 455 | 6 | 76 | A+ |
| cd011 | les6 ● Ta25 °C | | vita media · average life | | 50000 h | L70 | B10 | | |

I.i. (luce indiretta · indirect light)

| Ra | ies tm-30 | | sdc | mA | V _{f (min)} | lm | W | lm/W | |
|-------|----------------|--------|---------------------------|-----|----------------------|-----|-----|------|-----------|
| 95 | Rf 92 | Rg 100 | step 2 | 350 | 17 | 455 | 6 | 76 | A+ |
| cd011 | les6 ● Ta25 °C | | vita media · average life | | 50000 h | L70 | B10 | | |




clv2 parete soffitto alogena 250V 50-60Hz **IP20**

- a6.521.02** alluminio cromato lucido - verniciato rosso G9 max 60W 0,8
polished chrome aluminium - red
- a6.521.04** avorio - nero55 · ivory - nero55 G9 max 60W 0,8
- a6.521.12** moka - avorio · moka - ivory G9 max 60W 0,8
- a6.521.14** bianco V - bianco V G9 max 60W 0,8





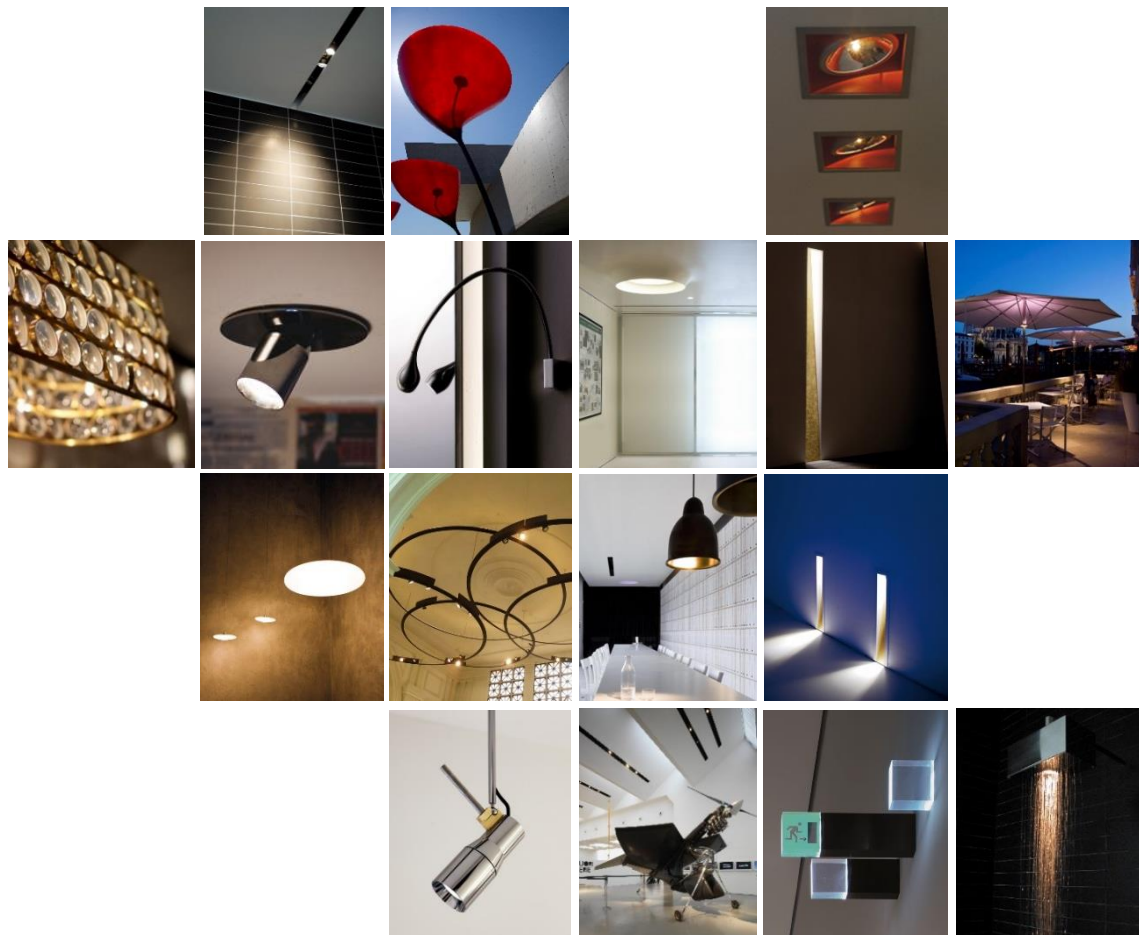

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

