





corpo illuminante da terra per interni IP20, realizzato con 2 bracci in acciaio controllati da un sistema di leve e molle che garantiscono la frizione. massima estensione braccio 4750mm. diffusore luminoso di dimensioni 400x308mm. braccio orientabile di 180° sull'asse orizzontale, diffusore luminoso orientabile su asse verticale e orizzontale. cablato con sorgente led 2700K o 3000K 22,4W 2140lm. disponibile con ottica 28°. alimentatore 220-240V 50-60Hz incluso, con cavo rivestito in tessuto l.3000mm e presa schuko. dimmerabile con potenziometro rotativo. finitura: acciaio brunito trattato a cera.

IP20-rated floor-standing light fitting for indoor use made of two stainless steel arms controlled by clutch springs and levers. maximum arm extension: 4750mm. light diffuser measuring 400x308mm. the arm can be adjusted by 180° on the horizontal axis, the light diffuser can be adjusted both on the horizontal and vertical axis. wired with 2700K or 3000K 22,4W 2140lm led source. available with 28° optics. 220-240V 50-60Hz power supply unit included, with 3000mm long textile cable and schuko socket. dimmable with a rotary potentiometer. finish: waxed burnished steel.

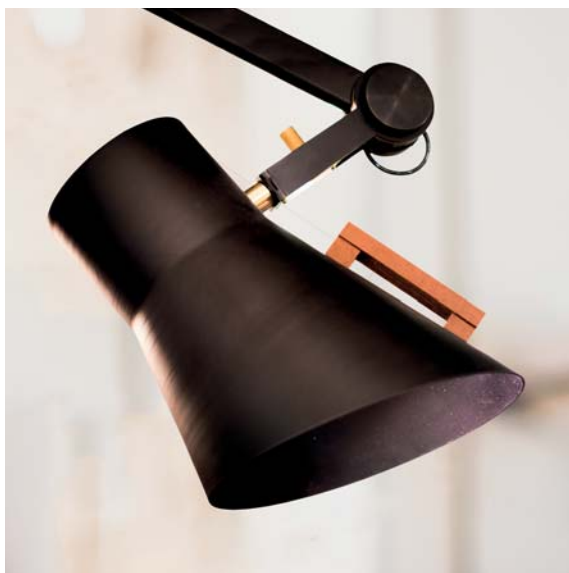

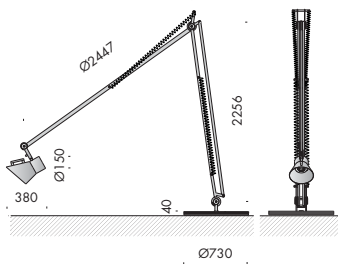

anselmo terra

240V 50-60 Hz **A**

⊕ IP20

⚠ CE

Vb4.567.21.27 acciaio brunito trattato a cera 2700K
wax finished burnished steel



Vb4.567.21.30 acciaio brunito trattato a cera 3000K
wax finished burnished steel

V led.x/98


Ra	R9	selezione macadam macadam selection	lm	W	lm/W	classe energetica energy class
98	98	step 1	2140	22,3	96	A+

vita media/average life 50000 h Ta 25°C/L80 - B10 - F10

esempio di illuminazione
example of lighting

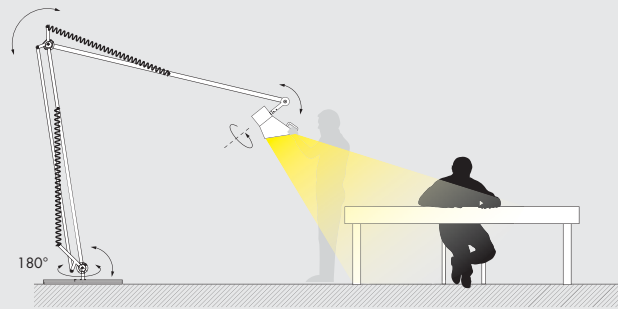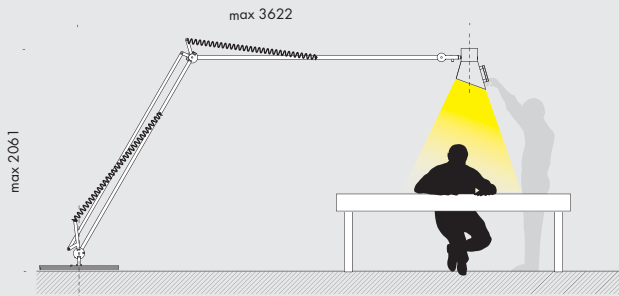



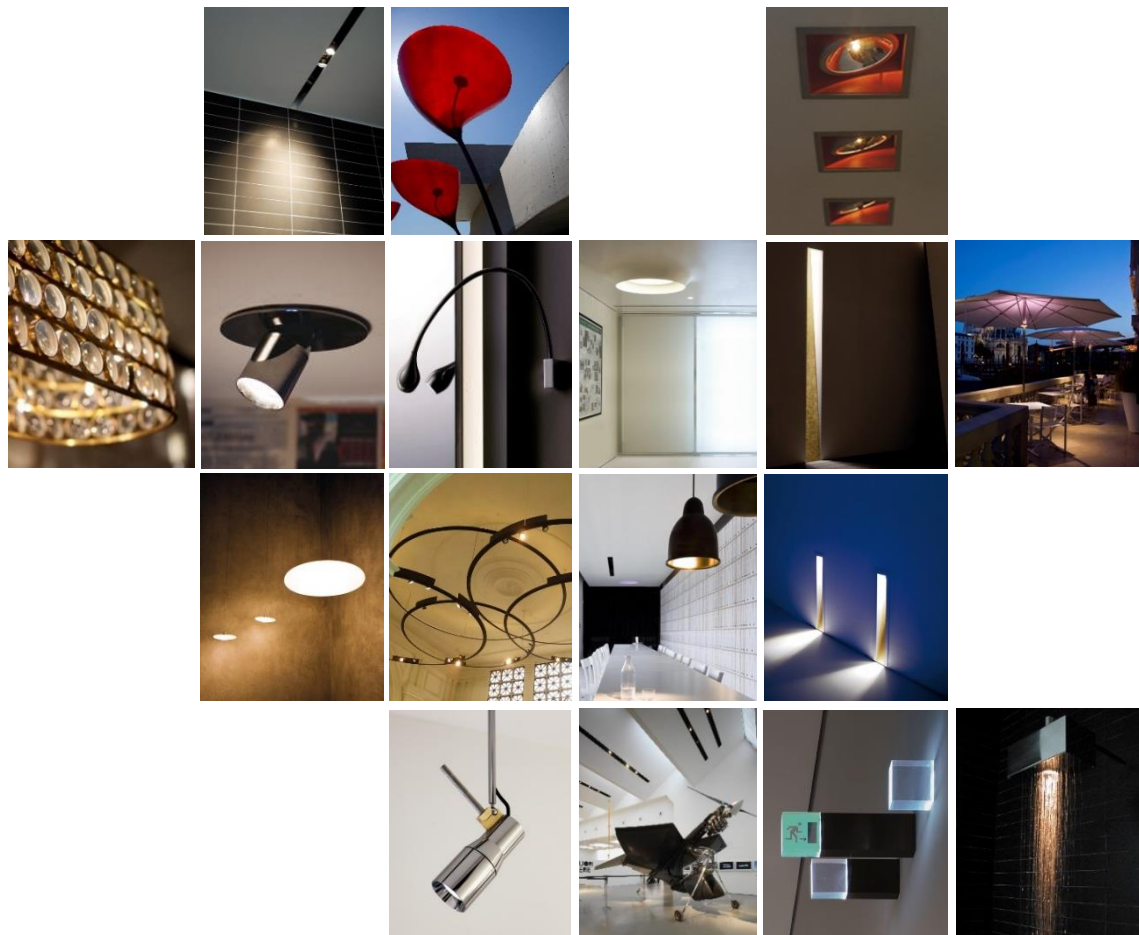

**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

