



**apparecchio di illuminazione da
incasso per interni ed esterni
IP67.**

**realizzato con corpo cilindrico
diametro Ø170mm h.162mm
in alluminio ossidato, borchia
in alluminio lucidato e vetro
trasparente antiurto IK08.**

modelli:

**m444 con ottiche 18° 36° 73°,
m444 wallwasher con palpebra
antiabbagliamento.**

**cablato con sorgente elettronica
2700K o 3000K fino a 22,3W
2798lm.**

**alimentatore in corrente
costante incluso.**

**accessori: cassaforma laterizio.
finiture: corpo nero, borchia
alluminio lucido.**

**IP67 rated recessed light fitting
for indoor and outdoor use.
made of an oxidized aluminium
cylindrical body diameter
Ø170mm h.162mm, a polished
aluminium bezel and IK08
shock-resistant transparent
glass.**


versions:

**m444 with 18° 36° 73° optics,
m444 wallwasher with anti-
glare eyelid.**

**wired with 2700K or 3000K led
source up to 22.3W 2798lm.
constant current power supply
included.**

**accessories: brickwork housing.
finishes: black fitting, polished
aluminium bezel.**






m444 240V 50/60Hz **IP67 IK08**

- Vb6.615.01.27** corpo nero - borchia alluminio lucido 2700K 18° 1,2
black body - polished bezel aluminium
- Vb6.615.02.27** corpo nero - borchia alluminio lucido 2700K 36° 1,2
black body - polished bezel aluminium
- Vb6.615.03.27** corpo nero - borchia alluminio lucido 2700K 73° 1,2
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	650	34,3	2603	22,3	117	A++
ci010	les14 ● Ta25 °C		vita media · average life			50000 h	L80	B10	

- Vb6.615.01.30** corpo nero - borchia alluminio lucido 3000K 18° 1,2
black body - polished bezel aluminium
- Vb6.615.02.30** corpo nero - borchia alluminio lucido 3000K 36° 1,2
black body - polished bezel aluminium
- Vb6.615.03.30** corpo nero - borchia alluminio lucido 3000K 73° 1,2
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	650	34,3	2798	22,3	125	A++
ci011	les14 ● Ta25 °C		vita media · average life			50000 h	L80	B10	




m444 wallwasher 240V 56-60Hz **IP67 IK08**

- Vb6.615.08.27** corpo nero - borchia alluminio lucido 2700K 1,2
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	650	34,3	2603	22,3	117	A++
ci010	les14 ● Ta25 °C		vita media · average life			50000 h	L80	B10	

- Vb6.615.08.30** corpo nero - borchia alluminio lucido 3000K 1,2
black body - polished bezel aluminium

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	650	34,3	2798	22,3	125	A++
ci011	les14 ● Ta25 °C		vita media · average life			50000 h	L80	B10	

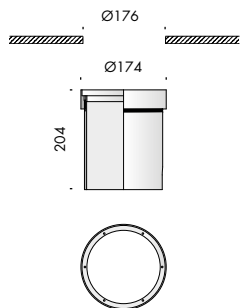

accessori. accessories.




Vb6.615.90 cassaforma laterizio · brick housing

0,4

valori lux ricavati
considerando le seguenti distanze:
lux values obtained by considering the
following distances:


$z=h$ $y=0,25h$ $x=y$

$z=4000\text{mm}$
 $y=1000\text{mm}$
 $x=1000\text{mm}$

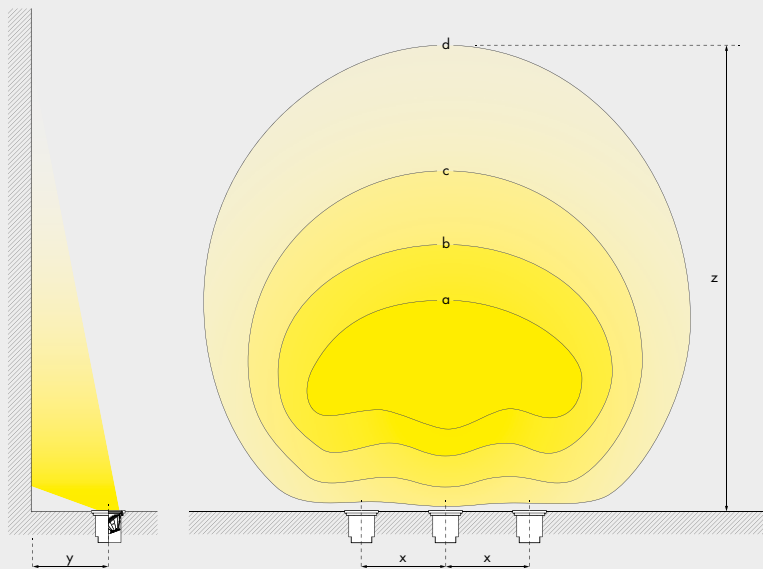

a 117 lux
b 88 lux
c 58 lux
d 30 lux



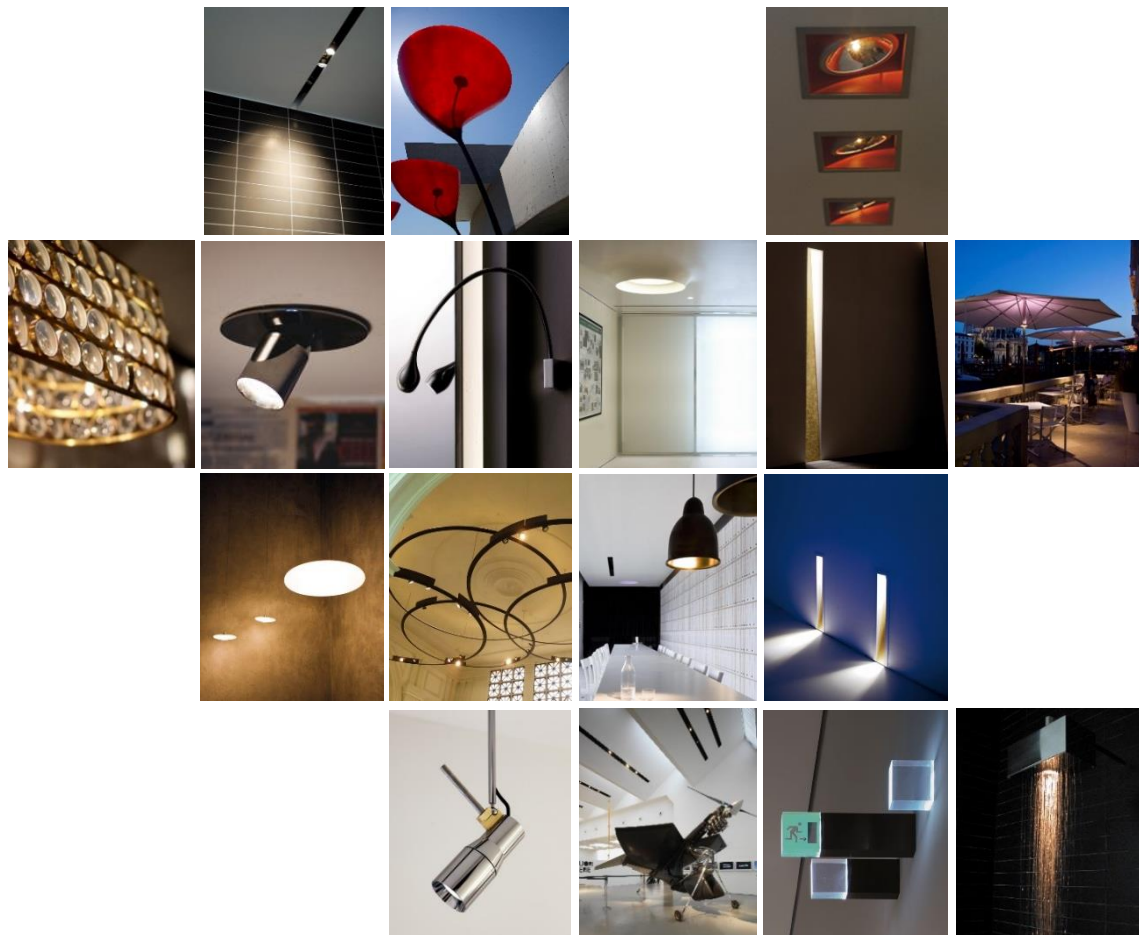

Subscribe To Our Newsletter



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

