




**corpo illuminante per esterni IP55.
realizzato con tubo trafilato dn.40
in acciaio inox 316L sagomato alla
sommità.
altezza massima 4350mm fuori terra.
larghezza massima 1340mm.
testa palo di forma conica
con diametro massimo 460mm,
altezza 290mm.
cablato con sorgente led 3000K 26W.
disponibile con ottiche 18°, 26°, 48°.
alimentatore 110-277V 50-60Hz
incluso.
finiture: acciaio inox satinato
passivato.**


**IP55-rated light fitting for outdoor use.
made of a 316L stainless steel 40
nominal diameter drawn tube which
is shaped at the top.
4350mm maximum height
above ground.
1340mm maximum width.
conic-shaped pole head with
a maximum diameter of 460mm
and a maximum height of 290mm.
wired with 3000K 26W led source.
available with 18°, 26°, 48° optics.
110-277V 50-60Hz power supply unit
included.
finish: passivated satin stainless steel.**

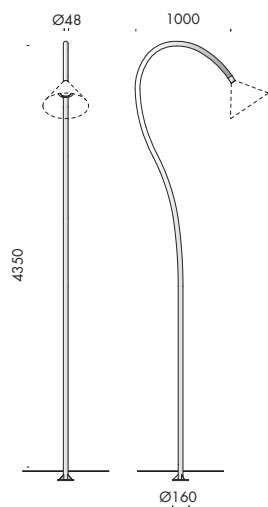

lilia palo		CE	
-------------------	--	----	--

F4.211.01 acciaio inox satinato passivato
passivated matt stainless steel

26,5



componenti. components.

CE

F9.211.91 tirafondo incassato
anchor bolt

1,5







kit		A	K	⊕	IP55	CE	i
Vb9.183.91	kit led acciaio inox satinato passivato passivated matt stainless steel led kit	led 3000K		18°			
Vb9.183.92	kit led acciaio inox satinato passivato passivated matt stainless steel led kit	led 3000K		26°			
Vb9.183.93	kit led acciaio inox satinato passivato passivated matt stainless steel led kit	led 3000K		48°			




Ra	selezione macadam macadam selection	lm	W	lm/W	classe energetica energy class
90	step 2	1827	14	131	A++
		2430	20	122	A++
		3465	30,5	114	A+


tensione minima sul secondario/minimum voltage on the secondary 26,6V
vita media/average life 50000 h Ta 25°C/L80 - B10 - F10



esempio di installazione
installation example

la tacca (Y) presente sul tirafondi indica la direzione del palo
the notch (Y) on the anchor bolt marks the pole's direction

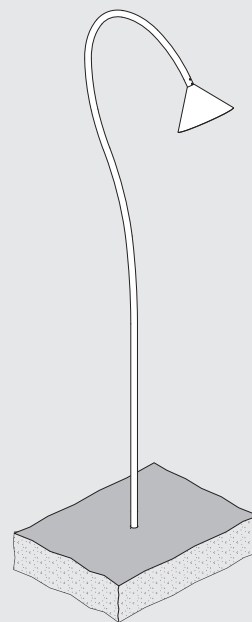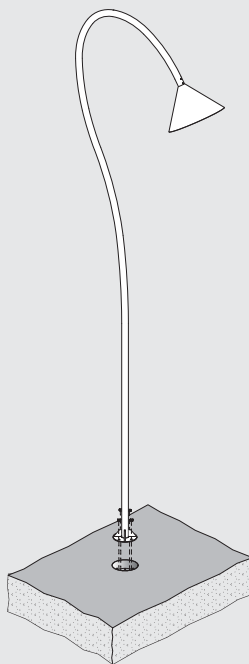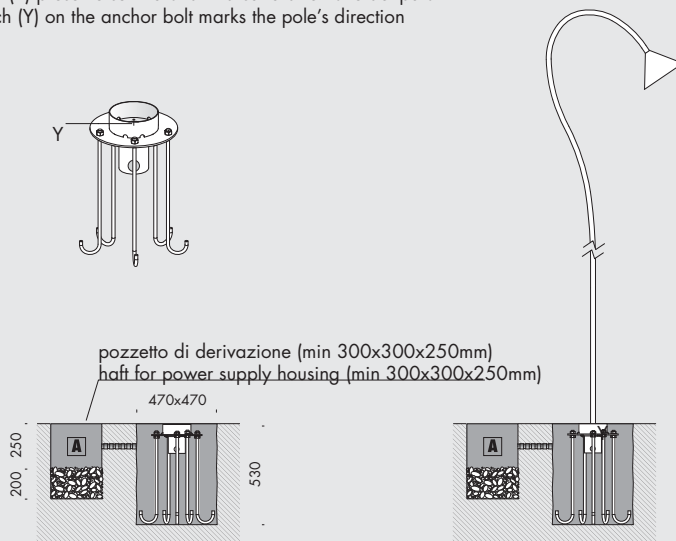

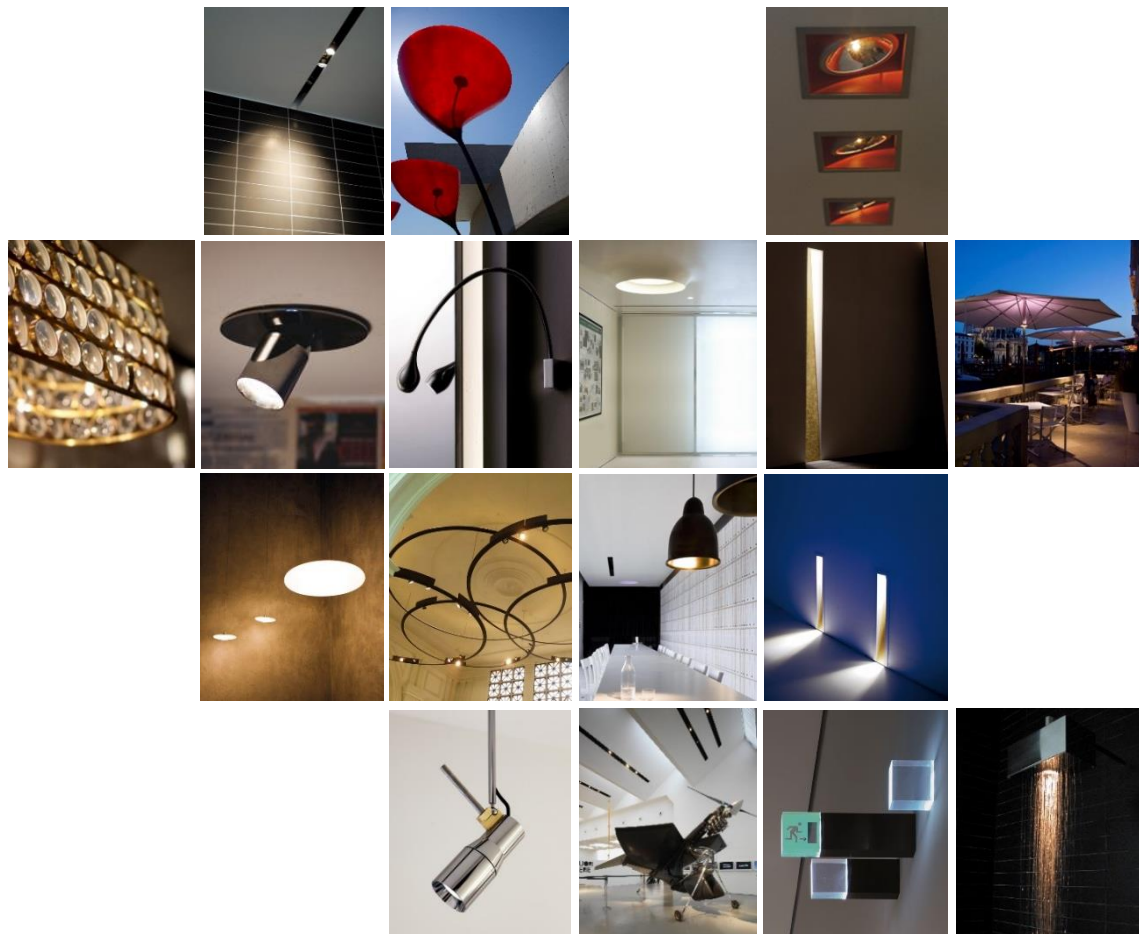

Contact Us



**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

