ansa david chipperfield mario nanni 2013




apparecchio di illuminazione a soffitto e sospensione per interni IP20.
realizzato in alluminio e vetro rudentato diametro Ø136mm h.500mm.
modelli:
ansa soffitto,
ansa sospensione con tige rigida h.1000mm completa di rosone.
cablato con sorgente elettronica 3000K Ra98 24,4W per luce diretta con ottiche 19° e 38° e 3000K Ra95 5W per luce indiretta.
alimentatore 240V 50-60Hz incluso.
fi niture: argento hacca e vetro rudentato trasparente.


IP20 rated ceiling or suspended light fi tting for indoor use.
made of aluminium or grooved glass, Ø136mm h.500mm.
versions:
ansa soffi tto,
ansa sospensione with h.1000mm long rigid suspension rod rose included.
wired with 3000K Ra98 24,4W led source for direct light with 19° and 38° optics and 3000K Ra95 5W for indirect light.
240V 50-60Hz power supply included.
fi nishes: argento hacca and transparent grooved glass.







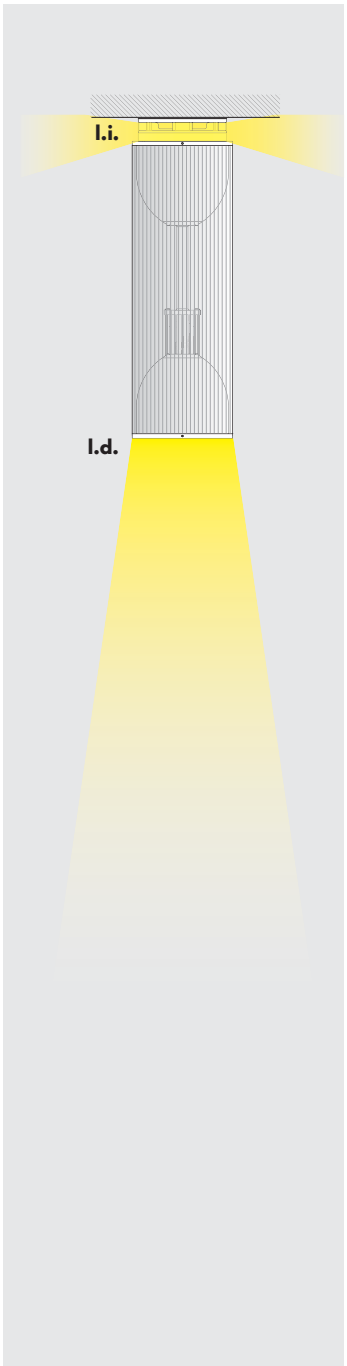

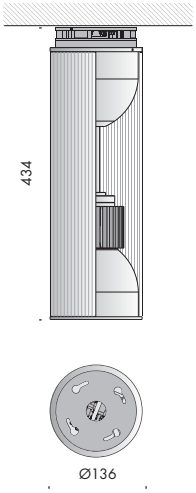


ansa soffitto	**240V 50-60Hz**	**IP20**					
Vb6.038.11	argento hacca vetro rudentato - grooved glass	3000K	l.d. 24,4W l.i. 5W	19°	4,5		
Vb6.038.12	argento hacca vetro rudentato - grooved glass	3000K	l.d. 24,4W l.i. 5W	38°	4,5		

l.d. (luce diretta · direct light)

Ra	R9	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	850	28,7	2508	24,4	103	**A+**
xm001	les19	Ta25 °C		vita media · average life			70000 h		L80 B10	

l.i. (luce indiretta · indirect light)

Ra	R9	ies tm/30		sdcm	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	**A+**
V0001	5,9	Ta25 °C		vita media · average life			50000 h		L80 B10

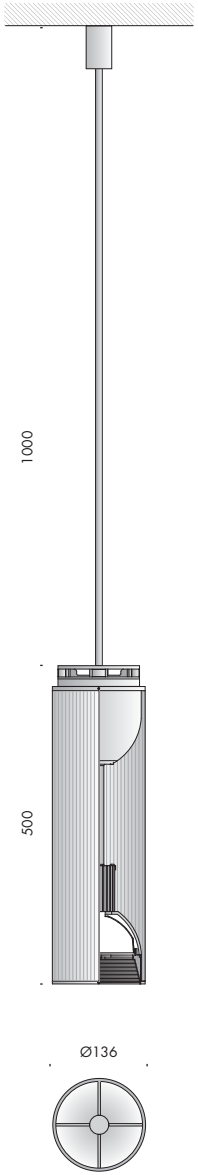

ansa sospensione	240V 50-60Hz	IP20	


Vb8.038.41	argento hacca vetro rudentato - grooved glass	3000K	l.d. 24,4W l.i. 5W	19°	4,5
Vb8.038.42	argento hacca vetro rudentato - grooved glass	3000K	l.d. 24,4W l.i. 5W	38°	4,5


l.d. (luce diretta · direct light)


Ra	R9	ies tm-30		sdcm	mA	$V_{f\,(min)}$	lm	W	lm/W	
98	98	Rf 96	Rg 103	step 1	850	28,7	2508	24,4	103	**A+**
xm001	les19	Ta25 °C		vita media · average life			70000 h		L80	B10


l.i. (luce indiretta · indirect light)

Ra	R9	ies tm/30		sdcm	Vf	lm/m	W/m	lm/W	
95	90	Rf 93	Rg 102	step 2	24	1250	13	96	**A+**
V0001	5,9	Ta25 °C		vita media · average life			50000 h		L80	B10

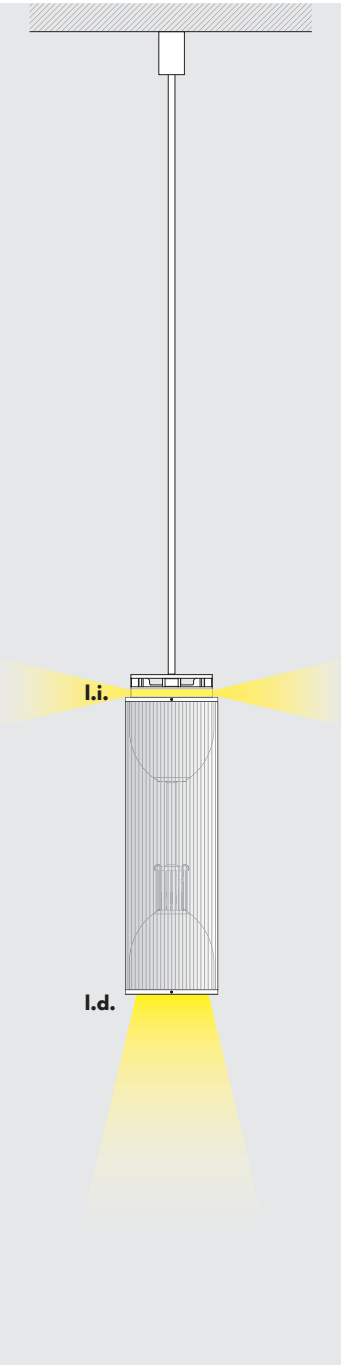

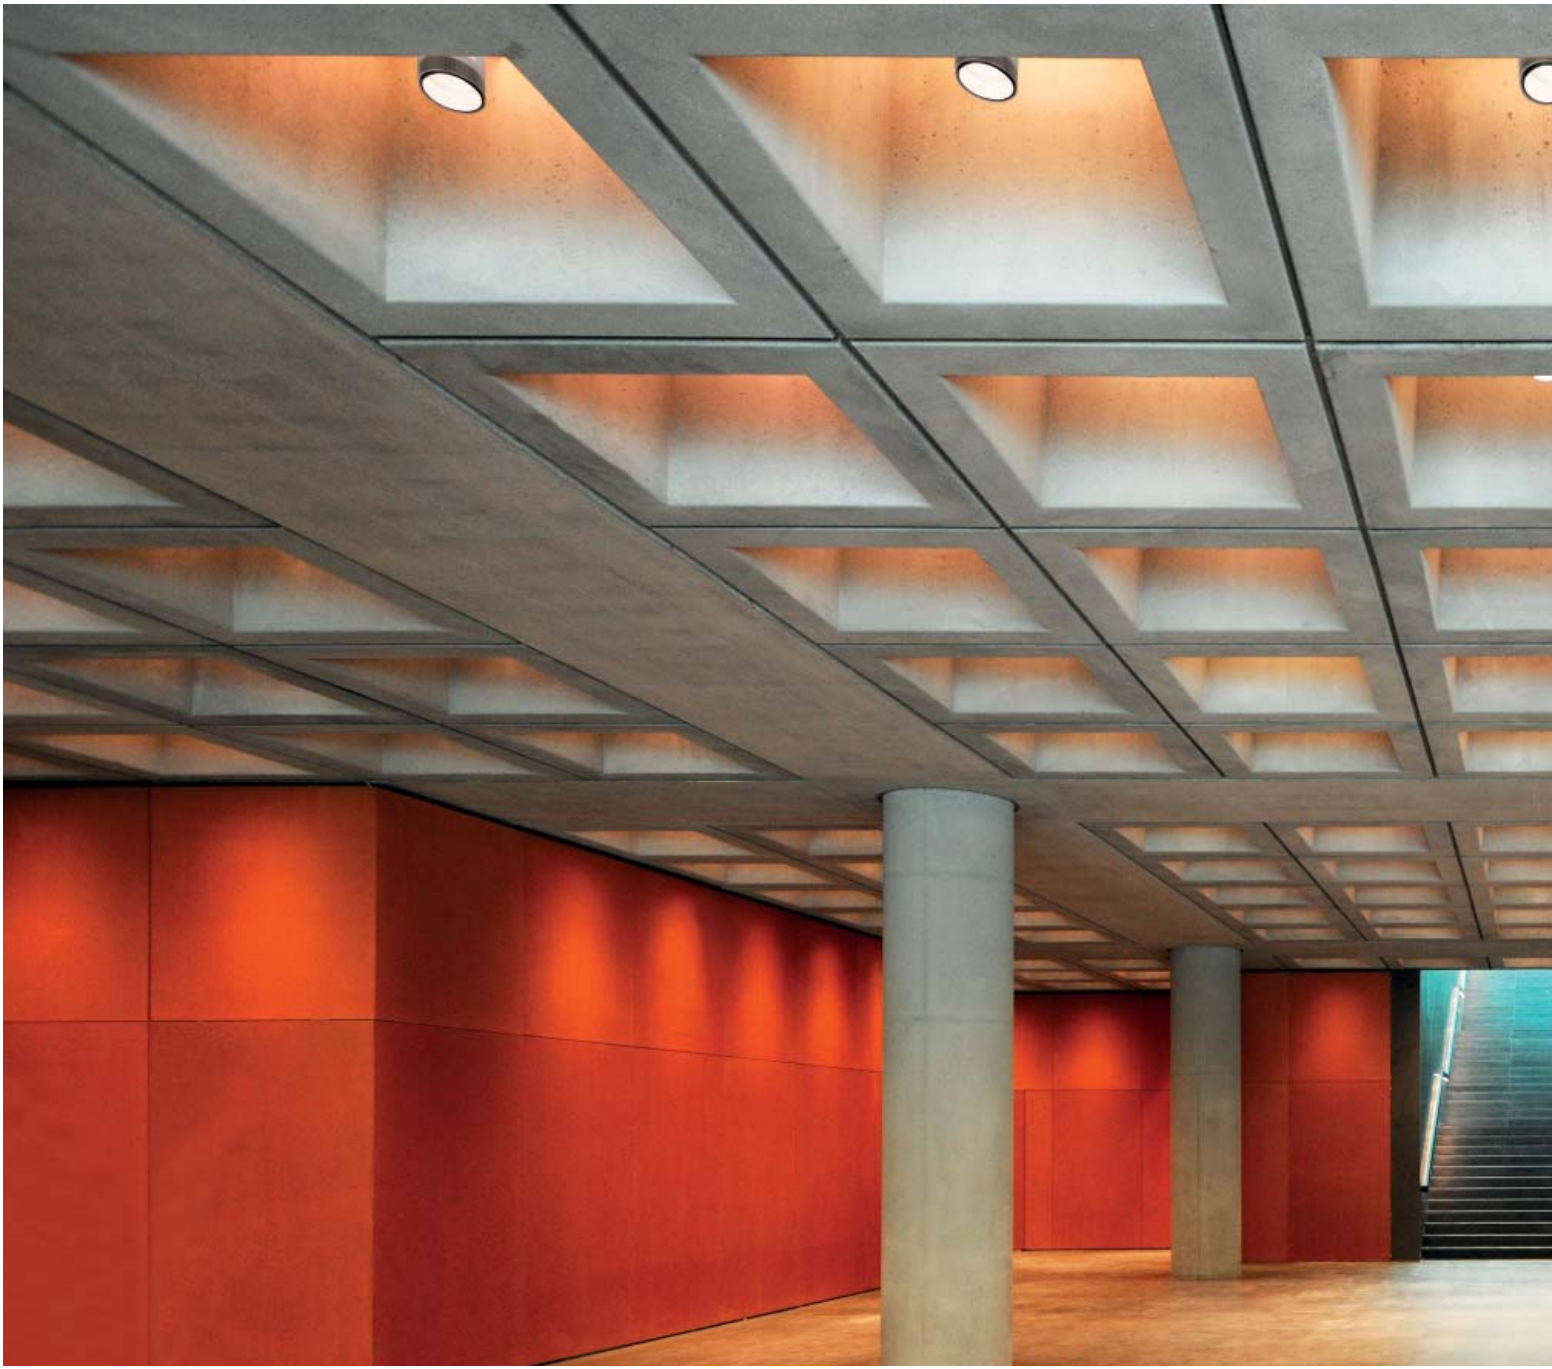

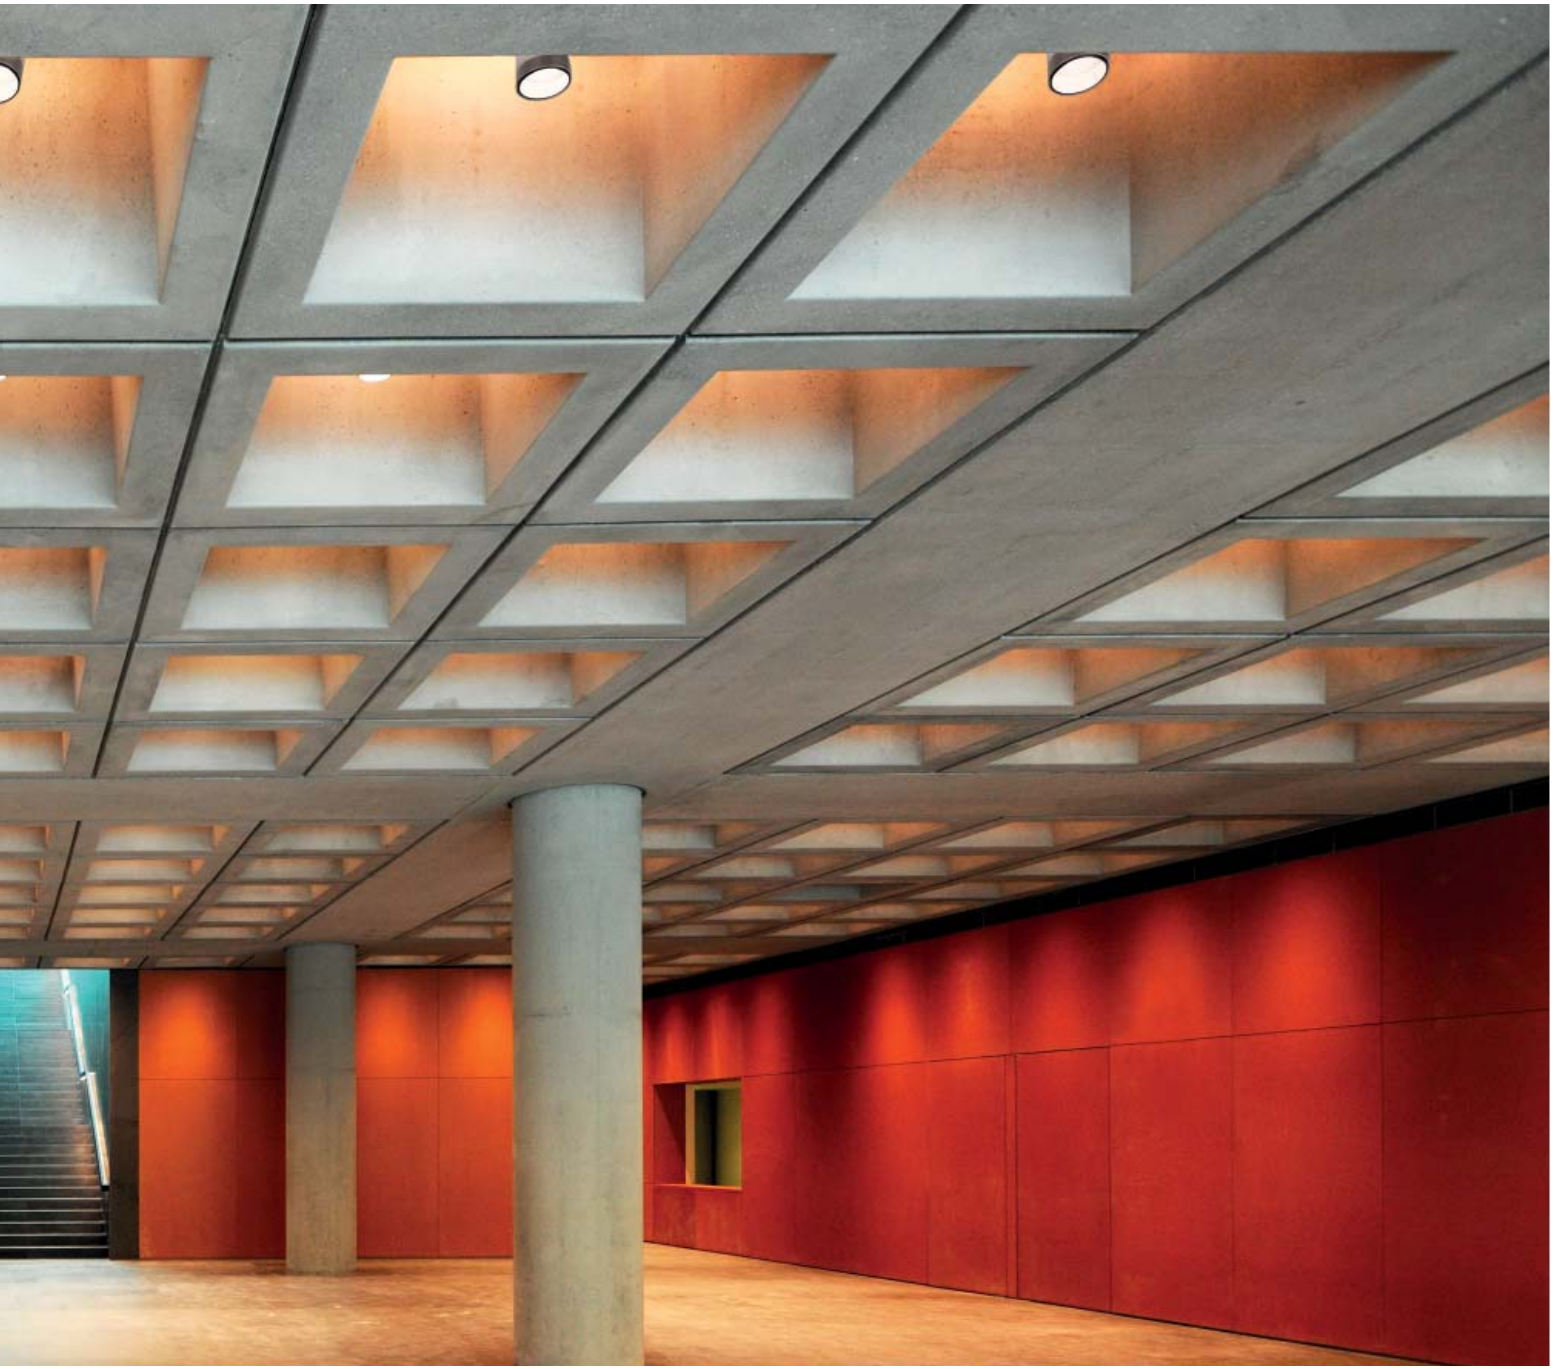

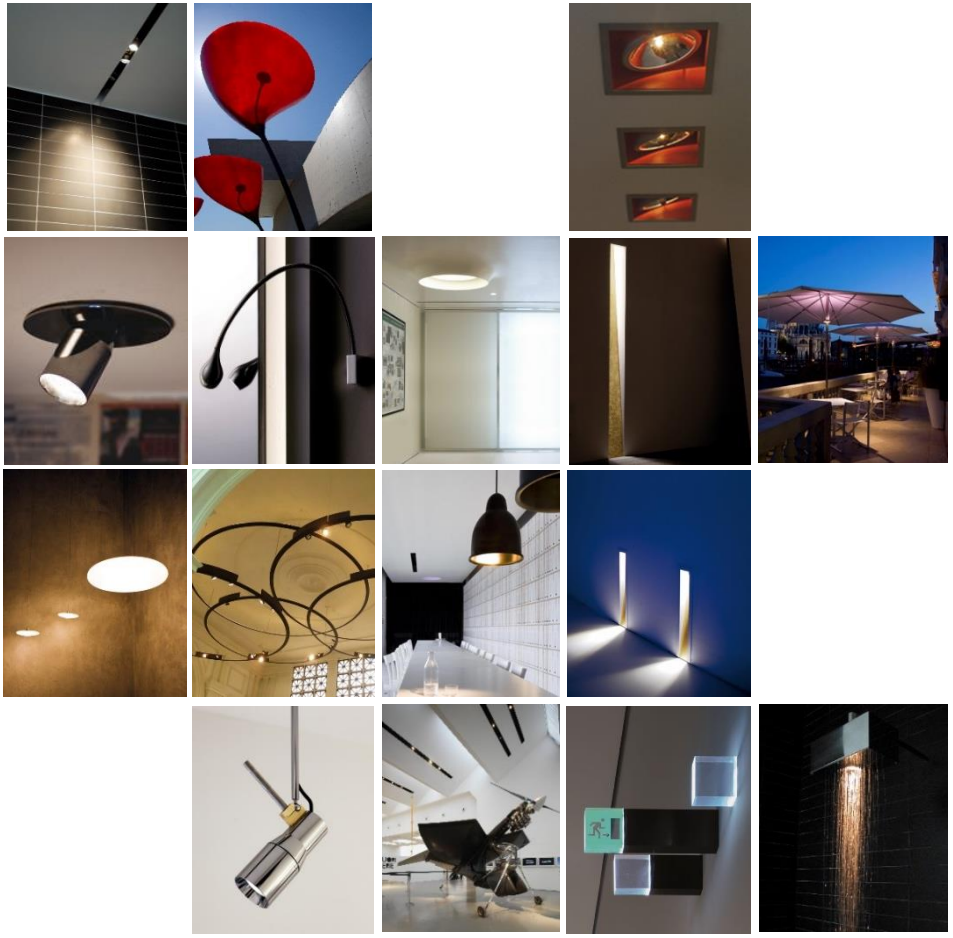

Subscribe To Our Newsletter

Cirrus Lighting

Distributor for Viabizzuno
Architectural Lighting Solutions
Web: www.cirruslighting.co.uk
Email: sales@cirruslighting.co.uk
Tel: 0207 193 2175
Fax: 0207 193 3175