


bacchetta magica mario nanni 2000



corpo illuminante per interni ed esterni IP65 in policarbonato trasparente resistente ai raggi uv. può essere installata su pareti e soffitti utilizzando i ganci forniti di serie e, tramite l'apposito kit, anche a sospensione (cavo l. 3000mm). la versione HE è disponibile nelle dimensioni: 945mm, 1545mm, 1640mm, 1845mm e 1940mm ed è cablata per alloggiare rispettivamente lampade fluorescenti G5 14W, 28W e 35W HE. la versione HO è disponibile nelle dimensioni: 945mm, 1545mm e 1640mm ed è cablata per alloggiare rispettivamente lampade fluorescenti G5 24W e 54W HO.

IP65 lighting fixture for indoor and outdoor applications in transparent uv resistant polycarbonate. it can be installed on walls and ceilings and even in the suspended version, by means of the apposite kit (l. 3000mm cable). HE version is available in dimensions: 945mm, 1545mm, 1640mm, 1845mm e 1940mm and it is wired respectively for fluorescent lamps G5 14W, 28W and 35W HE. HO version is available in dimensions: 945mm, 1545mm, 1640mm and it is wired respectively for fluorescent lamps G5 24W and 54W HO.






bacchetta magica HE 240V 50-60Hz

F6.116.01 policarbonato trasparente
transparent polycarbonate


G5 14W HE 0,9



cd/klm
— C0C180 — C90C270


14W

| h | d1 | d2 | Em | Emax |
|----|----|------|----|------|
| 1m | 3 | 3 | 99 | 321 |
| 2m | 6 | 5,9 | 25 | 80 |
| 3m | 9 | 8,9 | 11 | 36 |
| 4m | 12 | 11,9 | 6 | 20 |



F6.116.05 policarbonato trasparente
transparent polycarbonate


G5 28W HE 1,4



cd/klm
— C0C180 — C90C270


28W

| h | d1 | d2 | Em | Emax |
|----|----|------|-----|------|
| 1m | 3 | 3 | 154 | 499 |
| 2m | 6 | 5,9 | 39 | 125 |
| 3m | 9 | 8,9 | 17 | 55 |
| 4m | 12 | 11,9 | 10 | 31 |




F6.116.05.D1 policarbonato trasp. dimm 1-10V
trasp. polycarbonate dimm 1-10V

G5 28W HE 1,5




F6.116.05.D2 policarbonato trasp. dimm dali
trasp. polycarbonate dimm dali

G5 28W HE 1,5



F6.116.07 policarbonato trasparente
transparent polycarbonate


G5 35W HE 1,6



cd/klm
— C0C180 — C90C270


35W

| h | d1 | d2 | Em | Emax |
|----|----|------|-----|------|
| 1m | 3 | 3 | 268 | 867 |
| 2m | 6 | 5,9 | 67 | 217 |
| 3m | 9 | 8,9 | 30 | 96 |
| 4m | 12 | 11,9 | 17 | 54 |



F6.116.07.D1 policarbonato trasp. dimm 1-10V
trasp. polycarbonate dimm 1-10V

G5 35W HE 1,7




F6.116.07.D2 policarbonato trasp. dimm dali
trasp. polycarbonate dimm dali







G5 35W HE 1,7

esempio di installazione
cod. F9.116.81
installation example
code F9.116.81

incasso
recessed




scomparsa totale
trimless

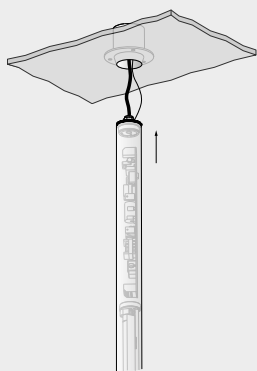

bacchetta magica HO 240V 50-60Hz

F6.116.11 policarbonato trasparente
transparent polycarbonate

G5 24W HO 0,9



| cd/klm | | C0C180 | | C90C270 | |
|--------|----|--------|-----|---------|--|
| h | d1 | d2 | Em | Emax | |
| 1m | 3 | 3 | 103 | 339 | |
| 2m | 6 | 5,9 | 26 | 85 | |
| 3m | 9 | 8,9 | 11 | 38 | |
| 4m | 12 | 11,9 | 6 | 21 | |

F6.116.15 policarbonato trasparente
transparent polycarbonate


G5 54W HO 1,4

F6.116.15.D1 policarbonato trasp. dimm 1-10V
transp. polycarbonate dimm 1-10V

G5 54W HO 1,5

F6.116.15.D2 policarbonato trasp. dimm dali
transp. polycarbonate dimm dali

G5 54W HO 1,5



| cd/klm | | C0C180 | | C90C270 | |
|--------|----|--------|-----|---------|--|
| h | d1 | d2 | Em | Emax | |
| 1m | 3 | 3 | 257 | 847 | |
| 2m | 6 | 5,9 | 64 | 212 | |
| 3m | 9 | 8,9 | 29 | 94 | |
| 4m | 12 | 11,9 | 16 | 53 | |

accessori. accessories.

F9.116.05 rosone acciaio lucido
canopy polished stainless steel

0,2

F9.116.06 kit per sospensione
suspension kit

l. 3000mm

0,2

F9.116.81 supporto incasso
recessed support

0,2





**Distributor for Viabizzuno
Architectural Lighting Solutions**

Web: www.cirruslighting.co.uk

Email: sales@cirruslighting.co.uk

Tel: 0207 193 2175

Fax: 0207 193 3175

